Poolstar



Catalogue
2027-2028

20 years of innovation, passion and commitment

Since 2006, our ambition has remained the same: to offer professionals in the pool and wellness sectors innovative, efficient and accessible solutions.
In 20 years, Poolstar has grown, expanded its expertise and built an ever more comprehensive range.

Initially known for our heat pumps, we now cover the entire technical room with the latest generation of connected equipment, a wellness collection designed for a range of uses, and a variety of complementary solutions.

This evolution is driven by our ongoing investment in teams, tools and services.

Based in Rousset, near Aix-en-Provence, Poolstar designs, develops and manages projects from France while accelerating international growth. Our continued success relies on three pillars: team expertise, our ability to innovate, and close partnerships.

20 years also means 20 years of trust.

Thank you to all our clients and partners whosupport and inspire us to move forward. The adventure continues—**we will keep innovating, making things simpler, and imagining tomorrow's solutions.**

The Poolstar team

Poolstar is a member of the Federation of Pool Professionals.



sum-mary

• **THE GROUP** **4**
Latest news and innovation from Poolstar

• **POOLEX** **14**

Pro heating and cooling **22**
Heat pumps for pools and spas.

Pro filtration **54**
Filtration pumps, cartridge filters and sand filters.

Pro treatment **80**
Electrolysers and dosing pumps.

Multichannel pool equipment **98**
Heat pumps, water treatment, filtration and Poolican.

Pool extras **118**
Fire protection, garden showers, aquafitness.

• **HOLL'S** **154**

Indoor and outdoor saunas. 156

Nordic baths 190

• **NETSPA** **204**
Collection of semi-rigid spas and ice baths.

• **FRANCE SAUNA** **212**
Collection of indoor and outdoor saunas.

Poolstar

Since 2006, Poolstar has designed and developed at its headquarters in Rousset, southern France, equipment dedicated to pools, wellness and aquatic sports and leisure.

Over 20 years, the group has grown, broadened its expertise and expanded its reach, all with the same goal: making innovation high-performing and accessible.

Expertise, spanning 3 sectors



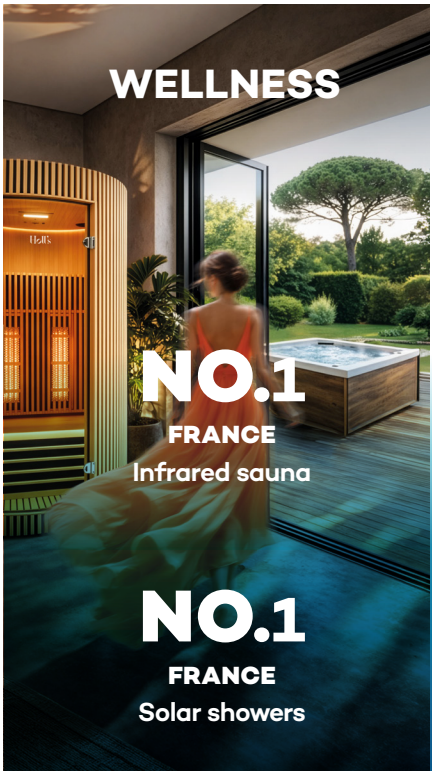



+20%
GROWTH
in 2025 and 2026

+50
COUNTRIES SERVED
worldwide

+80
EMPLOYEES
in Europe

Our brands

POOLEX · WATTSUP · Waterflex · Holl's
skiffo · COSTO · France Sauna · NET SPA

Integrated R&D
from design to testing

Design

Observing how products are used, anticipating market needs and devising fresh solutions.

Develop

Product design, engineering, prototyping and refinement are all carried out by our in-house teams.

Test & Validate

Prototypes and finished products are tested both on test benches and in real-world conditions to measure, adjust and validate their performance.

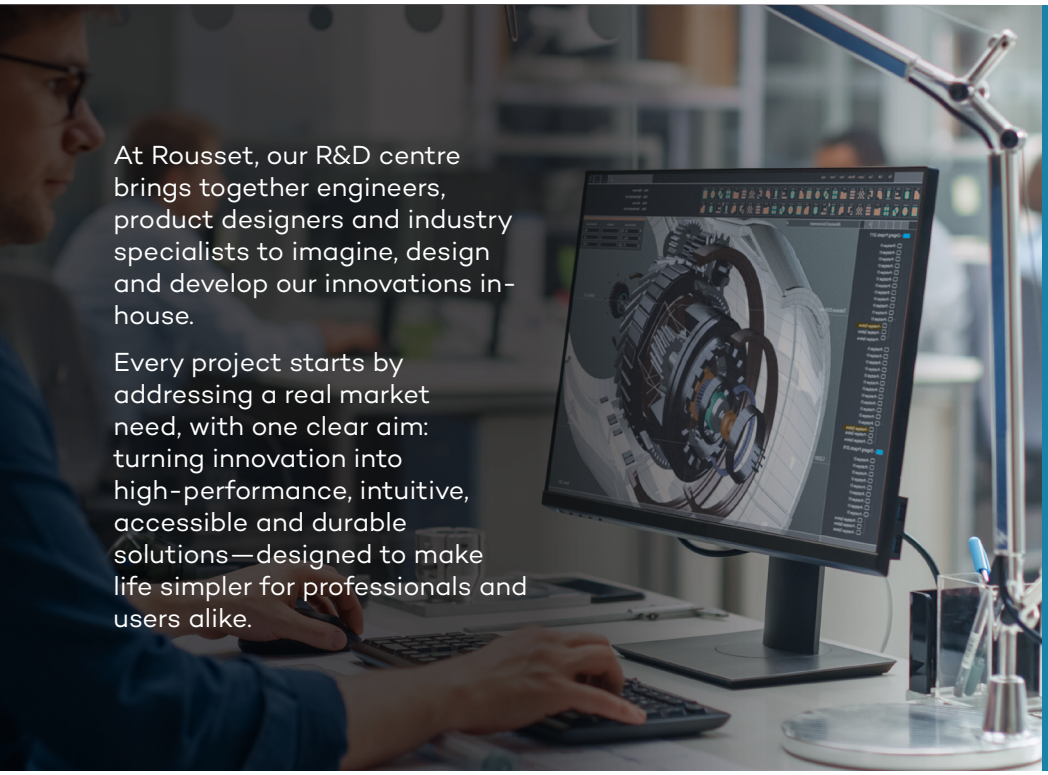

At Rousset, our R&D centre brings together engineers, product designers and industry specialists to imagine, design and develop our innovations in-house.

Every project starts by addressing a real market need, with one clear aim: turning innovation into high-performance, intuitive, accessible and durable solutions—designed to make life simpler for professionals and users alike.

400 m²
dedicated to product testing

+100
tests conducted every year

< 3 %
return rate in 2026

Quality standards at every stage

From concept to validation, every stage is dedicated to a single goal: lasting improvement of performance, reliability and quality in our products.

Innovation at the heart of development

"To innovate is to turn market needs into solutions that are reliable, high-performing and easy to install and use."

Logistical power driving your responsiveness

In Rousset, our logistics centre **manages our entire stock and shipping operations**, ensuring fast, efficient service for our partners in France and worldwide.

27,000 m²
logistics platform

33
loading bays

Up to 700
orders shipped per day at peak season

650
containers shipped per year



Infrastructure to match your ambitions

Availability, Responsiveness, Flexibility

Available stock
To quickly meet our customers' needs.

Fast shipping
A network built to handle high volumes, even during peak season.

Drop Shipping
Direct delivery to the end customer, for greater flexibility.

Services designed for professionals

Beyond products, our teams support professionals every day with services designed to ***make your business easier, expand your expertise and help you better serve your customers.***

Expertise by your side



Training

Product and technical training led by our experts,
helping you gain skills and independence.



Pro hotline

Product specialists on hand to support our partners and resolve technical issues.



Video assistance

Remote support from our technicians to help diagnose and solve problems quickly.



Network of refrigeration engineers

A network of professionals delivering technical support on site.

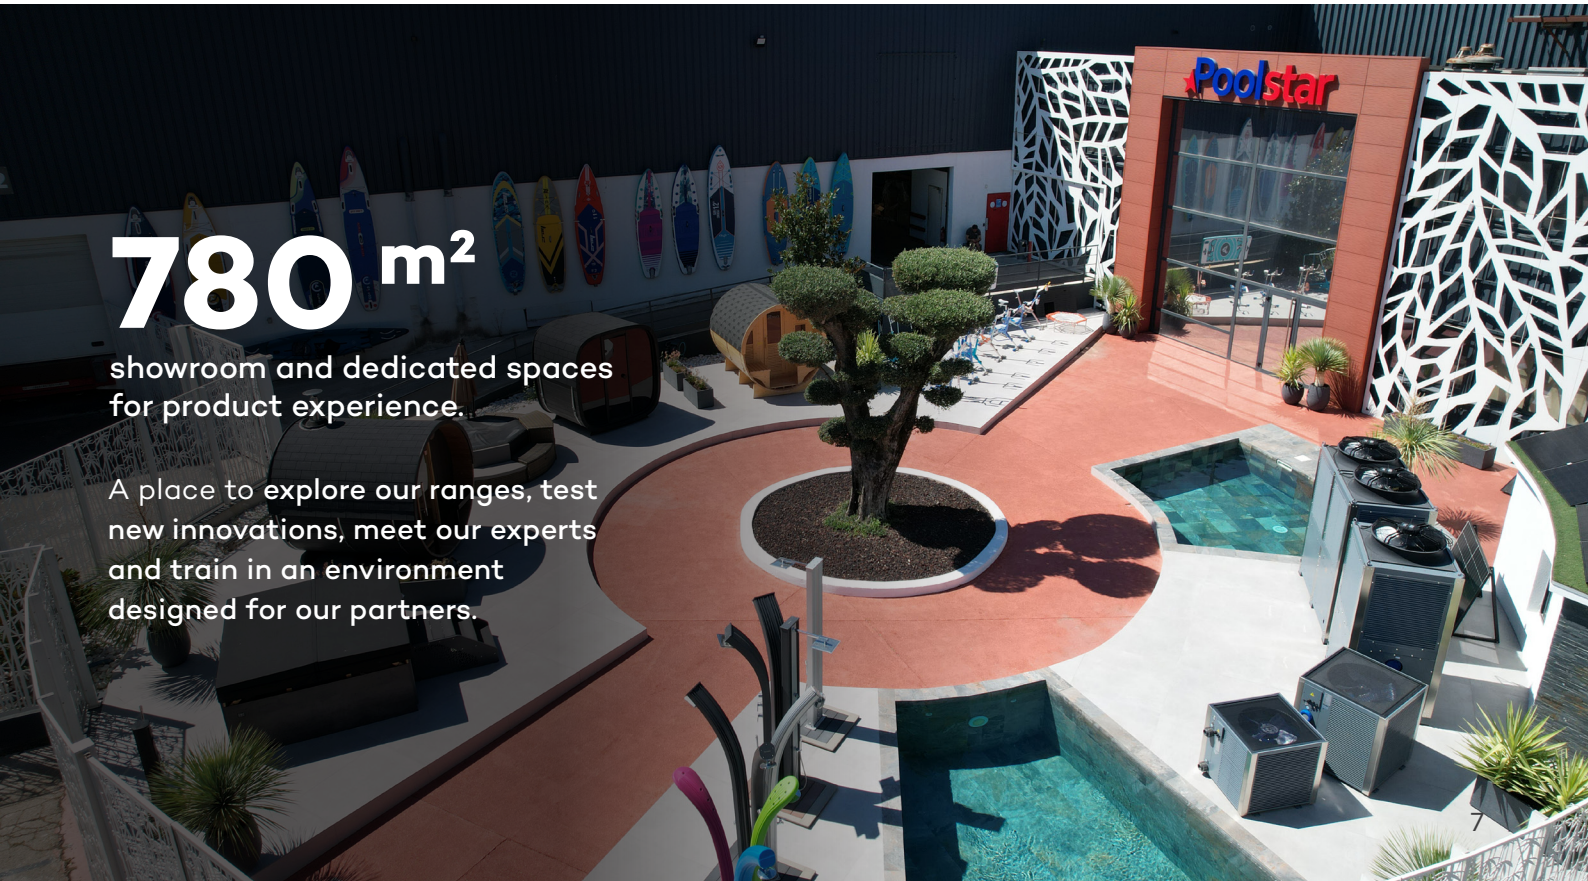

780 m²

showroom and dedicated spaces for product experience.

A place to **explore our ranges, test new innovations, meet our experts and train in an environment designed for our partners.**

CSR.

Concrete commitments, a recognised achievement.



Our CSR approach is guided by **continuous improvement,** backed by **tangible commitments** to develop our products, practices and partnerships.

Durable products

- Repairability
- Spare parts
- Refurbishment

Reduced impact

- Lower energy consumption
- Recycled materials
- Waste reduction

Responsible relationships

- Ethics charter
- Supplier audits
- Compliance

Supported partners

- French after-sales service
- Technical support
- Training

Find your
sales contact

Teams close to your markets.

In **France** and inte**rnationally, ou**r sales teams understand your challenges, markets and field realities.

Dedicated contacts by your side to advise, support and advance your projects.



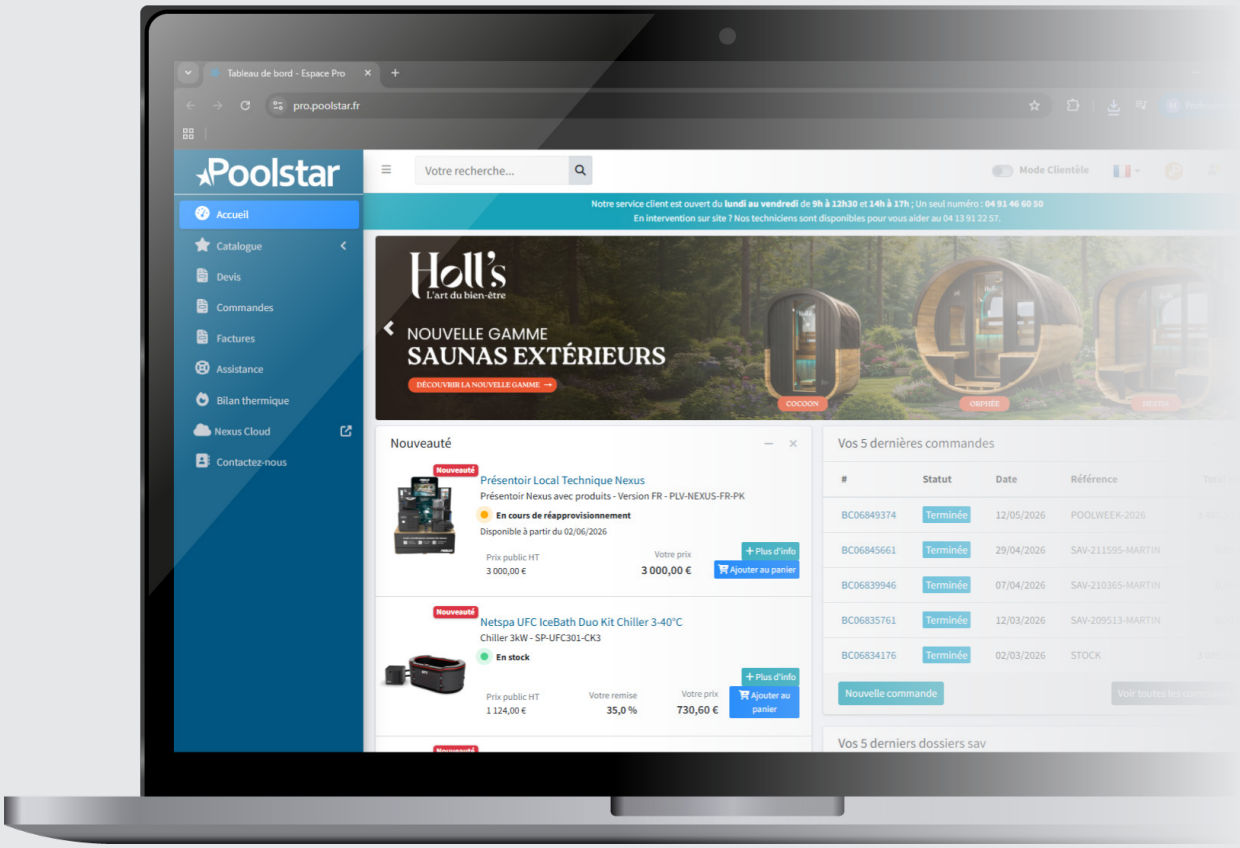

Your pro space, a unique tool to manage everything, simply

Order & Track
Place orders, create quotes and consolidate your purchases in just a few clicks.

Stock status
Check stock levels, restock dates, and find equivalent power options.

Logistics tracking
Monitor the status of your orders in detail.

Invoices
Easily access all your invoices.

Sell and advise
Sales support tools. Access product sheets, manuals, and photo packs.

Customer mode
Hide certain information during client meetings.

Video tutorials
Find installation tips and advice.

Install & Assist
Remote assistance via video call with a Poolstar technician.

After-sales tools
Access the spare parts shop and FAQs.

After-sales cases
Track the progress of your after-sales service cases.

Pool fleet supervision
Nexus supervision software for installations monitoring and remote intervention.

Star club

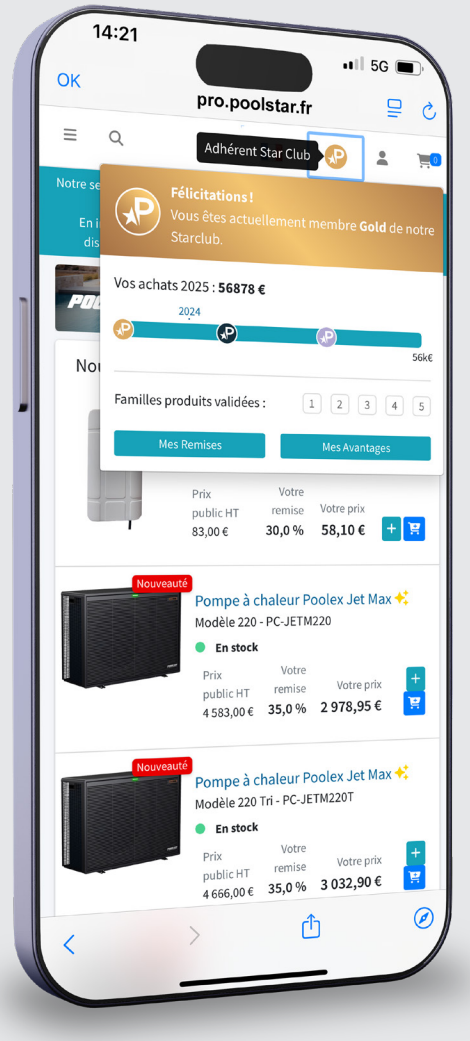

Your loyalty rewarded

The loyalty programme that gives you access to discounts, exclusive services and unique commercial advantages. The further you progress, the more rewards you earn.

A partnership **win-win**

Membership level is determined according to purchase volume made during year N-1.

Discount levels automatically increase with each threshold reached.

Access commercial advantages and exclusive services that grow with each level.

For more information, visit your pro space Poolstar:
pro.poolstar.fr

The 4 levels of the programme

SILVER GOLD PLATINIUM DIAMOND

Tools to enhance your point of sale

Poolstar supports you with POS solutions designed to showcase our brands, enhance their visibility and simplify your customers' journey.



Product sheets

Clear, comprehensive materials to inform and persuade.



Catalogues

Inspiring spaces to let your customers explore the full range of our collections.





Totems

Large-format displays for maximum in-store visibility.



Find all your in-store materials at **pro.poolstar.fr**



Jolly go shower display stand

A powerful showcase for our solar showers.



NEXUS

The technical room

A technical room in action.

- ✓ **In-store functionality**
  Products at work and filled with water
- ✓ **Integrated sales pitch**
  Explanatory *video and brochure included*
- ✓ **Designed for the point of sale**
  79 × 160 cm footprint / 200 cm high, on pallet






POOLEX
A new vision of the technical room:
connected, smart and autonomous.


IA
Jet
POOLEX
POOLEX

POOLEX CONNECTIVITY

NEXUS



Cloud intelligence at the heart of your pools.

MORE INTELLIGENCE, NO CENTRAL HUB.

HOW DOES IT WORK?

CONNECTED AND INTERCONNECTED EQUIPMENT.

Poolex Nexus relies on connectivity built directly into the equipment. Filtration, heating, treatment, photovoltaics: each device communicates with the Poolstar AI Cloud and works with the others to orchestrate the pool's operation continuously.

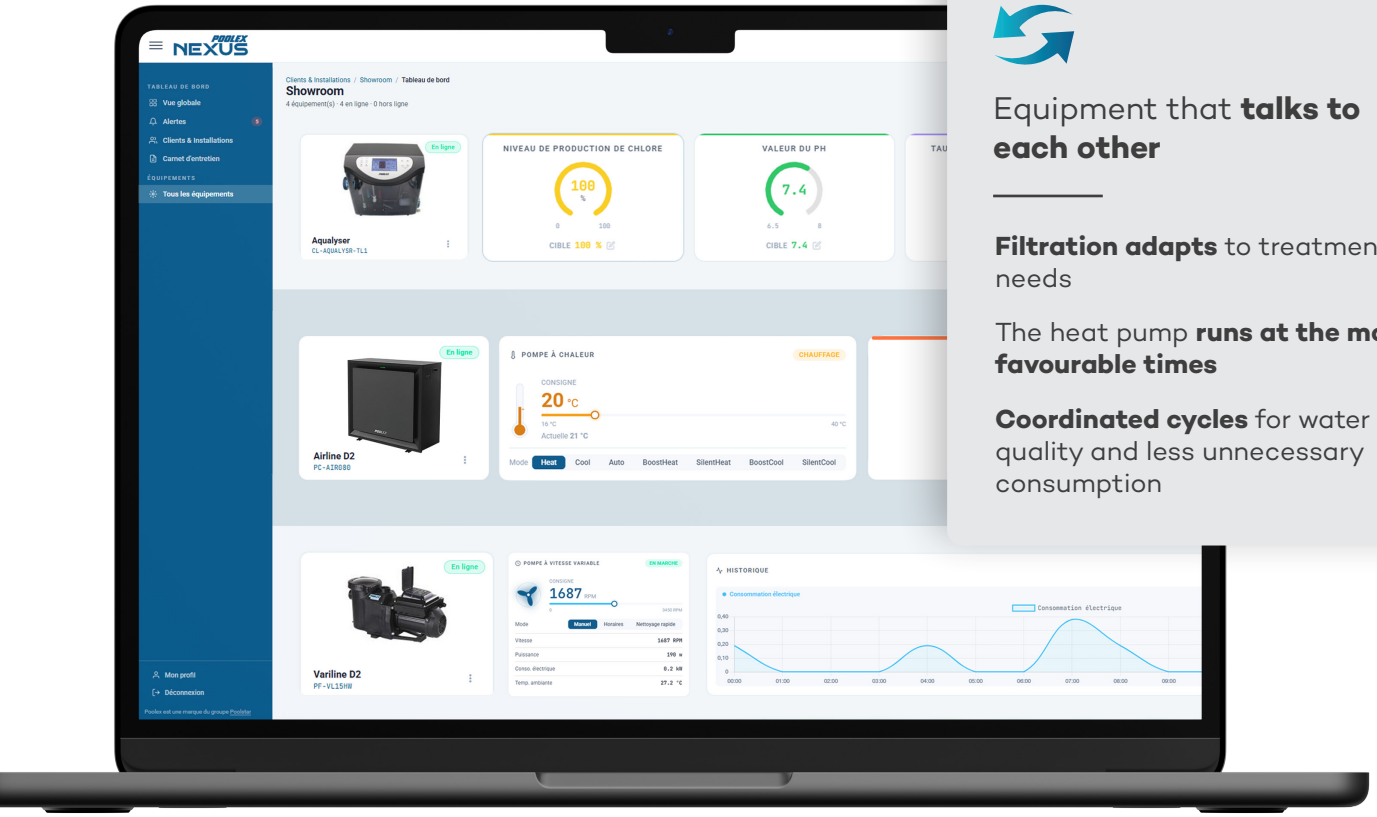

Equipment that **talks to each other**

Filtration adapts to treatment needs

The heat pump **runs at the most favourable times**

Coordinated cycles for water quality and less unnecessary consumption

WHY NEXUS?

- **Native integration**
- **No central hub**
- **A single interface**
- **No subscription, no monthly fees**
- **Proven products with OTA updates**
- **A scalable platform**

TANGIBLE BENEFITS

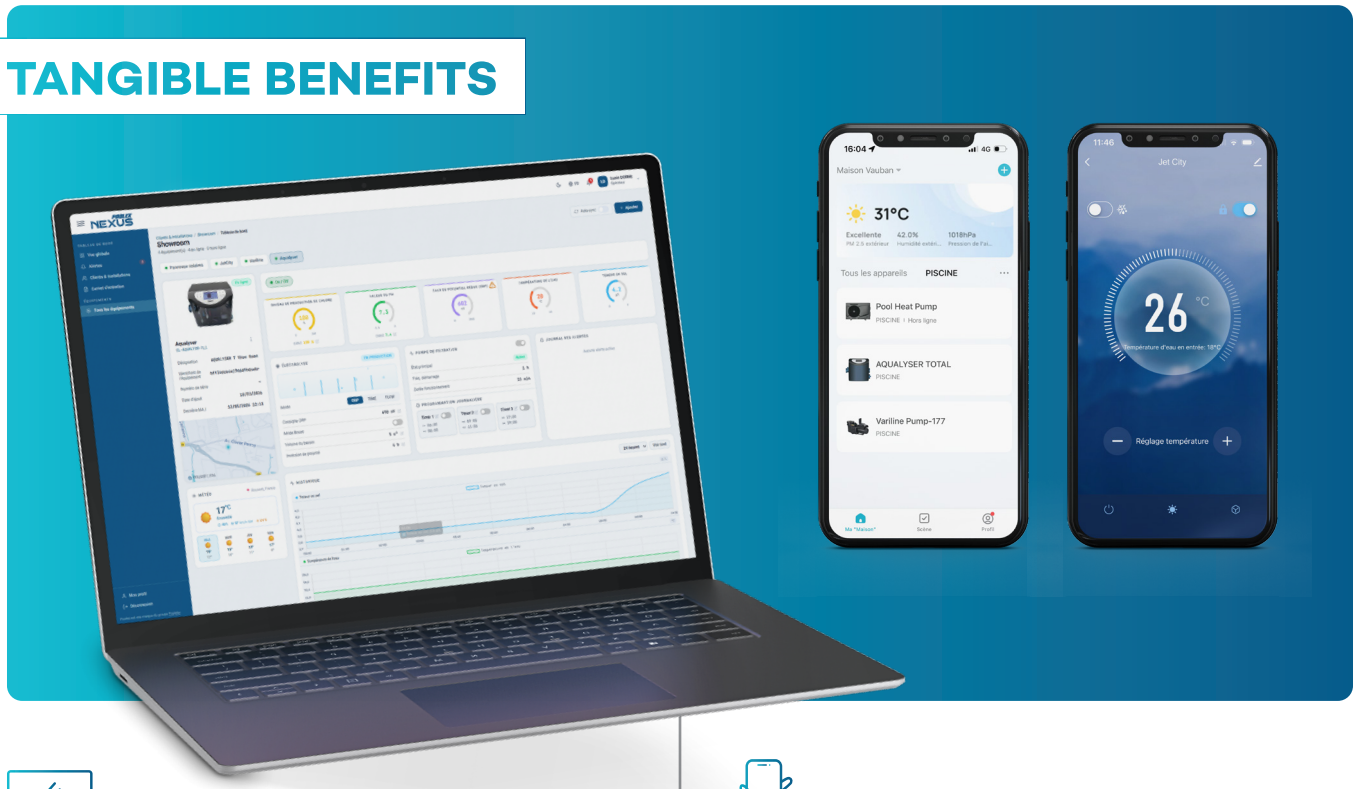

For professionals

Your installed base on a single screen, from pro.poolstar.fr

MULTI-POOL SUPERVISION

Step in before the customer reports a problem.
- Multi-customer installed base view
- Real-time alerts
- Parameter history

OPTIMISED SERVICE CALLS

Fewer unnecessary trips.
- Remote diagnostics
- Remote intervention
- Poolstar after-sales service access to factory settings

ADDITIONAL SALES

Consumables, maintenance, replacements.
- Maintenance log
- Complete, exportable history for each pool.

Your customers buy a pool.

*You deliver **a connected experience.***

For your customers

A pool that is easier to manage and performs better

- ✓ **A single app for all equipment**: Configure, control remotely, monitor water in real time, receive alerts.
- ✓ **Continuous automated control (on-board AI)**: Adjusted filtration, controlled temperature, regulated treatment, coordinated equipment.
- ✓ **Connected support**: The professional accesses data remotely, with the customer's consent.
- ✓ **Smart scenarios**: Pool Party, Weather alert, second home, going on holiday...

I want to throw a pool party this weekend!

Before: *temperature 28°, faster filtration, disinfectant boost, lights on at 7 pm.*

After: *extended filtration, shock chlorine, heating in eco mode.*



FOR YOUR SHOWROOM



A real-life scenario **of a technical room in action.**

A working technical room in store

Equipment running with circulating water

Built-in sales pitch

Explainer film and brochure included

Designed for the point of sale

79 × 160 cm footprint / 200 cm high, on a pallet.

Already available for your store on pro.poolstar.fr

Selling the complete technical room made easy.

Nexus controls it. Our pro configurator sizes it.

Pump, filter, salt chlorinator, heat pump: the configurator in your pro area equips the whole pool in minutes, with your net prices.

POOLEX NEXUS CONFIGURATOR

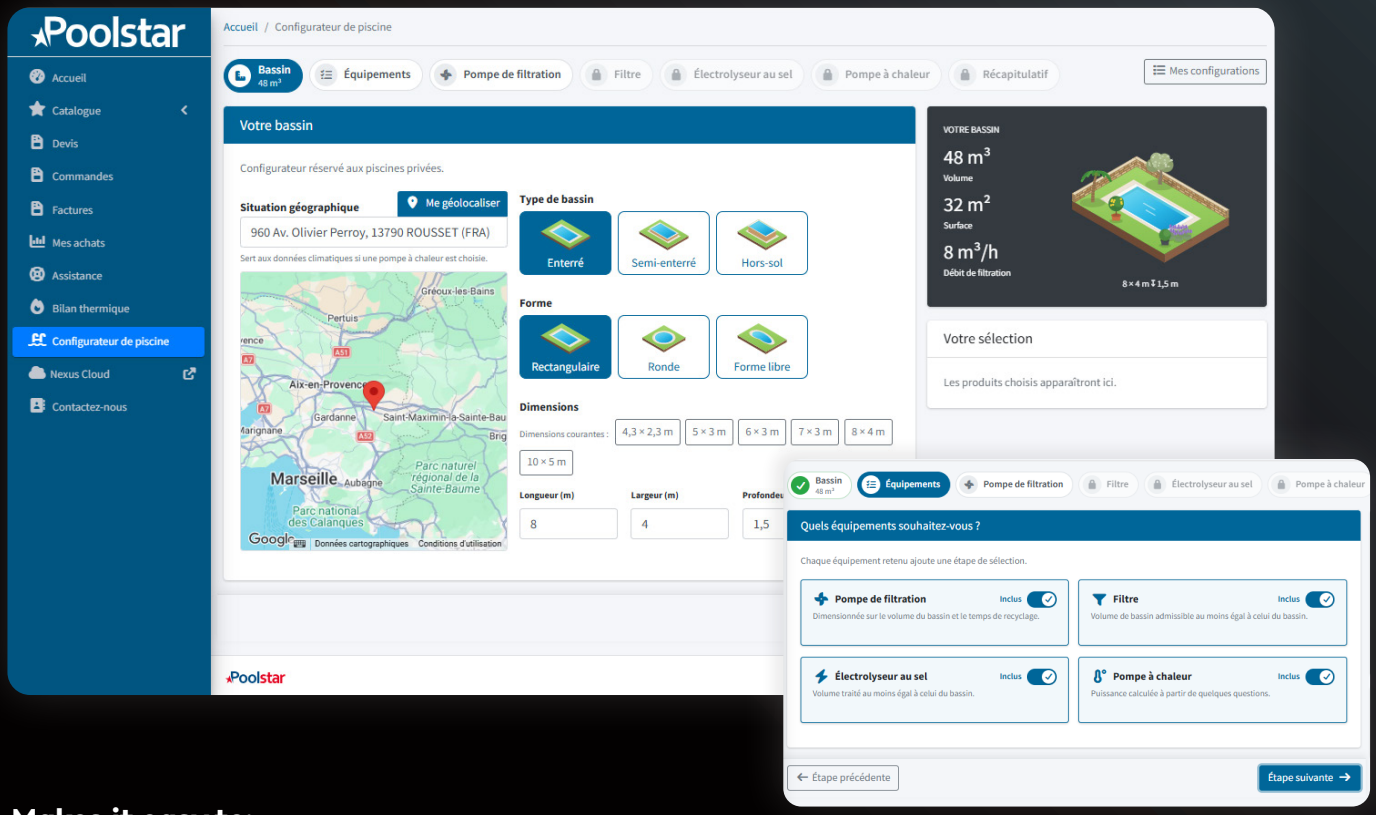

Makes it easy to:

Size.
Volume, flow rate and power.

Select.
The best-matched model.

Check.
All compatibilities, energy assessment included.

Order.
Net prices and live stock.

7 GUIDED STEPS. FROM POOL TO BASKET.

1 Pool
2 Equipment
3 Pump
4 Filter
5 Salt chlorinator
6 Heat pump
7 Summary

Technical room packs. Turnkey.

3 PACKS. READY TO ORDER.

The pool volume

PACK

30 m³



Complete technical room

PACK

60 m³



Complete technical room

PACK

90 m³



Complete technical room

Your choice

The heat pump



Horizontal air discharge



Vertical air discharge

The filter



Sand filter



Cartridge filter

IT'S READY.

The whole technical room, in a single order.

- ✓ **Pump**
- ✓ **Filter**
- ✓ **Salt chlorinator**
- ✓ **Heat pump**

POOLEX

HEATING & COOLING

From 3 to 800 kW, proven heat pump expertise, from mini pools to water parks.




POOLEX
POOLEX
POOLEX

20 years of expertise.
Uncompromising standards.

At Poolex, every innovation is built on a demand for performance. Our solutions combine advanced technologies, energy efficiency and durability to meet the highest expectations. Equipment designed to give your customers reliability, control and durability, day after day.



EN 17645

SCOP A across the range

SCOP (Seasonal Coefficient of Performance) measures a heat pump's energy efficiency over a whole season, from 1 May to 30 September.

More representative than COP, which is calculated at a given moment, it takes into account temperature variations and operating cycles, based on three reference points: 7 °C, 15 °C and 26 °C.

Across the Poolex range, all Full Inverter models achieve an A-rated SCOP, combining high performance with controlled consumption throughout the season.

First-class quality

From design to delivery, every Poolex heat pump is tested and inspected to first-class standards. The result: **a return rate below 2%** on our pro range in 2025 and 2026. Reliability we **guarantee for 5 years.**

< 2 %
return rate*

5 YEARS
warranty

*pro heat pump range 2025-2026

BY EUROVENT CERTITA CERTIFICATION
NF

NF heat pump certification guarantees the unit's energy performance and compliance with efficiency thresholds and noise levels, with annual renewal. NF-certified heat pumps offer a higher level of quality.

Ever more **innovative air discharge designs**

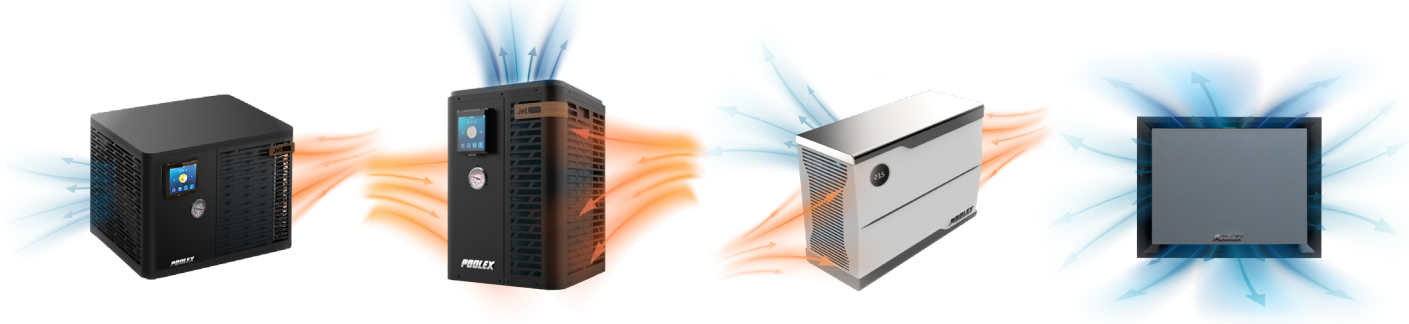

SIDE VERTICAL REAR 360°

R290.
A mastered evolution.

Since March 2024, the European **F-Gas III** regulation has governed the use of refrigerants. From 2027, it steers new heat pumps towards refrigerants with a **GWP below 150**. Poolex is ahead of the curve: from 2027, **all its new heat pumps use R290**, a natural refrigerant with superior thermal performance and near-zero climate impact.

R410A
GWP 2088
1 kg leaked = 2 tonnes of CO_2

R32
GWP 675
1 kg leaked = 675 kg of CO_2

R290
GWP 0.02
1 kg leaked = 0.02 kg of CO_2

Tangible benefits

A natural refrigerant
Derived from propane, with a GWP of 0.02 (GWP: global warming potential, 1 kg of refrigerant released): it does not contribute to global warming.

More efficient
More efficient at low temperatures, it offers **high efficiency** (optimised SCOP). A longer heating season and optimised energy consumption.

Poolex's uncompromising commitment

- a complete range from 3 to 100 kW
- solutions for spas, mini pools, residential and commercial
- sales tools and technical documentation
- sales support to make the transition a success

R290 *Poolex is making R290 the new standard for pool heat pumps: more responsible, more efficient and ready to meet every need.*

and supports the transition

You keep the option of R32

Because a successful transition is built over time, Poolex is maintaining its R32 range alongside the roll-out of R290.

Our partners therefore benefit from a continuous offer and a gradual transition to the new standard.





THE PRO OFFER

HEAT PUMPS

HEATING AND COOLING EXPERTISE
FROM 3 KW TO 800 KW

	JET CITY		JET PRO	
Air discharge	Horizontal	Vertical	Horizontal	Vertical
Pool type	In-ground		In-ground	
Pool volume	< 25 m³		< 130 m³	
SCOP	A		A	
Full Inverter technology	✓		✓	
EVI technology	-		-	
Reversible	✓		✓	
Wi-Fi connection *Remote control*	✓		✓	
Nexus Ready	✓		✓	
OTA (Over-the-air) *Remote software updates*	✓		✓	
Smart Grid compatible	-		✓	
Operates down to*	-15 °C		-7 °C	
Silent mode	✓		✓	
Automatic defrosting	✓		✓	
Gas type	R290		R290	
Warranty	5 years		5 years	

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.



REMEMBER TO CARRY OUT A HEAT LOSS ASSESSMENT

The water volumes stated for our heat pumps are maximum estimates under optimal conditions. A precise heat loss assessment is essential to determine the right power for each installation.



AIRLINE 360	AIRLINE 360 EVI	MEGALINE FI
360°	360°	
In-ground	In-ground	Commercial
< 125 m³	< 130 m³	Contact our experts for a detailed study
A	A	A
✓	✓	✓
-	✓	-
✓	✓	✓
✓	✓	✓
✓	✓	✓
✓	✓	-
✓	✓	-
-15 °C	-25 °C	-20 °C
-	✓	✓
✓	✓	✓
R290	R290	R290
5 years	5 years	5 years

NEW

Jet CITY R290

Exclusive retail

THE SUPERCHARGED LITTLE ONE QUEEN OF MINI POOLS

NOW ALSO AVAILABLE IN VERTICAL!

Vertical air discharge

Horizontal air discharge



Performance
Class A | SCOP > 7

Nexus Ready
App, Cloud & OTA

Mini format
Premium look

Remote
touchscreen

Quiet
< 30 dB at 10 m

Jet City is the ultra-efficient mini heat pump dedicated to small pools. Designed for pools **up to 25 m³**, it provides heating and cooling with the performance of larger models, while remaining quiet and compact.

This new version now uses **R290** refrigerant gas and is available with **vertical or horizontal air discharge**, to adapt easily to any installation configuration.

WARRANTIES

- **5 years**: all parts
- **7 years**: compressor
- **15 years**: titanium coil



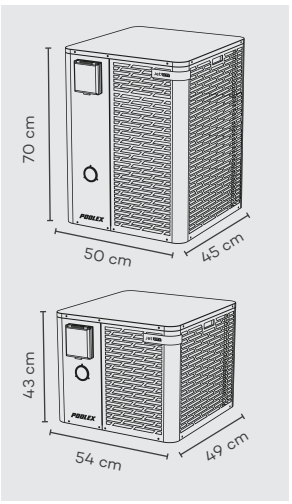

		Horizontal air discharge	Vertical air discharge
Model		400	400
Reference		PC-JETC2-250H	PC-JETC2-250V
Max pool volume		25 m³	25 m³
SCOP · Class A		7.1	7.1
Air 26 °C Water 26 °C	Output power (kW)	5	5
	Power input (kW)	0.83	0.83
	COP	6.0	6.0
Air 15 °C Water 26 °C	Output power (kW)	4	4
	Power input (kW)	0.89	0.80
	COP	4.5	5.0
Air 35 °C Water 28 °C	Output power (kW)	2.5	2.5
	Power input (kW)	1.32	1.32
	EER	1.9	1.9
Power supply		220-240 V ~ 50/60 Hz	
Heating temperature setting range		15 ~ 43 °C	
Cooling temperature setting range		5 ~ 43 °C	
Operating range (ambient air)		–7 ~ 43 °C*	
Max power (kW)		2.1	2.1
Flow rate (m³/h)		2.15	2.15
Circuit breaker		10A	
Cable cross-section (at 10 m)		R2V 3 × 2.5 mm²	
Refrigerant		R290	
Product dimensions (mm)		540 × 490 × 430	700 x 500 x 450
Packaging dimensions (mm)		572 x 590 x 480	800 x 600 x 550
Net / gross weight (kg)		42 / 50	42 / 50
Noise at 1 m (dB(A))		50	50
Noise at 10 m (dB(A))		35	35
Compressor		GMCC – Rotary	
Heat exchanger		Twisted Tech® Titanium	
Functions		Heating · Cooling · Automatic	
Pressure drop (mWC)		0.1	0.1
Accessories included		Ø 50 mm 1"1/2 PVC connectors, 2 hose clamps, condensate drain hose, winter cover	

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

NEW

Jet PRO

R290

Exclusive retail

EVEN MORE EFFICIENT,
EVEN MORE DURABLE

THE NEW MARKET BENCHMARK

Vertical air discharge

Horizontal air discharge



Performance
Class A | SCOP > 7

Nexus Ready
App, Cloud & OTA

Smart control
panel

Smart
Grid Ready

The Jet Pro 2 takes the performance that made the range a success even further. It combines **Full Inverter** technology, **R290** refrigerant and premium components to deliver a **high level of performance, quietness and durability**.

Available with **vertical or horizontal air discharge**, it adapts to different installation constraints and features a new, intuitive control interface.

WARRANTIES

- **5 years**: all parts
- **7 years**: compressor
- **15 years**: titanium coil

INNOVATIVE CONTROL PANEL

4-inch TFT touchscreen with a new interface that makes controlling the heat pump a more intuitive, personalised experience.

Built-in weather function to fine-tune energy consumption.





Recessed design protects the display and blends elegantly into the design.



SMART GRID READY

Compatible with smart energy management systems, the Jet Pro 2 can **adapt its operation to the signals it receives** to favour the most advantageous periods and optimise its energy consumption.

Modbus

AN ULTRA-PREMIUM DESIGN

VERTICAL AND HORIZONTAL AIR DISCHARGE:
To suit all types of installation.





Discreet front grille
A clean design that optimises airflow and blends elegantly into the garden.

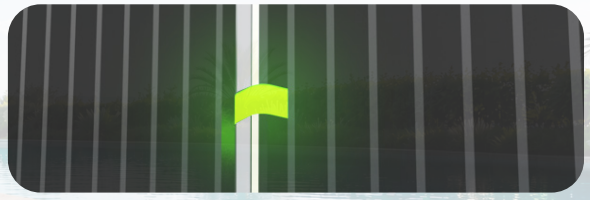

Elegant LED strip
A modern, effective light indicator.

Subject to NF certification



Jet PRO

Horizontal air discharge

		Horizontal air discharge							
Model		400	500	650	800	1000	1000 Tri	1300	1300 Tri
Reference		PC-JET2-400	PC-JET2-500	PC-JET2-650	PC-JET2-800	PC-JET2-1000	PC-JET2-1000T	PC-JET2-1300	PC-JET2-1300T
Max pool volume		40 m³	50 m³	65 m³	80 m³	100 m³	100 m³	130 m³	130 m³
SCOP · Class A		7.45	7.47	8.34	7.90	8.05	8.04	8.26	7.80
Air 26 °C Water 26 °C	Output power (kW)	1.82 ~ 8.73	1.91 ~ 10.91	2.39 ~ 12.63	3.74 ~ 15.40	5.07 ~ 21.19	6.04 ~ 21.34	7.85 ~ 28.47	7.93 ~ 28.44
	Power input (kW)	0.15 ~ 1.36	0.15 ~ 1.78	0.17 ~ 2.15	0.21 ~ 2.55	0.48 ~ 3.38	0.49 ~ 3.37	0.63 ~ 4.69	0.63 ~ 4.70
	COP	12.13 ~ 6.42	12.73 ~ 6.13	14.06 ~ 5.83	17.81 ~ 6.04	10.56 ~ 6.27	12.33 ~ 6.33	12.46 ~ 6.07	12.59 ~ 6.05
Air 15 °C Water 26 °C	Output power (kW)	1.40 ~ 6.05	1.55 ~ 7.82	1.72 ~ 9.66	2.98 ~ 11.70	4.06 ~ 15.93	4.60 ~ 15.98	6.31 ~ 21.96	6.14 ~ 21.83
	Power input (kW)	0.20 ~ 1.17	0.21 ~ 1.59	0.22 ~ 2.03	0.29 ~ 2.41	0.56 ~ 3.10	0.97~3.07	0.77 ~ 4.44	0.80 ~ 4.50
	COP	7.00 ~ 5.16	7.38 ~ 4.92	7.82 ~ 4.76	10.28 ~ 4.85	7.25 ~ 5.14	7.54 ~ 5.21	8.19 ~ 4.95	7.68 ~ 4.85
Air 35 °C Water 28 °C	Output power (kW)	3.34 ~ 5.32	4.06 ~ 6.0	5.02 ~ 6.63	4.03 ~ 7.49	6.89 ~ 9.93	6.77 ~ 9.67	9.45 ~ 16.50	9.35 ~ 15.78
	Power input (kW)	0.53 ~ 1.16	0.68 ~ 1.17	0.83 ~ 1.23	0.86 ~ 2.62	1.53 ~ 3.15	1.54 ~ 3.14	1.68 ~ 4.68	1.75 ~ 4.67
	EER	4.59 ~ 6.30	5.13 ~ 5.98	5.39 ~ 6.05	2.86 ~ 4.69	3.15 ~ 4.50	3.08 ~ 4.39	3.53 ~ 5.63	3.38 ~ 5.34
Power supply		220-240 V ~ 50/60 Hz					Three-phase 380-415 V / 3N / 50 / 60 Hz	220-240V ~ 50/60Hz	Three-phase 380-415 V / 3N / 50 / 60 Hz
Heating temperature setting range		7 ~ 40 °C							
Cooling temperature setting range		7 ~ 35 °C							
Operating range (ambient air)		–20 ~ 45 °C							
Max power (kW)		2.0	2.3	2.6	3.5	4.6	5.0	6.5	6.86
Flow rate (m³/h)		2.6	3.6	4.2	5.1	7.05	7.1	9.2	9.1
Circuit breaker		16 A	16 A	20 A	20 A	32 A	16 A	40 A	16 A
Cable cross-section (at 10 m)		R2V 3 x 2.5 mm²			R2V 3 x 6 mm²		R2V 5 x 2.5 mm²	R2V 3 x 10 mm²	R2V 5 x 2.5 mm²
Refrigerant		R290							
Product dimensions (mm)		849 × 394 × 655		954 × 394 × 755		1036 × 394 × 955		1288 × 479 × 955	
Packaging dimensions (mm)		895 × 450 × 815		1000 × 450 × 915		1082 × 449 × 1106		1335 × 547 × 1106	
Net / gross weight (kg)		56	58	60	62	64	66	68	70
Noise at 1 m (dB(A))		41 ~ 51	46.1 ~ 53.6	47 ~ 55.8	47.7 ~ 56.6	44.5 ~ 59		43.9 ~ 56.3	
Noise at 10 m (dB(A))		21 ~ 31	24.2 ~ 33.2	27.2 ~ 35.2	28.2 ~ 36.8	22.2 ~ 38.8		23.2 ~ 36.2	
Compressor		GMCC – Rotary							
Heat exchanger		Twisted Tech® Titanium							
Functions		Heating · Cooling · Automatic							
Pressure drop (mWC)		0.2	0.3	0.4	0.5	0.9		1.2	
Accessories included		PVC connectors · Anti-vibration feet kit · Condensate drain hose							

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

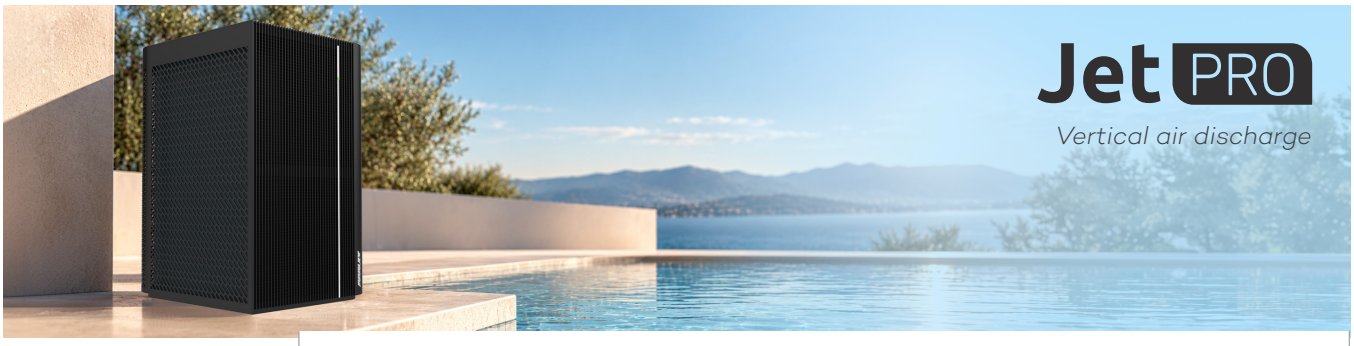

		Vertical air discharge							
Model		400	500	650	800	1000	1000 Tri	1300	1300 Tri
Reference		PC-JET2V-400	PC-JET2V-500	PC-JET2V-650	PC-JET2V-800	PC-JET2V-1000	PC-JET2V-1000T	PC-JET2V-1300	PC-JET2V-1300T
Max pool volume		40 m³	50 m³	65 m³	80 m³	100 m³	100 m³	130 m³	130 m³
SCOP · Class A		7.27	7.23	7.26	7.78	7.67	7.59	7.90	8.18
Air 26 °C Water 26 °C	Output power (kW)	1.71 ~ 8.86	2.78 ~ 10.72	2.64 ~ 13.10	3.00 ~ 15.01	4.72 ~ 19.24	4.70 ~ 19.48	6.45 ~ 25.30	6.18 ~ 25.35
	Power input (kW)	0.10 ~ 1.47	0.17 ~ 1.76	0.17 ~ 2.22	0.17 ~ 2.56	0.32 ~ 3.58	0.35 ~ 3.36	0.48 ~ 4.33	0.50 ~ 4.32
	COP	16.39 ~ 6.01	16.35 ~ 6.08	15.53 ~ 5.90	17.65 ~ 5.87	14.75 ~ 5.38	13.43 ~ 5.80	13.44 ~ 5.84	12.36 ~ 5.87
Air 15 °C Water 26 °C	Output power (kW)	1.37 ~ 5.92	1.98 ~ 7.73	1.80 ~ 9.90	2.14 ~ 11.41	3.46 ~ 14.91	3.38 ~ 14.82	4.65 ~ 19.27	4.75 ~ 19.80
	Power input (kW)	0.17 ~ 1.22	0.23 ~ 1.71	0.22 ~ 2.08	0.24 ~ 2.40	0.40 ~ 3.26	0.44 ~ 3.13	0.60 ~ 4.09	0.89~4.09
	COP	8.06 ~ 4.87	8.61 ~ 4.84	8.18 ~ 4.76	8.92 ~ 4.75	8.67 ~ 4.67	7.68 ~ 4.73	7.75 ~ 4.71	7.78 ~ 4.79
Air 35 °C Water 28 °C	Output power (kW)	2.89 ~ 4.67	3.84 ~ 4.97	3.99 ~ 6.27	4.55 ~ 7.58	4.74 ~ 7.54	4.66 ~ 7.71	7.31 ~ 10.54	7.19 ~ 10.25
	Power input (kW)	0.56 ~ 1.36	0.93 ~ 1.38	0.80 ~ 1.80	0.90 ~ 2.30	1.05 ~ 2.63	1.03 ~ 2.58	1.53 ~ 2.88	1.54 ~ 2.90
	EER	3.43 ~ 5.16	3.6 ~ 4.13	3.48 ~ 4.99	3.30 ~ 5.06	2.87 ~ 4.51	2.99 ~ 4.52	3.66 ~ 4.78	3.53 ~ 4.67
Power supply		220-240 V ~ 50/60 Hz					Three-phase 380-415 V / 3N / 50 / 60 Hz	220-240V ~ 50/60Hz	Three-phase 380-415 V / 3N / 50 / 60 Hz
Heating temperature setting range		7 ~ 40 °C							
Cooling temperature setting range		7 ~ 35 °C							
Operating range (ambient air)		–20 ~ 45 °C							
Max power (kW)		1.95	2.4	2.6	3.3	4.7	4.6	5.7	5.3
Flow rate (m³/h)		2.65	3.75	4.3	5.3	6.3	6.3	8.2	8.4
Circuit breaker		16 A	16 A	16 A	20 A	32 A	16 A	40 A	16 A
Cable cross-section (at 10 m)		R2V 3 x 2.5 mm²			R2V 3 x 6 mm²		R2V 5 x 2.5 mm²	R2V 3 x 10 mm²	R2V 5 x 2.5 mm²
Refrigerant		R290							
Product dimensions (mm)		546 x 507 x 777		702 x 699 x 777				771 x 698 x 984	
Packaging dimensions (mm)		628 × 554 × 911		790 x 752 x 911		1082 × 449 × 1106		1335 × 547 × 1106	
Net / gross weight (kg)		56	58	60	62	64	66	68	70
Noise at 1 m (dB(A))		41 ~ 50	43 ~ 52	43.1 ~ 53.9	42.8 ~ 54.8	43 ~ 55.8		45 ~ 59.2	
Noise at 10 m (dB(A))		21 ~ 28	23 ~ 30	24 ~ 28	24 ~ 35	25 ~ 36		25 ~ 39	
Compressor		GMCC – Rotary							
Heat exchanger		Twisted Tech® Titanium							
Functions		Heating · Cooling · Automatic							
Pressure drop (mWC)		0.1	0.3	0.4	0.6	0.9		1.2	
Accessories included		PVC connectors · Anti-vibration feet kit · Condensate drain hose							

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

Airline 360

R290

THE REVOLUTION TOWARDS A MORE SUSTAINABLE POOL



Performance Class A | SCOP > 7

Full Inverter technology

Innovative 360° air discharge

Nexus Ready App, Cloud & OTA

Premium design

The Airline 360 features 360° air discharge, an innovative fan system in a clean design. Thanks to **its remarkable thermodynamic properties,** R290 ensures optimal heat transfer and **stable performance even at low temperatures.**

Its high energy efficiency makes it an effective, **durable and eco-efficient** refrigeration solution, meeting the market's most demanding standards.

WARRANTIES

- **5 years**: all parts
- **7 years**: compressor
- **15 years**: titanium coil

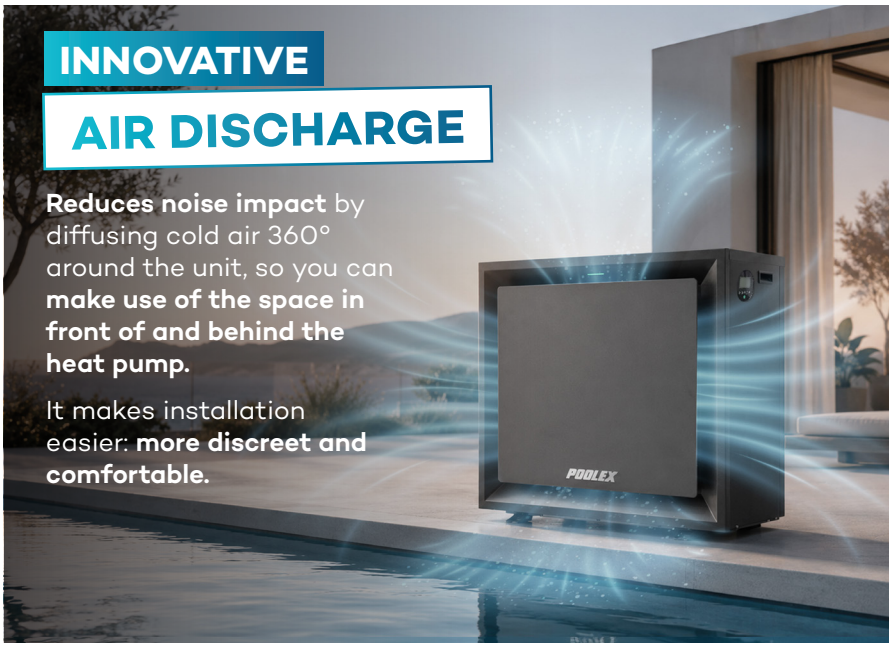

PREMIUM DESIGN

A most elegant look thanks **to the powder-coated aluminium front panel.**



Model		6	8	10	15	20	15 TRI	20 TRI
Reference		PC-AIR060	PC-AIR080	PC-AIR100	PC-AIR150	PC-AIR200	PC-AIR150T	PC-AIR200T
Max pool volume		40 m³	50 m³	65 m³	100 m³	130 m³	100 m³	130 m³
SCOP · Class A		**7.25**	**7.36**	**7.70**	**7.86**	**7.95**	**7.65**	**7.53**
Air 26 °C Water 26 °C	Output power (kW)	2.67 ~ 8.43	3.47 ~ 10.33	4.18 ~ 13.37	6.22 ~ 19.28	8.80 ~ 26.79	6.44 ~ 19.34	8.50 ~ 26.28
	Power input (kW)	0.22 ~ 1.27	0.31 ~ 1.53	0.35 ~ 2.21	0.49 ~ 3.02	0.70 ~ 4.30	0.51 ~ 3.02	0.72 ~ 4.35
	COP	6.64 ~ 12.14	6.75 ~ 11.19	6.05 ~ 11.94	6.38 ~ 12.69	6.23 ~ 12.57	6.40 ~ 12.63	6.04 ~ 11.80
Air 15 °C Water 26 °C	Output power (kW)	2.01 ~ 6.28	2.51 ~ 7.87	3.35 ~ 10.36	4.41 ~ 14.91	6.90 ~ 20.58	5.00 ~ 14.88	6.70 ~ 19.85
	Power input (kW)	0.27 ~ 1.25	0.35 ~ 1.57	0.47 ~ 2.12	0.61 ~ 2.90	0.86 ~ 4.08	0.61 ~ 2.91	0.87 ~ 4.13
	COP	5.01 ~ 7.44	5.01 ~ 7.17	4.89 ~ 7.13	5.14 ~ 7.23	5.04 ~ 8.02	5.11 ~ 8.20	4.81 ~ 7.70
Air 35 °C Water 28 °C	Output power (kW)	2.79 ~ 5.14	3.84 ~ 5.29	3.72 ~ 6.35	5.53 ~ 6.69	8.47 ~ 14.15	5.53 ~ 7.75	8.50 ~ 13.10
	Power input (kW)	0.55 ~ 1.26	0.80 ~ 1.33	0.97 ~ 2.09	1.36 ~ 2.00	2.21 ~ 3.86	1.36 ~ 3.38	2.21 ~ 3.76
	EER	4.08 ~ 5.07	4.00 ~ 4.80	3.04 ~ 3.84	3.35 ~ 4.07	3.67 ~ 3.83	2.29 ~ 4.07	3.48 ~ 3.85
Power supply		Single-phase 220-240 V ~ 50/60 Hz					Three-phase 380-415 V / 3N / 50/60 Hz	
Heating temperature setting range		15 ~ 40 °C						
Cooling temperature setting range		10 ~ 35 °C						
Operating range (ambient air)		−15 ~ 45 °C*						
Max power (kW)		1.9	2.1	3.1	4.3	5.7	4.3	5.6
Flow rate (m³/h)		2.7	3.3	4	6.3	8.6	6.3	8.8
Circuit breaker		16A	16A	20A	32A	32A	16A	20A
Cable cross-section (at 10 m)		R2V 3 × 2.5 mm²		R2V 3 × 8.5 mm²	R2V 3 × 6.5 mm²	R2V 3 × 6 mm²	R2V 5 × 2.5 mm²	
Refrigerant		R290						
Product dimensions (mm)		849 × 405 × 655	849 × 405 × 655	954 × 405 × 755	1036 × 405 × 955	1288 × 490 × 955	1036 × 405 × 955	1288 × 490 × 955
Packaging dimensions (mm)		895 × 449 × 688	895 × 449 × 688	1000 × 449 × 788	1082 × 449 × 985	1335 × 547 × 990	1082 × 449 × 985	1335 × 547 × 990
Net / gross weight (kg)		59 / 70	64 / 75	82 / 95	108 / 123	131.6 / 153	108 / 123	133.8 / 153
Noise at 1 m (dB(A))		39.32 ~ 51.15	41.0 ~ 52.0	44.7 ~ 53.6	42.10 ~ 55.2	43 ~ 56	42.10 ~ 55.2	43 ~ 56
Noise at 10 m (dB(A))		19.32 ~ 31.15	22.40 ~ 32.05	24.7 ~ 33.6	22.10 ~ 35.2	23 ~ 36	22.10 ~ 35.2	23 ~ 36
Compressor		GMCC						
Heat exchanger		Twisted Tech® Titanium						
Functions		Heating · Cooling · Automatic						
Pressure drop (mWC)		4.7	7.6	10	23.7	32.3	23.7	32.3
Accessories included		PVC connectors, anti-vibration feet kit, condensate drain hose						

Specifications are subject to change; please refer to the latest product data sheet.

NEW

Airline 360 EVI

ABSOLUTE POWER, EXTREME TEMPERATURES!

SUITABLE FOR ALL CLIMATES

R290



Performance
Class A | SCOP > 7

EVI
-25°C
Extreme conditions
COP 2 at -10 °C

Innovative
360° air discharge

Nexus Ready
App, Cloud & OTA

Smart
Grid Ready

The Airline 360 EVI features 360° air discharge, an innovative fan system in a clean design. **Combining R290 gas with EVI technology,** it delivers exceptional performance even in extreme climates. An eco-responsible heat pump designed for Nordic and mountain climates.

WARRANTIES

- **5 years**: all parts
- **7 years**: compressor
- **15 years**: titanium coil

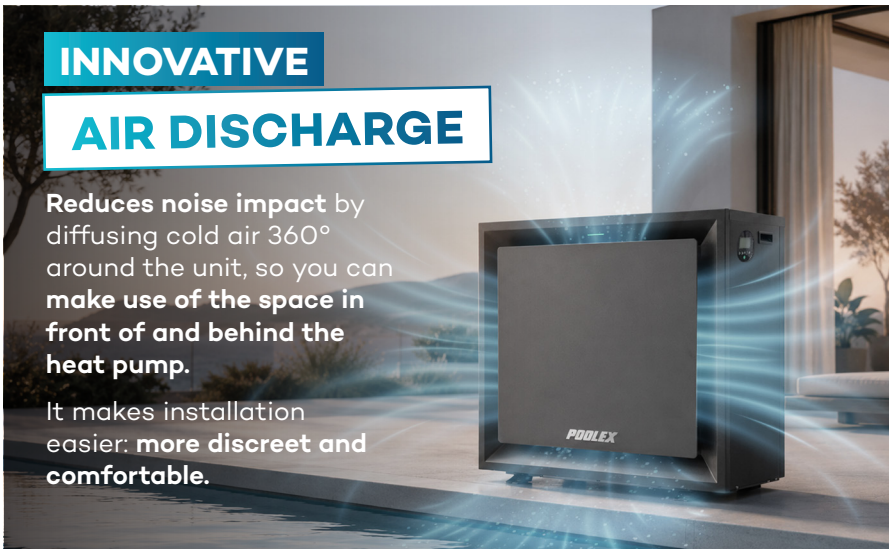



Model		500	650	1000	1000 TRI	1300	1300 TRI
Reference		PC-AIR2R-500	PC-AIR2R-650	PC-AIR2R-1000	PC-AIR2R-1000T	PC-AIR2R-1300	PC-AIR2R-1300T
Max pool volume		50 m³	65 m³	100 m³	100 m³	130 M³	130 m³
SCOP · Class A		**7.45**	**7.26**	**7.41**	**7.33**	**7.97**	**8.28**
Air 26 °C Water 26 °C	Output power (kW)	2.01 ~ 9.9	2.85 ~ 13.08	4.00 ~ 19.75	4.17 ~ 20.32	4.84 ~ 26.0	5.12 ~ 26.0
	Power input (kW)	0.15 ~ 1.52	0.20 ~ 2.18	0.26 ~ 3.09	0.24 ~ 3.28	0.31 ~ 4.06	0.30 ~ 4.06
	COP	13.40 ~ 6.51	14.25 ~ 6.00	15.38 ~ 6.39	17.38 ~ 6.20	15.61 ~ 6.40	17.07 ~ 6.40
Air 15 °C Water 26 °C	Output power (kW)	2.0 ~ 8.0	2.78 ~ 10.19	3.75 ~ 15.09	4.08 ~ 15.96	4.41 ~ 20.01	5.0 ~ 20.01
	Power input (kW)	0.25 ~ 1.63	0.34 ~ 2.09	0.45 ~ 3.05	0.44 ~ 3.22	0.51 ~ 4.08	0.56 ~ 4.08
	COP	8.0 ~ 4.91	8.18 ~ 4.88	8.33 ~ 4.95	9.27 ~ 4.96	8.65 ~ 4.90	8.93 ~ 4.90
Air −10 °C Water 26 °C	Output power (kW)	5.21	7.56	11.17	10.52	13.31	13.99
	Power input (kW)	2.48	2.84	4.35	3.95	5.55	5.24
	COP	2.1	2.66	2.57	2.66	2.4	2.67
Air 35 °C Water 28 °C	Output power (kW)	3.61 ~ 5.51	4.04 ~ 6.34	6.38 ~ 8.77	6.38 ~ 8.20	11.08 ~ 14.0	9.87 ~ 14.0
	Power input (kW)	0.87 ~ 1.53	1.34 ~ 2.87	1.77 ~ 2.92	1.72 ~ 2.49	2.22 ~ 3.68	2.23 ~ 3.68
	EER	4.15 ~ 3.60	3.01 ~ 2.21	3.60 ~ 3.0	3.71 ~ 3.29	4.99 ~ 3.80	4.43 ~ 3.80
Power supply		Single-phase 220-240 V ~ 50/60 Hz			Three-phase 380-415 V / 3N / 50/60 Hz	Single-phase 220-240 V ~ 50/60 Hz	Three-phase 380-415 V / 3N / 50/60 Hz
Heating temperature setting range		7 ~ 40 °C					
Cooling temperature setting range		7 ~ 35 °C					
Operating range (ambient air)		−25 ~ 45 °C					
Max power (kW)		2.23	3.7	5.5	5.7	6.6	6.7
Flow rate (m³/h)		3.4	4.2	6.4	6.3	8.6	8.6
Circuit breaker		16A	20A	32A	16A	40A	16A
Cable cross-section (at 10 m)		R2V 3 × 2.5 mm²		R2V 3 × 6 mm²	R2V 3 × 2.5 mm²	R2V 3 × 6 mm²	R2V 3 × 2.5 mm²
Refrigerant		R290					
Product dimensions (mm)		849 × 405 × 655	954 × 405 × 755	1036 × 405 × 955		1288 × 490 × 955	
Packaging dimensions (mm)		895 × 449 × 688	1000 × 449 × 788	1082 × 449 × 985		1335 × 547 × 990	
Net / gross weight (kg)		72 / 82	86 / 98	110 / 124	114 / 128	137 / 155	138 / 156
Noise at 1 m (dB(A))		42 ~ 51.2	44.2 ~ 52.4	45 ~ 55	45 ~ 55	46 ~ 56.3	46 ~ 56.3
Noise at 10 m (dB(A))		25 ~ 34.2	26.2 ~ 35.8	27 ~ 38		29.2 ~ 39.2	
Compressor		GMCC · Rotary · Inverter · EVI					
Heat exchanger		Twisted Tech® Titanium					
Functions		Heating · Cooling · Automatic					
Pressure drop (mWC)		0.2	0.4	0.8		1.1	
Accessories included		PVC connectors, anti-vibration feet kit, condensate drain hose					

Specifications are subject to change; please refer to the latest product data sheet.

NEW

EXCLUDING PRO SELECTION

Megaline Fi

ABSOLUTE POWER FOR EXCEPTIONAL POOLS



Performance Class A | SCOP > 7

FULL INVERTER

Nexus Ready App & Cloud

Designed for intensive use

Can be combined up to 800 kW

Three-phase connection

Now **available in R290**, the Megaline Fi supports the transition to the **pool of tomorrow**. Already recognised for its performance on **XXL pools**, it now uses a refrigerant with **low environmental impact**, combining **performance**, **energy efficiency** and **a reduced carbon footprint**. Designed for **local authorities, hotels, campsites and aquatic centres**, it features Full Inverter technology and a robust stainless steel construction, guaranteeing reliability in the most demanding environments.

WARRANTIES

- **5 years**: all parts
- **7 years**: compressor
- **15 years**: titanium coil

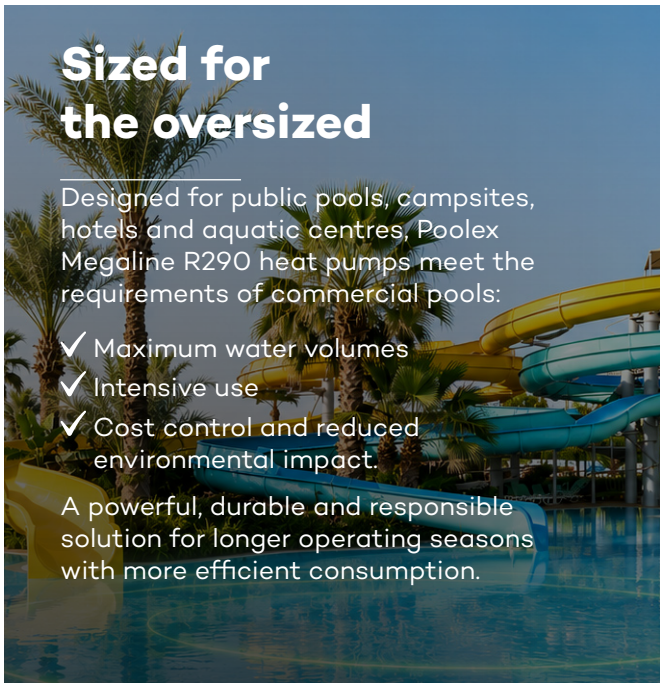

Sized for the oversized

Designed for public pools, campsites, hotels and aquatic centres, Poolex Megaline R290 heat pumps meet the requirements of commercial pools:

- ✓ Maximum water volumes
- ✓ Intensive use
- ✓ Cost control and reduced environmental impact.

A powerful, durable and responsible solution for longer operating seasons with more efficient consumption.

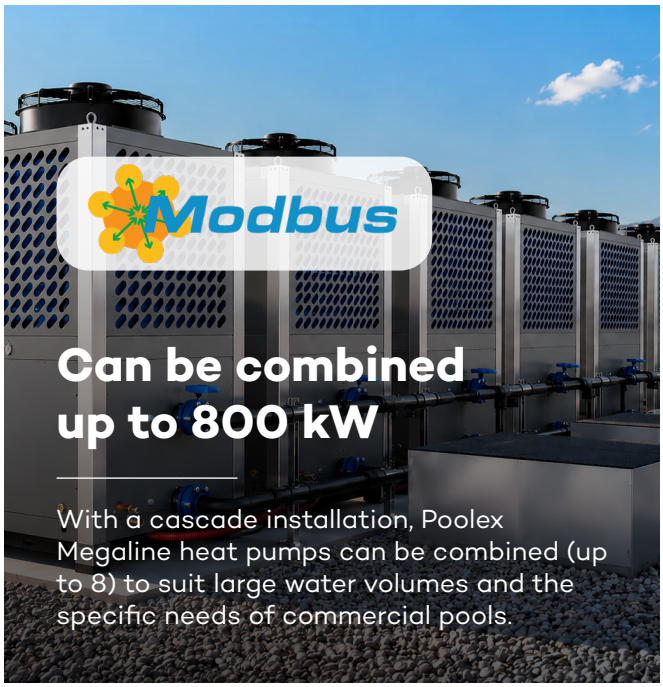

Can be combined up to 800 kW

With a cascade installation, Poolex Megaline heat pumps can be combined (up to 8) to suit large water volumes and the specific needs of commercial pools.

Model		35	50	65	95
Max pool volume		Contact our experts for a detailed study			
SCOP · Class A		**8.07**	**7.9**	**7.18**	**7.22**
Air 26 °C Water 26 °C	Output power (kW)	12.2 ~ 45.09	11.8 ~ 62.77	24.11 ~ 84.74	36.8 ~ 120.80
	Power input (kW)	0.95 ~ 7.33	0.93 ~ 10.48	2.17 ~ 14.77	3.35 ~ 21.19
	COP	12.84 ~ 6.15	12.69 ~ 5.99	11.11 ~ 5.74	10.98 ~ 5.70
Air 15 °C Water 26 °C	Output power (kW)	10.58 ~ 34.69	10.18 ~ 48.08	19.97 ~ 65.06	26.8 ~ 93.0
	Power input (kW)	1.34 ~ 7.06	1.41 ~ 9.94	2.99 ~ 14.01	4.12 ~ 20.07
	COP	7.90 ~ 4.91	7.22 ~ 4.84	6.68 ~ 4.64	6.50 ~ 4.50
Air −10 °C Water 26 °C	Output power (kW)	16.50 ~ 20.80	19.00 ~ 27.42	31.0 ~ 48.33	35.22 ~ 63.49
	Power input (kW)	3.31 ~ 5.09	2.68 ~ 5.12	6.34 ~ 15.98	7.49 ~ 21.16
	COP	4.98 ~ 4.09	7.09 ~ 5.36	4.89 ~ 3.02	4.70 ~ 3.0
Power supply		Three-phase 380-415 V / 3N / 50/60 Hz			
Heating temperature setting range		7 ~ 40 °C			
Cooling temperature setting range		7 ~ 35 °C			
Operating range (ambient air)		−20 ~ 45 °C			
Max power (kW)		9.52	17.2	20	32
Max current (A)		16	27	32	50
Flow rate (m³/h)		35	40	40	65
Circuit breaker		14A	-	-	-
Cable cross-section (at 10 m)		RO2V 5 × 4 mm²	RO2V 5 × 6 mm²	RO2V 5 × 10 mm²	RO2V 5 × 16 mm²
Refrigerant		R290			
Refrigerant charge (g)		2 000	4 100	2 × 2 800	2 × 3 250
Product dimensions (mm)		984 × 909 × 1084	1023 × 1023 × 1089	1252 × 1075 × 2518	2180 × 1100 × 2630
Packaging dimensions (mm)		1115 × 987 × 1245	-	-	-
Net / gross weight (kg)		-	-	-	-
Noise at 1 m (dB(A))		51 - 64	49 - 66	52 - 68	53 - 70
Noise at 10 m (dB(A))		34 - 40	42 - 50	45 - 52	46 - 53
Compressor		Mitsubishi · Rotary · Inverter			
Heat exchanger		Twisted Tech® Titanium			
Functions		Heating · Cooling			
Pressure drop (mWC)		0.5	0.6	4.2	4.8
Safety		Built-in refrigerant leak detection module			
Connectivity		Modbus · Cascade installation up to 8 units · Nexus Ready			

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

Our R32 heat pumps are still available

To ensure continuity of our range and support the transition to R290, we have secured a large stock of our R32 heat pumps.



JET CITY

THE SUPERCHARGED LITTLE ONE

4 & 5.5 kW (at 15/26) | Up to 40 m³

EVI -25°C · FULL INVERTER · NEW R32

WARRANTY 5 YEARS

For info, scan



JET PRO

THE PERFECT COMBINATION OF PERFORMANCE AND DURABILITY

7.5 | 9.5 | 12.5 | 15 | 15 Tri | 18 | 18 Tri kW (at 15/26)

Up to 135 m³

FULL INVERTER · NEW R32 · NF

WARRANTY 5 YEARS

For info, scan



JET MAX

ABSOLUTE POWER FOR XL POOLS

22.5 | 22.5 Tri kW | 27 | 27 Tri (at 15/26)

Up to 135 m³

FULL INVERTER · NEW R32

WARRANTY 5 YEARS

For info, scan



REMEMBER TO CARRY OUT A HEAT LOSS ASSESSMENT

The water volumes stated for our heat pumps are maximum estimates under optimal conditions. A precise heat loss assessment is essential to determine the right power for each installation.



VERTIGO FI

INNOVATIVE DESIGN & CUTTING-EDGE TECHNOLOGY

5.8 | 7.8 | 9.8 | 12.6 | 15.8 | 15.8 Tri | 20 20 Tri | 24 | 24 Tri | 29 Tri kW (at 15/26)

Up to 210 m³

WARRANTY 5 YEARS

For info, scan

SILENT JET FI



SO QUIET YOU'LL FORGET IT'S THERE

7.5 | 9.5 | 12.5 | 15 | 15 Tri kW (at 15/26)

Up to 150 m³

WARRANTY 3 YEARS

For info, scan

EXCLUDING PRO SELECTION

MEGALINE FI



FULL INVERTER TECHNOLOGY FOR COMMERCIAL POOLS

7.5 | 9.5 | 12.5 | 15 | 15 Tri kW (at 15/26)

For commercial pools and basins

WARRANTY 3 YEARS

For info, scan

ACCESSORIES



WiFi-Link

WI-FI ANTENNA OR OUTDOOR 4G ROUTER

Works wired or with a 4G Nano-SIM card

Up to 25 devices

IP66 waterproof

Range up to 50 metres

The WiFi-Link is a Wi-Fi antenna or 4G router designed to **connect your pool equipment** in a garden without Wi-Fi. It can link up to **25 devices** within a 50-metre range. Usable via a cable to an internet box or a 4G Nano-SIM card*, it offers speeds of up to 150 Mbps. **Waterproof**, it is ideal for outdoor installation.

*not supplied; subscription required with your internet service provider

Dimensions	76 × 152 × 25 mm
Reference	PC-POOLWLNK-4G
Power supply	12 DC 1 A
Wi-Fi	2.4 GHz
Connectors	WAN / LAN RJ45
Warranty	2 years



BY-PASS KIT 50

This by-pass kit connects your heat pump to your pool's filtration system. Compatible with the entire Poolex range (except Megaline).

INCLUDED IN THIS KIT

- 3 x Ø 50 mm valves
- 2 x Ø 50 mm elbows
- 2 x Ø 50 mm "T" fittings
- 1 tube of glue
- 1 bottle of cleaner

Reference	PC-BYPASS-50



BY-PASS KIT 32/38

This by-pass kit connects **your "mini" heat pumps** to the filtration system of your above-ground pool, with any filtration system.

INCLUDED IN THIS KIT

- 1 x Ø 50 mm 3-way valve
- 3 x Ø 32/38 mm adaptors
- 1 x Ø 32/38 mm "T" fitting
- 6 stainless steel hose clamps
- 1 roll of Teflon tape

Reference	PC-BYPASS-32

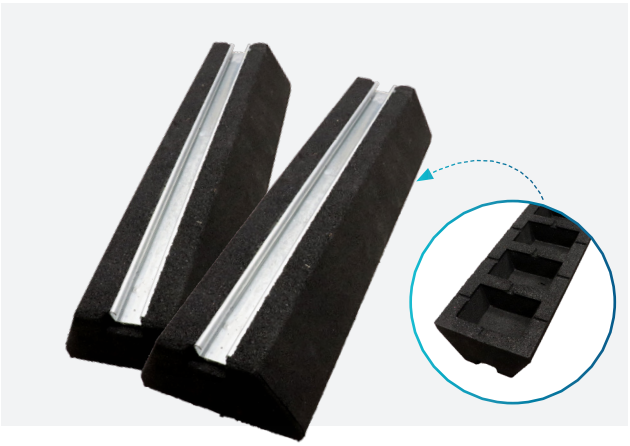

BIG FOOT **SUPPORTS**

Poolex Big Foot supports, made from **recycled tyres** with an aluminium rail, **are suitable for all our heat pumps**. Easy to install on flat ground (sand or gravel), their elasticity **reduces vibration and noise.**

* except Megaline and mini heat pumps

Dimensions	600 × 180 × 100 mm
Reference	PC-FEET60
Compatibility	The entire Poolex range*
Weight	10.8 kg
Material	Recycled tyre
Load capacity	450 kg



THERMOMETER
WITH REMOTE DISPLAY

This thermometer measures the temperature in **real time** using a **floating sensor**. The data is sent to the **wireless display**, ideal for **precise, convenient** monitoring. **Robust and waterproof**, it ensures **durability and ease** of use.

Reference	PC-THERM01WS
Waterproofing	IPX7
Battery	2 x AA 1.5 V batteries / unit (not included)
Warranty	2 years

SPAWER

Spa heat pumps

THE FUTURE OF SPA HEATING STARTS HERE

MORE COMFORT, LESS ENERGY

4 GOOD REASONS TO CHOOSE A SPAWER

1.

Limit your consumption

Enjoy your spa and cut your electricity bill.

2.

Schedule your session

Manage your spa temperature remotely with the Poolex app.

3.

Always the ideal temperature

With reversible mode, cooler water when it's hot.

4.

Special built-in chiller function

(O'Spa and O'Spa Flow)

O'Spa, O'Spa Flow: the highest-performing heat pumps in chiller mode.

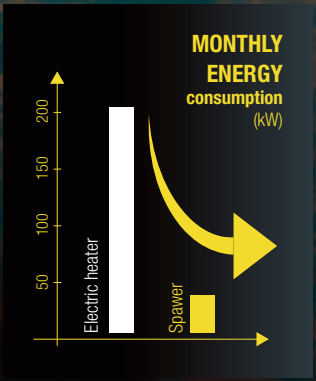

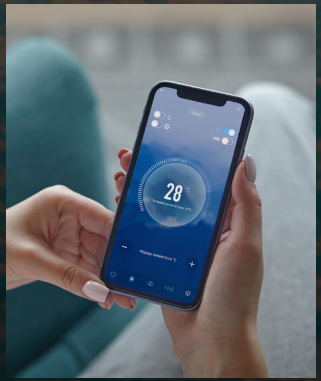



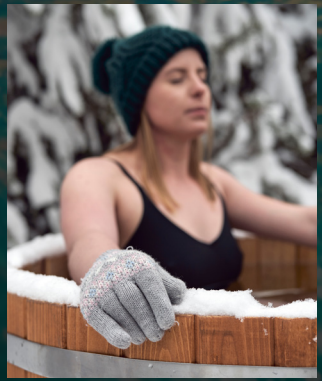



O'Spa
Versatile from 2° to 40°



O'Spa *Flow*
Versatile with filtration



Ice Spa
Powerful in every season

SPAWER

Ice Spa

THE POWER OF FULL INVERTER AND THE EFFICIENCY OF EVI DOWN TO -10 °C



Full Inverter technology

Extreme conditions down to -25 °C

Nexus Ready App, Cloud & OTA

Plug & Play

Ultra-compact dimensions

The Spawer IceSpa is a **spa heat pump** designed to maintain spa temperature even in extreme climates, **down to -25 °C**. It heats the spa while **reducing energy consumption** by up to 75% thanks to **Full Inverter** technology. **Easy** to install, it is **compatible with all types of spas**, swim spas and Nordic baths.

WARRANTIES

- **3 years**: all parts
- **7 years**: compressor
- **15 years**: titanium coil

ULTRA
HIGH-PERFORMANCE

EVI TECHNOLOGY
OPERATES DOWN TO -25 °C



Compact dimensions



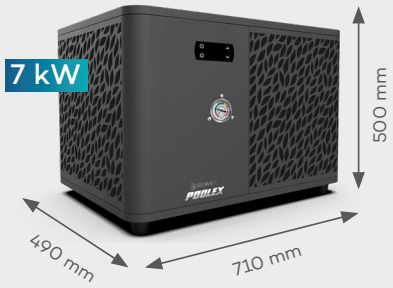

Remote control

Schedule your spa sessions remotely.



		5 kW	7 kW
	Reference: PC-ICESPA	51	70
Air 26 °C Water 26 °C Humidity 80%	Capacity (kW)	2.95 ~ 5.20	3.3~7
	Power input (kW)	0.34 ~ 0.67	0.28~1.4
	COP	8.6 ~ 7.6	5~11.9
Air 15 °C Water 38 °C Humidity 70%	Capacity (kW)	2.05 ~ 4.39	2.8~4.7
	Power input (kW)	0.40 ~ 0.67	0.67~1.3
	COP	5.1 ~ 4.7	3.7~4.2
Air -10 °C Water 38 °C Humidity 70%	**Capacity (kW)**	**0.97 ~ 3.10**	**2.2~3.3**
	Power input (kW)	**0.36 ~ 1.38**	**1.2~1.5**
	COP	**2.64 ~ 2.24**	**1.8~2.1**
Air 35 °C Water 27 °C Humidity 70%	Capacity (kW)	2 ~ 2.49	3.2~3.7
	Power input (kW)	0.40 ~ 0.55	0.87~1.2
	EER	5 ~ 4.5	3~3.7
Power supply		Single-phase 220-240 V / 50 Hz - 60 Hz	
Fittings		32/38	32 / 38 mm
Max power (kW)		2.1	1.7
Max current (A)		8	9
Heating temperature range		15 °C / 43 °C	
Cooling range		5 °C / 43 °C	
Operating range		-25 °C / 43 °C	
Flow rate (m³/h)		2.15	3
Refrigerant		R32	
Packaging dimensions (mm)		572 × 590 × 480	910 × 550 × 540
Dimensions (mm)		540 × 490 × 430	710 × 490 × 500
Net / gross weight (kg)		42/50	43 / 46
Noise at 1 m (dB(A))		< 50	< 48
Noise at 10 m (dB(A))		< 35	< 28
Compressor type		Rotary	
Heat exchanger		Twisted Tech© Titanium	
Function		Heating + Cooling	
Pressure drop (mWC)		0.1	0.4

*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

NEW

SPAWER

O'Spa *Flow*

R290

AN ALL-IN-ONE SOLUTION WITH BUILT-IN CIRCULATION



Chiller option included

Built-in circulation pump

Nexus Ready App, Cloud & OTA

Plug & Play

Ultra-compact dimensions

The Poolex O'Spa Flow heat pump switches to **R290 refrigerant**. Developed for **spas and Nordic baths**, it has a **built-in circulation pump**, guaranteeing a perfectly matched flow rate. Providing heating and cooling by **controlling the electric heater**, it offers a compact, connected, high-performance and energy-efficient all-in-one solution. You can now **control the water temperature perfectly**.

WARRANTIES

- **2 years**: all parts
- **5 years**: compressor
- **10 years**: titanium coil

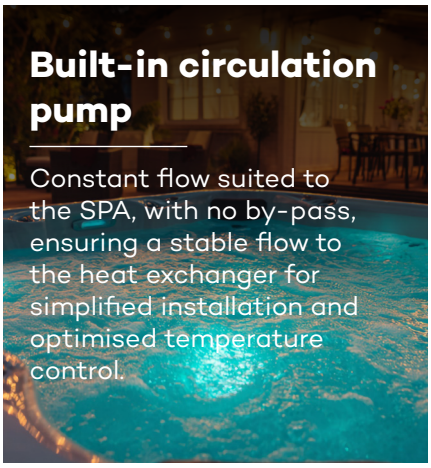

Built-in circulation pump

Constant flow suited to the SPA, with no by-pass, ensuring a stable flow to the heat exchanger for simplified installation and optimised temperature control.

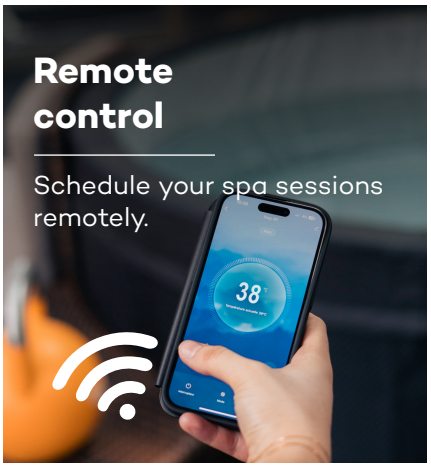

Remote control

Schedule your spa sessions remotely.

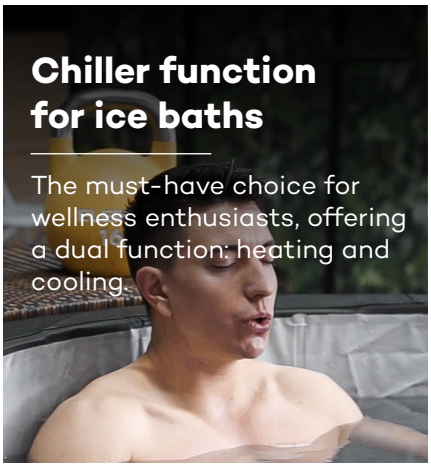

Chiller function for ice baths

The must-have choice for wellness enthusiasts, offering a dual function: heating and cooling.



The O'Spa Flow is also available in R32

To ensure continuity of our offer and support the transition to R290, while leaving you the choice of technology

For ⊕ info scan

		3 kW	5 kW	7 kW
	Reference: PC-OSPA2	35P	55P	75P
Air 26 °C Water 26 °C	Output power (kW)	3.30	5.00	7.00
	Power input (kW)	0.67	1.09	1.33
	COP	4.93	4.59	5.26
Air 15 °C Water 38 °C	Output power (kW)	2.30	3.40	4.75
	Power input (kW)	0.79	1.18	1.45
	COP	2.91	2.88	3.28
Air 35 °C Water 27 °C	Output power (kW)	1.80	2.25	3.70
	Power input (kW)	0.95	1.55	1.66
	EER	1.89	1.45	2.23
Air 15 °C Water 5 °C	Output power (kW)	1.35	2.10	2.60
	Power input (kW)	0.62	1.10	1.05
	EER	2.18	1.91	2.48
Power supply		Single-phase 220-240 V~50 Hz		
Heating temperature range		10 °C ~ 40 °C		
Cooling temperature range		2 °C ~ 30 °C		
Operating range*		-15 °C ~ 43 °C		
Max. power (kW)		1.1	1.6	2
Flow rate (m³/h)		1.4	2.15	3
Refrigerant		R290		
Packaging dimensions (mm)		570x450x450		750x550x500
Dimensions (mm)		520x490x370		695x495x420
Net / gross weight (kg)		29 / 32	32 / 35	37 / 41
Noise at 1 m (dB(A))		52	57	TBC
Noise at 10 m (dB(A))		32	37	TBC
Compressor		GMCC | Rotary	LANDA | Rotary	GMCC | Rotary
Heat exchanger		Twisted Tech© Titanium		
Function		Heating + Cooling (chiller) + Automatic		
Pressure drop (mWC)		0.4	0.8	1.2

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

NEW

SPAWER

O'Spa R290

THE ULTRA-VERSATILE SPA HEAT PUMP FROM 2 TO 40 °C



Chiller option included

More economical than a heater

Nexus Ready App, Cloud & OTA

Plug & Play

Ultra-compact dimensions

Now equipped with **natural R290 refrigerant**, the Poolex O'Spa combines **performance**, **energy efficiency** and **compliance with new environmental requirements**. Ultra-c**ompact**, it intelligently controls the spa's electric heater to optimise its operation and reduce energy consumption, while ensuring **efficient temperature rise**. Its **Chiller function** can also cool the water **down to 2 °C** for a true **cold plunge** experience, ideal after physical exercise.

WARRANTIES

- **2 years**: all parts
- **5 years**: compressor
- **10 years**: titanium coil

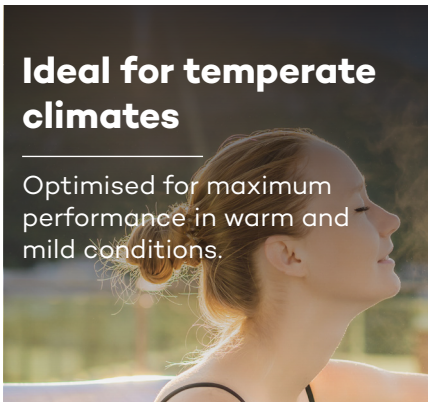

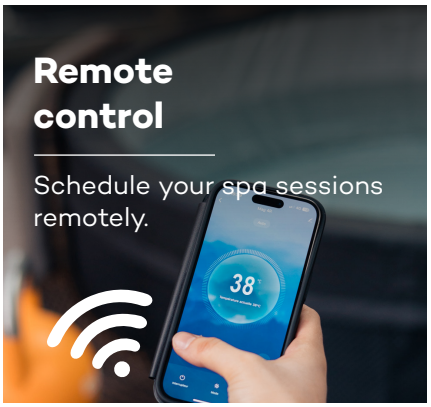

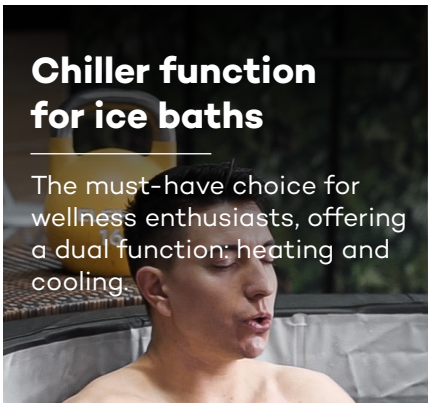



The O'Spa is also available in R32

To ensure continuity of our offer and support the transition to R290, while leaving you the choice of technology

For ⊕ info scan

		3 kW	5 kW	7 kW
	Reference: PC-OSPA2	35	55	75
Air 26 °C Water 26 °C	Output power (kW)	3.30	5.00	7.00
	Power input (kW)	0.62	1.04	1.28
	COP	5.30	4.80	5.45
Air 15 °C Water 38 °C	Output power (kW)	2.30	3.40	4.75
	Power input (kW)	0.74	1.13	1.40
	COP	3.10	3.00	3.40
Air 35 °C Water 27 °C	Output power (kW)	1.80	2.25	3.70
	Power input (kW)	0.90	1.50	1.61
	EER	2.00	1.50	2.30
Air 15 °C Water 5 °C	Output power (kW)	1.35	2.10	2.60
	Power input (kW)	0.57	1.05	1.00
	EER	2.35	2.00	2.60
Power supply		Single-phase 220-240 V~50 Hz		
Heating temperature range		10 °C ~ 40 °C		
Cooling temperature range		2 °C ~ 30 °C		
Operating range*		-15 °C ~ 43 °C		
Max. power (kW)		1.1	1.6	2
Flow rate (m³/h)		1.4	2.15	3
Refrigerant		R290		
Packaging dimensions (mm)		450x540x440		657x460x490
Dimensions (mm)		400x450x389		600x430x430
Net / gross weight (kg)		29 / 32	32 / 35	37 / 41
Noise at 1 m (dB(A))		52	57	TBC
Noise at 10 m (dB(A))		32	37	TBC
Compressor		GMCC | Rotary	LANDA | Rotary	GMCC | Rotary
Heat exchanger		Twisted Tech© Titanium		
Function		Heating + Cooling (chiller) + Automatic		
Pressure drop (mWC)		0.4	0.8	1.2

Specifications are subject to change; please refer to the latest product data sheet.
*In extreme conditions, the heat pump maintains the water temperature. Validate your sizing by carrying out a heat loss assessment.

SPAWER

ACCESSORIES

Scan to access the installation tutorial

Spa retrofit made easy

Adding a heat pump to an existing spa installation is simple. Just a few steps are needed to adapt the installation and connect the heat pump, while taking into account the layout of your space.

IN A FEW STEPS

1. **Open the spa and access the plumbing.**
2. **Create the by-pass** on the existing installation.
3. **Connect the heat pump to the by-pass** using the mounting option that best suits the layout of the space.
4. **Plug the heat pump** into its RCD socket.
5. **Fill the spa with water.**
6. **Start the spa and the heat pump.**

MOUNTING OPTION

OPTION 1



OPTION 2





By-pass kit

This Poolex by-pass kit connects your Spawer heat pump to your spa's filtration system, with any 48/50 mm diameter filtration system.



MOUNTING OPTION

OPTION 1



OPTION 2



Reference	SP-HLKITBYPASS



NOT SUPPLIED

Ø 50 mm rigid or flexible glue-in pipe

INCLUDED IN THIS KIT

- A 1 valve with 2 x Ø 50 mm union fittings
- B 2 x Ø 50/32 mm reducing T fittings
- C 2 reducing sleeves for Ø 48/ Ø 50 mm hose
- D 4 x 1 m of Ø 32 mm flexible PVC hose
- E 2 valves with 2 x Ø 32 mm union fittings
- F Flexible PVC glue + cleaner
- G 4 x Ø 32 mm glue-in sleeves
- H 2 x Ø 32 mm/1 threaded fittings
- I 2 x Ø 32 mm threaded union fittings
- J 1 roll of Teflon tape



Auxiliary relay

With this relay, your heat pump can control an auxiliary circulation pump, making the installation fully autonomous, or the spa heater.

Reference	PC-SWRELAY1



The remote touchscreen

You can add this remote display to your Spawer to control it remotely using its 10 m cable. Included with the IceSpa, it is optional on the O'Spa.

POOLEX

FILTRATION

Already offering a full range of filtration pumps and filters, **Poolex is launching a new generation of filtration pumps.**

A new range engineered by Poolex, combining high performance and innovation.




POOLEX
Variline X
POOLEX
Variline X ultra

A new generation.
A whole new dimension.

The new generation of Poolex pumps is built on one and the same standard, **from robust fixed speed to smart variable speed: every pump is designed for professionals, from installation to supervision.**



EASIER INSTALLATION

- ✓ **D50 union and retrofit fittings** supplied
- ✓ 2" threaded connection
- ✓ **Height and depth adjustments**
- ✓ **Self-priming up to 3.5 m**





FIXLINE X

Robustness and simplicity, **in a fixed-speed pump**



VARILINE X

Variable-speed filtration pump, programmable through the Poolex app



VARILINE X^{ultra}

"Fully programmable" filtration pump: touch control panel and Poolex app

THREE GOOD REASONS TO CHOOSE A POOLEX VARIABLE-SPEED PUMP

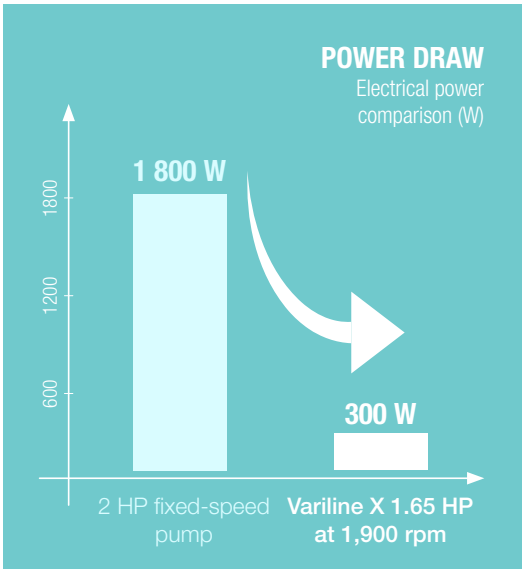

1. Up to 70% savings from the first season

Variable speed makes the difference compared with conventional pumps. Performance compared across 3 installation configurations: 6, 8 and 10 m TDH.

2. Silence, at last

An ultra-quiet pump you'll forget is there, with a noise level as low as 45 dB during slow filtration.

3. Clearer water

With slow filtration, the pump captures fine impurities and ensures even distribution of treatments throughout the pool.

NEXUS READY

PROFESSIONAL SUPERVISION

- **For homeowners:** scheduling, speeds and monitoring from the Poolex app.
- **For professionals:** supervision with remote diagnostics and intervention



FILTRATION PUMPS

NEW GENERATION

	Fixline X				Variline X		Variline X^{ultra}	
Pump type	Single-speed				Programmable variable speed *via the Poolex app*		Variable speed *fully programmable*	
Versions	075	100	150	200	150	200	150	200
Energy class*	D	D	C	D	A	A	A	A
Max. flow rate (m³/h)	19	21	27	30	28	31	28	31
Flow rate (m³/h) at 10 mWC	12	17	21	24	21	25	21	25
Power consumption (P1) (W)	750	1100	1500	1800	1100	1500	1100	1500
Noise level (dB at 1 m)	max. 58	max. 60	max. 62	max. 63	min. 45 max. 70	min. 45 max. 72	min. 45 max. 70	min. 45 max. 72
TDH max. (m)	14	17	18	20	18	22	18	22
Speed modulation	-				✓		✓	
Control	On/off				3 selectable and adjustable speeds		3 speeds, programmable	
Motor type	2-pole asynchronous IE3				8-pole permanent magnet synchronous IE5		8-pole permanent magnet synchronous IE5	
Self-priming	3.5 m				3.5 m		3.5 m	
Pre-filter	3.5 L				3.5 L		3.5 L	
Power supply	220-240 V ~ 50 Hz				110-240 V ~ 50/60 Hz			
Connections	2”							
Fittings included	Ø 50 mm glue-in union fittings & 50 mm retrofit kit (63 mm optional)							
Compatible with all treatments	✓				✓		✓	
Connectivity	Optional, with the Poolex relay				Built-in Wi-Fi · Nexus Ready		Built-in Wi-Fi · Nexus Ready · Modbus or relay	
Warranty	3 years				3 years		3 years	
Net weight (kg)	16,5	17,8	19,3	20,4	16,8	17	16,8	17

Specifications are subject to change; please refer to the latest product data sheet.
* Pump energy efficiency class, from A (most efficient) to F, according to EN17645. ** Based on €0.25/kWh, pumps at 3,000 rpm.

HOW TO CHOOSE YOUR FILTRATION PUMP?



Calculate the pool volume (m^3)

Rectangular: Length x width x height

Round: (ϖ x diam x diam /4) x average depth

Calculate the required flow rate

= volume ÷ 5 h (Poolex recommendation: turn the water over 5 times every 24 h).
Example: 60 m^3 ÷ 5 h = 12 m^3/h.

GOOD TO KNOW

Daily filtration time = water temperature ÷ 2, in hours.

Pump far from the pool or long pipework? See the 6, 8 and 10 m TDH tables on each product sheet.

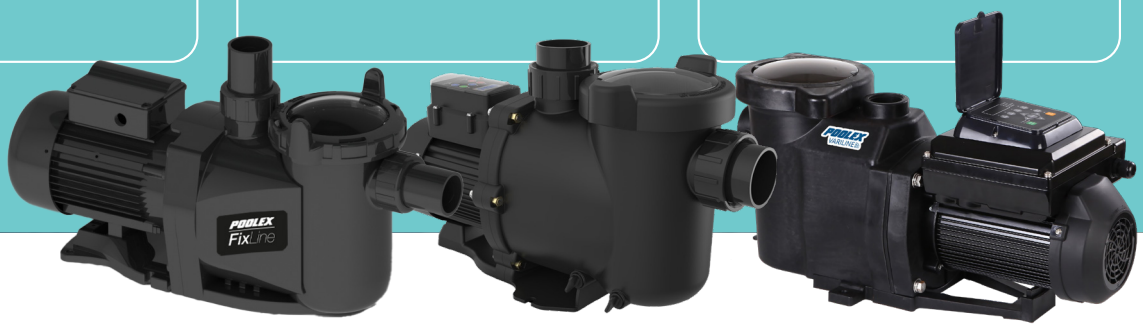

	Fixline					Multiline	Variline Wifi				
Pump type	Single-speed					Variable, manual selection	Connected variable speed				
Versions	075	100	150	200	300	150	15H	10P	15P	20P	30P
Energy class*	D	D	C	D	D	A	B	B	A	A	A
Max. flow rate (m^3/h)	19	22	25	29	32	22	21	23	27	29	31
Flow rate at 10 mWC (m^3/h) At 3,000 rpm for Multiline and Variline	12	17	21	24	26	16	17	18	22	24	28
Power consumption (P1) (W)	750	1100	1300	1800	2200	1000	1300	1300	1500	1800	2200
Noise level at 1 m (dB)	65		67		68	min. 45 max. 70	min. 45 max. 70			min. 45 max. 72	min. 45 max. 74
TDH max. (m^3)	14	17	18	20	21	16	20	20	23	25	26
Speed modulation	No					✓	✓				
Control	On/off					3 speeds,	3 speeds, programmable				
Motor type	2-pole asynchronous motor					Permanent magnet synchronous					
Self-priming	2 m					1 m	2 m				
Pre-filter	Large capacity										
Power supply	Single-phase 220-240 V ~ 50 Hz										
Connections	1,5" x 2" / 50 x 63 mm					2" x 2"	1"1/2	2"			
Fittings included	Ø 50/63 mm glue-in union					-	-				
Compatible with all treatments	✓					✓	✓				
Wi-Fi connectivity	Optional, with the Poolex relay					-	✓				
Warranty	3 years					3 years	3 years				
Net weight (kg)	13,2	14,	16,5	17,2	19,2	9	13,2	15			

NEW

Variline X ultra

VARIABLE SPEED
WITHOUT COMPROMISE





IE5 motor
Ultra Premium Efficiency

Self-priming
Up to 3.5 m

Programmable
variable speed

Touch screen

Nexus Ready App, Cloud & OTA

50 mm retrofit kit
included

The variable-speed pump in its most advanced version. Powerful, quiet and economical, it offers intuitive programming from its touchscreen or connected app, for complete control of filtration.

Variline X ultra 150

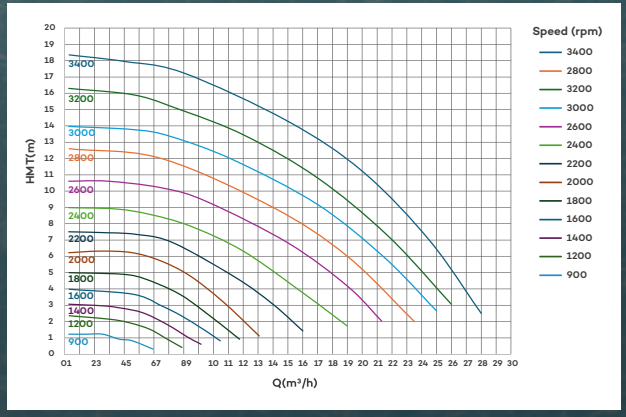

Variline X ultra 200

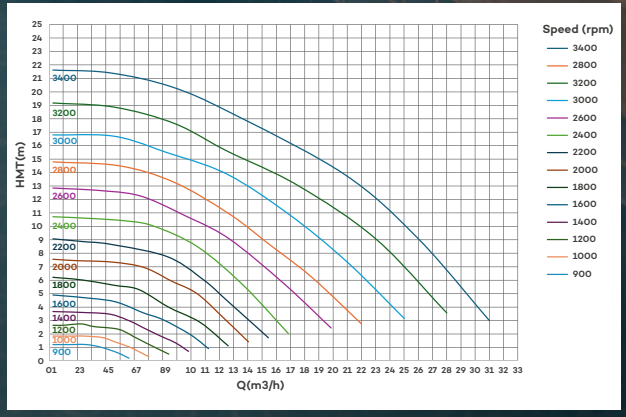



PERFORMANCE AT THE SOURCE & THE INTELLIGENCE OF THE RIGHT FLOW

An 8-pole permanent magnet synchronous motor, rated IE5 Ultra Premium Efficiency. At low speed, the pump consumes less than 40 W. **The Variline X^{ultra} continuously adjusts its speed to the pool's actual needs.**

Modbus



Control **from technical room to cloud**

On the pump. 4 programmable time slots on a premium display, even without a connection.

Remotely. the built-in Wi-Fi takes over via the Poolex app.

Pro installation. The cloud integrates your Variline X^{ultra} into your supervision.

Variline X^{ultra}	150	200
References	PF-VULT150	PF-VULT200
Energy class	**A**	**A**
Speed	Variable · continuous automatic adjustment, from 800 to 3,400 rpm	
Capacity	1.5 HP	2 HP
Max flow rate (m³/h)	28	31
Power consumption P1 (W)	From 40 W to 1100 W	From 40 W to 1500 W
Self-priming	3.5 m	
Standby power (W)	5	5
Noise level at 1 m (EN 17645)	min. 45 dB - max. 70 dB	min. 45 dB - max. 72 dB
Max. TDH (m)	18	22
Max. current (A)	5	7
Motor	8-pole permanent magnet synchronous IE5	
Programming	Touchscreen and 100% programmable	
Connectivity	Built-in Wi-Fi (Poolex app) · Nexus Ready · Modbus or relay (adaptor optional)	
Power supply	110-240 V ~ 50/60 Hz	
Connections	2" · Ø 50 mm glue-in union fittings & 50 mm retrofit kit	
Dimensions (L × W × H)	670 × 273 × 340 mm	
Weight (kg)	16.8	17
Warranty	3 years	

Specifications are subject to change; please refer to the latest product data sheet.

NEW

Variline X

Exclusive retail

VARIABLE SPEED WITH CONNECTED PROGRAMMING





IE5 motor
Ultra Premium Efficiency

Self-priming
Up to 3.5 m

Programmable variable speed
via the Poolex app

Large pre-filter basket
3 litres

Nexus Ready

50 mm retrofit kit
included

Power and savings: **3 speeds and 4 time slots** programmable from the Poolex app.

Variline X 150

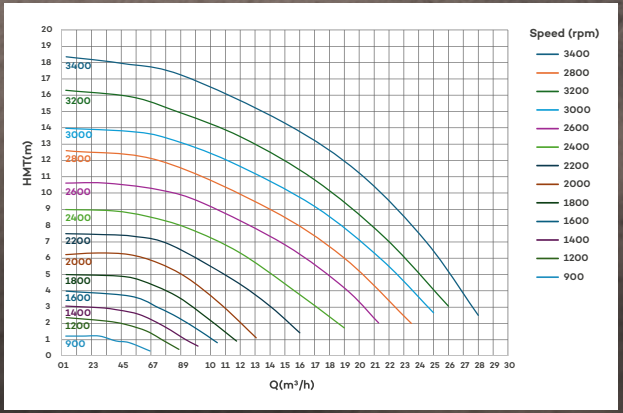

Variline X 200

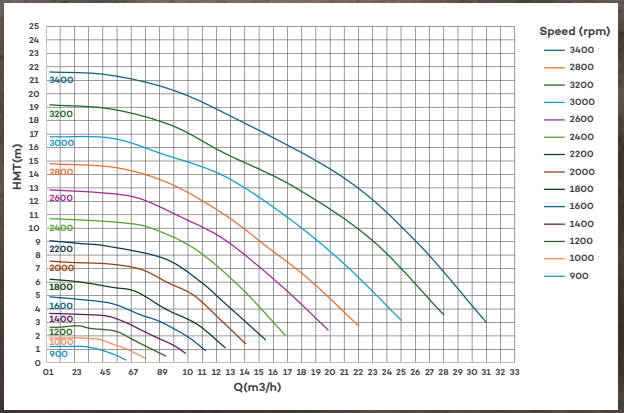

Precise filtration, scheduled to the pool's rhythm: the Variline X makes every hour of operation a useful hour.

At the heart of the Variline X is an IE5 permanent magnet synchronous motor, rated Ultra Premium Efficiency. Three programmable speeds cover all the pool's needs: a low speed, from 40 W, for quiet, continuous daily filtration, and higher speeds for cleaning or backwashing.

Four time slots can be programmed, each with its own speed, remotely from the Poolex app thanks to the built-in Wi-Fi.

Self-priming up to 3.5 m, A-rated and supplied with its 50 mm retrofit kit, it replaces a 1.5 or 2 HP fixed-speed pump with no building work, and cuts the bill from the very first season.



Two ways to control

On the pump. 3 selectable and adjustable speeds via the display.

Remotely. Up to 4 time schedules via the Poolex app.

Pro installation. The cloud integrates your Variline X into your supervision



Variline X	150	200
Reference	PF-VLX150	PF-VLX200
Energy class	**A**	**A**
Speed	Variable · 3 programmable speeds, from 800 to 3,400 rpm	
Capacity	1.5 HP	2 HP
Max. flow rate (m³/h)	28	31
Power consumption P1	From 40 W to 1100 W	From 40 W to 1500 W
Self-priming	3.5 m (can be disabled)	
Standby power	5	5
Noise level at 1 m (EN 17645)	min. 45 dB - max. 70 dB	min. 45 dB - max. 72 dB
Max. TDH (m)	18	22
Max. current (A)	5	7
Motor	8-pole permanent magnet synchronous IE5	
Programming	Digital control panel (speed selection and adjustment) Time scheduling via the Poolex app	
Connectivity	Built-in Wi-Fi (Poolex app) · Nexus Ready	
Power supply	110-240 V ~ 50/60 Hz	
Connection	2" · Ø 50 mm glue-in union fittings & 50 mm retrofit kit	
Dimensions (L × W × H)	670 × 273 × 340 mm	
Weight (kg)	16.8	17
Warranty	3 years	

Specifications are subject to change; please refer to the latest product data sheet.

NEW

Fixline X

Exclusive retail

ROBUSTNESS AND SIMPLICITY IN FIXED SPEED



High-efficiency IE3 motor
Premium Efficiency

Self-priming
Up to 3.5 m

Large pre-filter basket
3 litres

Compatible with all treatments
Chlorine, salt, active oxygen...

Ø 50 mm fittings
supplied

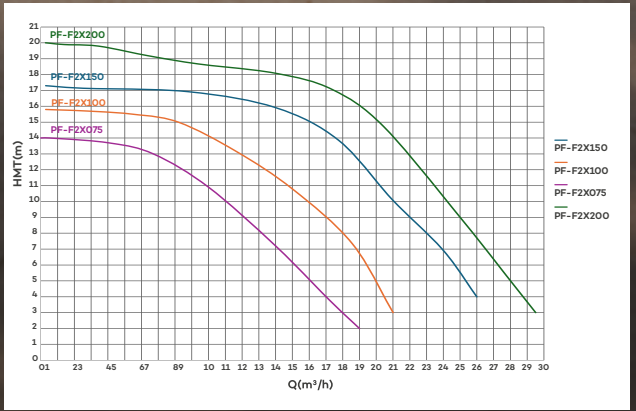

Essential fixed speed: **power, efficiency and affordability**, from 0.75 to 2 HP.

Fixline X is fixed speed at its most robust and simple. Its IE3 Premium Efficiency motor delivers up to 28 m³/h and 20 m of head with optimised efficiency, for powerful and steady circulation, even on demanding installations. Self-priming up to 3.5 m secures every start-up, even when the pump is installed above water level.

Built to last, it combines a large 3-litre pre-filter basket, a reinforced mechanical seal and IPX5 protection. Supplied with Ø 50 mm glue-in fittings, it easily replaces an existing pump. As an option, the Poolex relay connects it to the Poolex ecosystem.



Becomes connected with the Poolex relay

The Poolex relay (optional) replaces the timer on the pump contactor: the Fixline X joins the Poolex ecosystem, can be programmed from the app and controlled via Nexus.

Reference	PC-RELAYW-M16

EASY INSTALLATION IN RENOVATION PROJECTS

- ✓ Ø 50 mm glue-in fittings supplied (63 mm optional), retrofit, self-priming up to 3.5 m.
- ✓ Large 3-litre pre-filter basket



Fixline X	075	100	150	200
Reference	PF-F2X075	PF-F2X100	PF-F2X150	PF-F2X200
Energy class	D	D	C	D
Output power (HP) - P2	0.75	1	1.5	2
Power consumption (W) - P1	750	1100	1500	1800
Max. TDH (m)	14	17	18	20
Max. current (A)	3.5	5	6.8	8.2
Motor	2-pole asynchronous IE3 · IPX5			
Self-priming	3.5 m (can be disabled)			
Power supply	220-240 V ~ 50 Hz			
Connection	2" · Ø 50 mm glue-in union fittings & 50 mm retrofit kit			
Connectivity	Optional, with the Poolex relay			
Dimensions (L × W × H)	670 × 273 × 340 mm			
Weight (kg)	16.5	17.8	19.3	20.4
Warranty	3 years			

Specifications are subject to change; please refer to the latest product data sheet.



OUR FILTRATION PUMPS STILL AVAILABLE



Variline Wi-Fi

THE CONNECTED VARIABLE-SPEED FILTRATION PUMP

5 versions available

- Programmable variable speed
- Energy savings
- Compatible with all treatments
- Wi-Fi connection

WARRANTY
3 YEARS

For ⊕ info, scan

ECONOMICAL

Running a VS pump at 50% for 24 h rather than an On/Off pump for 8 h saves nearly 80% of energy.

FILTRATION

Water passes through the filter more slowly, improving filtration, and the filter also clogs less quickly.

LONGEVITY

Longer service life thanks to low-speed operation, which reduces wear, heat and stress on the system.

QUIET

At reduced speed, the noise level is divided by 4 compared with a constant-speed pump (< 45 dB)





Multiline

HYBRID INNOVATION: MANUAL MULTI-SPEED

1 version available

- Manual 3-speed selection
- Energy savings
- Compatible with all treatments
- Quiet < 45 dB

WARRANTY 3 YEARS

For ⊕ info, scan



Fixline

THE SINGLE-SPEED FILTRATION PUMP

5 versions available

- Single-speed
- Robust
- Compatible with all treatments
- Compact dimensions

WARRANTY 3 YEARS

For ⊕ info, scan

CARTRIDGE FILTERS



THINCLEAR

	MONO	MULTI
Filter media type	Cartridge	
Number of models	3	4
Pool size	from 80 to 110 m³	from 110 to 190 m³
Cleaning frequency (filter rinse or tank backwash)	● ● ○	● ○ ○
Pool type	Above-ground + Residential	Residential
Filtering capacity	15 µm	
6-way valve	None	
Lid	Opaque	
Water volume / h	from 13 to 19 m³/h	from 18 to 32 m³/h
Opening / Closing	Quick-release ring	
Material	Fibre-reinforced polypropylene	
Tank warranty	10 years	
Built-in filtration pump	-	
Inlet / outlet connections	50 / 63 mm	
Backwash	-	



SAND FILTERS

ROCK		ULTRA	
TOP	**SIDE**	**TOP**	**SIDE**
Pureflow / Sand / Glass		Pureflow / Sand / Glass	
3	4	2	5
from 60 to 125 m³	from 60 to 185 m³	from 60 to 80 m³	from 60 to 180 m³
● ● ●		● ● ●	
Residential		Residential	
10 µm / 40 µm		10 µm / 40 µm	
Top	Side	Top	Side
Opaque	Transparent	Opaque	Transparent
from 10 to 22 m³/h	from 10 to 32 m³/h	from 10 to 14 m³/h	from 10 to 30 m³/h
Clamp with screw lock		Clamp with screw lock	
Fibre-reinforced polyester		HDPE	
10 years		10 years	
-		-	
50 / 63 mm		50 mm	50 / 63 mm
✓		✓	

Thinclear mono

SWIM IN PERFECTLY FILTERED WATER



More eco-friendly
no backwashing

Filtration down to
15 µm

Corrosion
resistant

Durable
materials

Easy
to use

Thinclear Mono offers a large filtration area, able to finely remove impurities down to **15 microns**. Ideal for **pools up to 110 m³**, it takes a single cartridge per model. Each model has a different cartridge size. Unlike a sand filter, its cartridges require **no backwashing** and are simply cleaned with a hose, **saving a large amount of water** every year.

WARRANTIES

- **10 years**: tank
- **3 years**: valve *(excluding seals - domes - pressure gauges)*

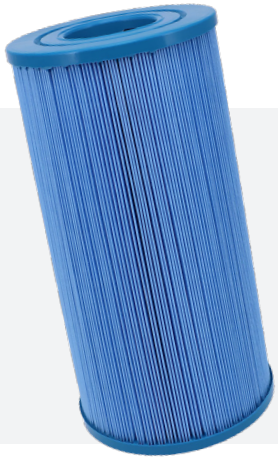

1 FILTER CARTRIDGE INCLUDED

The filter cartridge is a high-quality filtration solution, delivering outstanding performance thanks to advanced filter materials.

Water saving | **Easy to maintain** | **Filtration fineness** | **Durability**



Quick-release locking ring





Inlet and outlet fitting

FEATURES

THINCLEAR MONO	**THINCLEAR** 100	**THINCLEAR** 150	**THINCLEAR** 200
References	PF-TCR100	PF-TCR150	PF-TCR200
Maximum flow rate (m^3/h)	22.7	27.2	27.2
Recommended flow rate (m^3/h)	13	17	19
Filtration area (m^2)	9.29	13.94	18.58
Treatable volume (m^3) (based on an average filtration time of 6 h)	80	100	110
Inlet/outlet connections	2"/2.5"- 50/63 mm		
Dimensions in mm (AxBxC)	825 × 444.5 × 588	910 × 444.5 × 588	1033 × 444.5 × 588
Dimensions in mm (DxExF)	304 × 335 × 91		
Flow velocity ($m^3/h/m^2$)	1.5	1.2	1
Tank warranty	10 years		

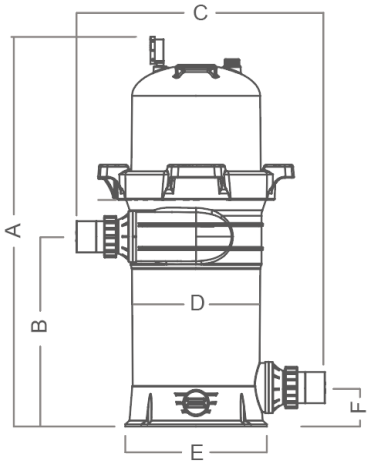



	100	**150**	**200**
References	PF-TCR100CT	PF-TCR150CT	PF-TCR200CT
Dimension G (in mm)	Ø 497	Ø 590	Ø 717
Dimension H (in mm)	Ø 267		
Filtration fineness (µm)	15		
Number of pleats	137	172	187

Information given for guidance only and subject to change without notice

Thinclear multi

FOR ULTRA-CLEAR, CRYSTAL-CLEAR WATER



More eco-friendly
no backwashing

Filtration down to
15 µm

Corrosion
resistant

Durable
materials

Easy
to use

Thinclear Multi offers a large filtration area, able to finely remove impurities down to **15 microns**. Ideal for **large volumes**, it takes several cartridges for increased capacity. Unlike a sand filter, its cartridges require **no backwashing** and are simply cleaned with a hose, **saving a large amount of water** every year.

WARRANTIES

- **10 years**: tank
- **3 years**: valve *(excluding seals - domes - pressure gauges)*

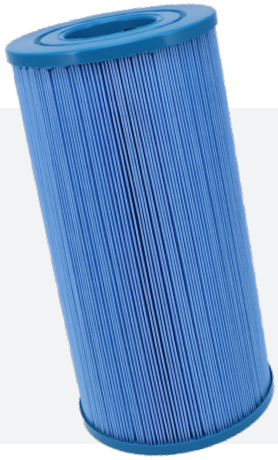

FILTER CARTRIDGES INCLUDED

The filter cartridge is a high-quality filtration solution, delivering outstanding performance thanks to advanced filter materials.

Water saving | **Easy to maintain** | **Filtration fineness** | **Durability**



Quick-release locking ring





Inlet and outlet

FEATURES

THINCLEAR MONO	THINCLEAR 330	THINCLEAR 430	THINCLEAR 530	THINCLEAR 680
References	PF-TCR330	PF-TCR430	PF-TCR530	PF-TCR680
Maximum flow rate (m^3/h)	28.1	34.1	34.1	34.1
Recommended flow rate (m^3/h)	18	20	25	32
Filtration area (m^2)	30.73	39.97	49.19	63.17
Treatable volume (m^3) (based on an average filtration time of 6 h)	110	120	145	190
Inlet/outlet connections	2"/2.5"-50/63 mm			
Dimensions in mm (AxBxC)	886 × 648 x 556	1035 × 648 x 556	1223 × 648 x 556	1362 × 648 x 556
Dimensions in mm (DxExF)	504 × 462 × 317.5 × 444.5			
Flow velocity ($m^3/h/m^2$)	0.6	0.5	0.5	0.5
Tank warranty	10 years			

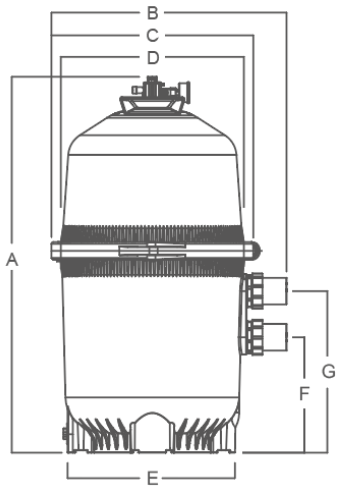



	330	430	530	680
References	PF-TCR330CT	PF-TCR430CT	PF-TCR530CT	PF-TCR680CT
Dimension H (in mm)	Ø 498	Ø 647	Ø 835	Ø 485
Dimension I (in mm)	Ø 178			
Filtration fineness (µm)	15			
Number of pleats	198	197	187	209
Number of elements	4			8

Information given for guidance only and subject to change without notice

Rock top & side

FOR ULTRA-CLEAR, CRYSTAL-CLEAR WATER



Ultra-resistant tank
fibre-reinforced polyester + gelcoat

Compatible with a wide range of filtration pumps

Durable materials

Easy to use

Rock Top & Rock Side filters provide efficient filtration thanks to their **robust laminated construction**, **pressure-resistant** and **durable**. Their design **makes maintenance easy**, with simple cleaning and replacement of the filter elements. **Compatible** with a wide range of pumps, they integrate easily into different filtration systems.

WARRANTIES

- **10 years**: tank
- **3 years**: valve *(excluding seals - domes - pressure gauges)*



Clamp with screw lock



Robust 6-way valve in ABS and stainless steel.

Tank materials
Reinforced fibreglass laminate

Max operating pressure
36 psi / 2.5 bar

Filter media grain size
0.5-0.8 mm

Maximum temperature
40 °C (104 °F)

FEATURES ROCK TOP

ROCK TOP	TOP 500	TOP 650	TOP 750
References	PF-RCK500T	PF-RCK650T	PF-RCK750T
Maximum flow rate (m^3/h)	10	16.5	22
Diameter (mm)	Ø 500	Ø 650	Ø 750
Filtration area (m^2)	0.20	0.33	0.44
Treatable volume (m^3) (based on an average filtration time of 6 h)	60	95	125
Inlet/outlet connections	1.5"/ 50 mm		2.0"/ 63 mm
Dimensions in mm (AxBxC)	886 × 750 × 693	998 × 862 × 805	1159 × 1029 × 945
Dimensions in mm (DxExF)	286 × 390 × 500	318 × 500 × 650	251 × 500 × 750
Sand (kg) / Glass (kg)	88 / 70	158 / 125	260 / 210
Warranty	Tank: 10 years / Valve: 3 years		

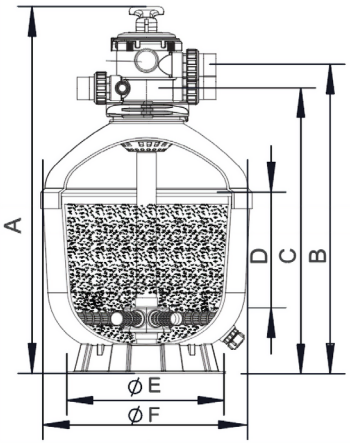

FEATURES ROCK SIDE

ROCK SIDE	SIDE 500	SIDE 650	SIDE 750	SIDE 900
References	PF-RCK500S	PF-RCK650S	PF-RCK750S	PF-RCK900S
Maximum flow rate (m^3/h)	10	16.5	22.1	31.8
Diameter (mm)	Ø 500	Ø 650	Ø 750	Ø 900
Filtration area (m^2)	0.20	0.33	0.44	0.64
Treatable volume (m^3 over approx. 6 h)	60	95	125	185
Inlet/outlet connections	1.5"/ 50 mm		2.0"/ 63 mm	
Dimensions in mm (AxBxC)	424 × 487 × 845	472 × 535 × 943	517 × 603 × 1015	583 × 669 × 1165
Dimensions in mm (DxExF)	360 × 516 × 390	380 × 666 × 390	440 × 770 × 500	480 × 920 × 780
Sand (kg) / Glass (kg)	100 / 70	185 / 150	265 / 215	405 / 325
Warranty	Tank: 10 years / Valve: 3 years			

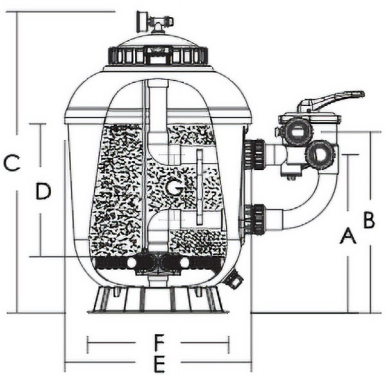

Information given for guidance only and subject to change without notice

Ultra top & side

GET CRYSTAL-CLEAR WATER EFFORTLESSLY



Ultra-light tank
recyclable HDPE

Compatible with a wide range of filtration pumps

Durable materials

Easy to use

Ultra Top & Ultra Side sand filters, **resistant to high pressures**, ensure **outstanding durability** even in demanding environments. Their **simplified maintenance** reduces downtime, and they integrate easily with a variety of pumps, optimising energy efficiency. Suitable for residential and public pools, they deliver exceptional filtration, **extended service life** and great **ease of maintenance**.

WARRANTIES

- **10 years**: tank
- **3 years**: valve *(excluding seals - domes - pressure gauges)*

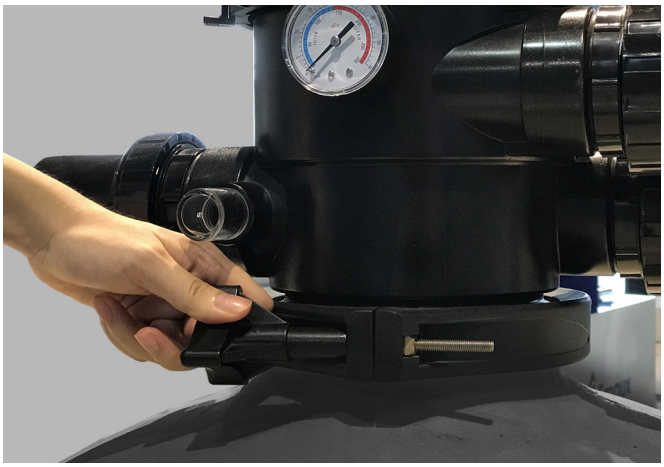

Clamp with screw lock

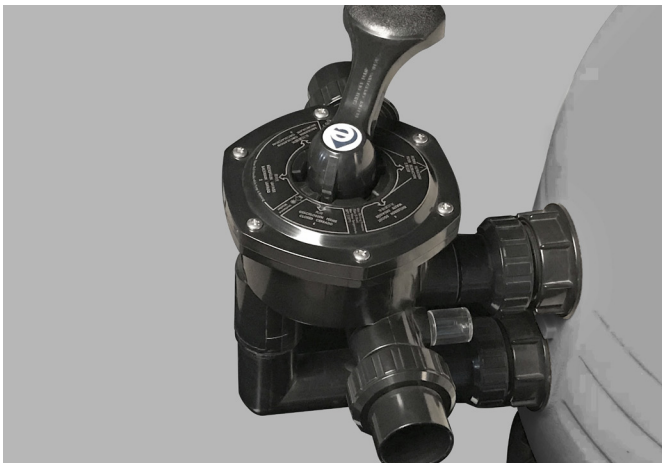

Robust 6-way valve in ABS and stainless steel.

Tank materials
HDPE (high-density polyethylene)

Max operating pressure
40 psi / 2.8 bar

Filter media grain size
0.5-0.8 mm

Maximum temperature
50 °C (122 °F)

FEATURES ULTRA TOP

ULTRA TOP	TOP 20	TOP 24
References	PF-ULT500T	PF-ULT600T
Maximum flow rate (m^3/h)	10	14
Diameter (mm)	Ø 500	Ø 600
Filtration area (m^2)	0.20	0.28
Treatable volume (m^3) (based on an average filtration time of 6 h)	60	80
Inlet/outlet connections	1.5"/ 50 mm	
Dimensions in mm (AxBxC)	889 × 772 × 712	980 × 860 × 800
Sand (kg) / Glass (kg)	70 / 55	125 / 100
Warranty	Tank: 10 years / Valve: 3 years	

ULTRA TOP



ULTRA SIDE



FEATURES ULTRA SIDE

ULTRA SIDE	SIDE 20	SIDE 24	SIDE 27	SIDE 31	SIDE 35
References	PF-ULT500S	PF-ULT600S	PF-ULT675S	PF-ULT775S	PF-ULT875S
Maximum flow rate (m^3/h)	10	14	18	23.5	30.5
Diameter (mm)	Ø 500	Ø 600	Ø 675	Ø 775	Ø 875
Filtration area (m^2)	0.20	0.28	0.36	0.47	0.61
Treatable volume (m^3 over approx. 6 h)	60	80	105	140	180
Inlet/outlet connections	1.5"/ 50 mm		2.0"/ 63 mm		
Dimensions in mm (AxBxC)	396 × 549 × 760	430 × 493 × 825	460 × 546 × 946	508 × 594 × 968	564 × 650 × 1086
Dimensions in mm (DxExF)	225 × 500 × 125	280 × 600 × 125	300 × 675 × 130	370 × 775 × 130	440 × 875 × 130
Sand (kg) / Glass (kg)	70 / 55	125 / 100	185 / 150	320 / 255	430 / 345
Warranty	Tank: 10 years / Valve: 3 years				

Information given for guidance only and subject to change without notice

Optiball 700 g

THE ECO-RESPONSIBLE CHOICE:
UNIVERSAL FILTER BALLS



More environmentally friendly

Filtration down to 3 µm

100% recyclable polyethylene

Easy to use

Optiball is an ideal solution for keeping **water clean and healthy** while **limiting environmental and economic impact**. These filter balls effectively remove organic contaminants and suspended particles. **Washable and eco-friendly**, they provide quality filtration while reducing the carbon footprint of pool maintenance.

Reference	PF-OPTIBALL700C
Quantity	700 g
Filtration fineness	Down to 3 µm

COMPATIBLE WITH SAND FILTERS



700 g of Optiball = **25 kg** of sand = **20 kg** of glass

Choose an ultra-light media that is easy to handle and move, and can be washed with a cold-water hose or in the washing machine, in a bag, at 30 °C without detergent.





Choose an ultra-light media that is easy to handle and move, and can be washed with a cold-water hose or in the washing machine, in a bag, at 30 °C without detergent.

OPTIMAX 100 G
BALL CARTRIDGE

More environmentally friendly

Filtration down to 3 µm

100% recyclable polyethylene

Discover the power of pure water with Optimax. Featuring an eco-friendly reusable net, this cartridge has a filter base impregnated with activated carbon for exceptionally clear water. Its extended service life provides reliable, economical filtration, while its simple installation makes it accessible to everyone.

The ball cartridge replaces a type A filter cartridge *(Ø 10.5 cm and h 20 cm)*

Reference	PF-OPTIMAXC
Quantity	100 g
Filtration fineness	Down to 3 µm
Compatibility	Type A cartridge

PUREFLOW
HIGH-PERFORMANCE POLYMER FILTER



JL-P12058



JL-P14106

No pressure build-up in the filter

No clogging

The ideal replacement for filter sand

This filter media made of polymer fibres is an excellent replacement for the sand, glass or zeolite in a sand filter. Ultra-light, 500 g of Pureflow replaces 36 kg of sand! It filters down to 10 µm, does not create biofilm, reduces backwashing and limits pressure in the filter.

JL-P12058
130 g
= 10 kg of sand
Ideal for sand filters

JL-P14106
Pack of 2 cartridges
Ideal for replacing a spa filter

POOLEX

TREATMENT

Electrolysis, regulation and now liquid chlorine and pH dosing pumps:
the high-performance pool treatment range, for equipment precisely matched to each pool's needs.




POOLEX
Aqualyser
72
650

WATER TREATMENT

SALT CHLORINATORS







	AQUALYSER TOTAL & FLEX			MODULYSER				
Models	NEW 12	NEW 15	20	NEW 5	10	15	20	25
Pool type	In-ground			In-ground				
Max. pool volume	50 m³	75 m³	90 m³	25 m³	50 m³	75 m³	90 m³	110 m³
Max. production (g/h)	12	15	20	5	10	15	20	25
Salinity	From 2.7 to 4.5 ppm			From 2.7 to 4.5 ppm				
Modes	4 modes: ORP / pH minus / Timer / Manual			3 modes: Flow / Timer / ORP optional				
Connection	D50 mm glue-in			D50 mm glue-in				
Alarms	Salt level too high / low, insufficient water flow			Salt level too high / low, insufficient water flow				
Cell orientation	Horizontal			Horizontal or vertical				
Probes	Included pH & ORP probes			Temperature probe / ORP optional				
Analysis chamber	✓			-				
Cell type	Bipolar cell			Bipolar cell				
Cell life	10 000 h			10 000 h				
Built-in flow detector	✓			On clamp saddle				
Connectivity	Nexus Ready · App, Cloud, OTA			Nexus Ready · App, Cloud, OTA				
Pool Terre	Included			Included on clamp saddle				



NEOLYSER					SEL IN					
20	30	50	75	90	20	30	50	75	90	120
In-ground					In-ground (& above-ground as an option)					
20 m³	30 m³	50 m³	75 m³	90 m³	20 m³	30 m³	50 m³	75 m³	90 m³	120 m³
4	6	10	15	20	4	6	10	15	20	30
From 2.7 to 4.5 ppm					From 2.7 to 4.5 ppm					
8 operating modes, including 3 boost and ORP					6 modes: Cover / Spring / Comfort / Summer / Summer+ / Boost ++					
D50 mm glue-in					D50 mm & 32/38 mm					
Salt level too high / low, insufficient water flow					Salt level / Flow					
Horizontal or vertical					Horizontal or vertical					
Temperature probe / ORP optional					Temperature probe					
-					-					
Bipolar cell					Bipolar cell					
10 000 h					10 000 h					
✓					✓					
Nexus Ready · App, Cloud, OTA					-					
Included on clamp saddle					Included on clamp saddle					



DOSING PUMPS

	ORP	pH
	15	12
pH pump max flow rate (L/h)	2.4	
Corrective product	Liquid chlorine = Sodium hypochlorite	pH minus 15% (or more)
pH measuring range / (set point)	600-800 mV / (450 - 850 mV)	6.8 - 8.0 / (6.8 - 7.6)
Regulation mode	Proportional (based on pool volume)	
Probe supplied, calibration and warranty	ORP probe, D50 mm clamp saddle and 475 mV calibration solution supplied	pH probe, D50 mm clamp saddle and pH 7.00 calibration solution supplied
Connectivity (Wi-Fi)	Nexus Ready · App, Cloud, OTA	
Alerts and safety features (overdosing, empty container, filtration interlock, notifications)	- Insufficient flow (flow detector supplied, no filtration interlock as too risky) - Temperature error - Empty container detection - Stop if overdosing has no effect - Recalibration reminder	
Max. pool volume	130 m³	
Box dimensions (mm) and IP rating	Approx. 190 × 100 × 155 - IPX4	

Specifications are subject to change; please refer to the latest product data sheet.

A recognised player

With **many years of experience in salt pool treatment**, Poolex has become a recognised player in the market, with **a complete and innovative product range** combining simplicity, performance and cutting-edge technology. Our range meets the needs of all types of installations and pools, with an offer that expands in 2027 to provide **outputs precisely matched to each pool**. **Our latest additions: our liquid chlorine and pH dosing pumps open up the range to automated liquid chlorine treatment.**



OUR CORE RANGE

SALT ELECTROLYSIS

Chlorine is produced continuously from the salt dissolved in the water.

- ✓ **Swimming comfort:** gentle on skin and eyes
- ✓ **Chlorine produced on site:** no storage, no handling
- ✓ **No excess stabiliser:** unlike chlorine tablets
- ✓ **Economical to use:** no chlorine to buy, just top up the salt

NEW FOR 2027 AN EXTENDED RANGE

DOSE PRECISELY. TREAT BETTER.

More references across the whole range, **for more precise sizing**, and maximum performance and efficiency, while keeping products affordable.

- **Sizing** according to volume
- **Production** matched **to actual needs**
- No compromise on **cell life**
- **The right price** for your customer

NEW FOR 2027

Liquid chlorine

Our liquid chlorine and pH dosing pumps round out the range to offer **a complementary treatment solution.**

Materials preserved
suitable for natural stone copings

Hard water compatible
suitable for limescale-rich water

Cold water compatible
More effective at low temperatures

No excess stabiliser
unlike chlorine tablets

NEXUS **CONNECTIVITY**

CONNECTED, AUTOMATED EQUIPMENT

BALANCED WATER, WITH NO DAILY INTERVENTION

- ✓ Remote settings
- ✓ Real-time monitoring
- ✓ Alerts
- ✓ Professional supervision

Aqualyser

Exclusive retail

FULLY AUTOMATED TREATMENT



Compatible with pools up to 90 m³

pH + ORP probes

Nexus Ready App, Cloud & OTA

Built-in lighting

2 versions: Total & Flex

This precise system keeps water clean and healthy at all times with simple, effective management. Equipped with a **redox probe**, it continuously measures the disinfectant level and **automatically adjusts chlorine gas production** to the pool's actual needs. A pH probe **monitors the water's pH level** and **regulates** the pump to ensure perfect balance. Its "Total" version is the 1st compact combined salt chlorinator, a true all-in-one.

WARRANTY

- **5 years**: housing + cell (10,000 h)
  excluding wear parts

Flexible installation

With its 2 versions, Total & Flex, it easily adapts to your technical room.





NEW CAPACITY

AQUALYSER AVAILABLE IN

12 | 15 | 20 g/h



TOTAL

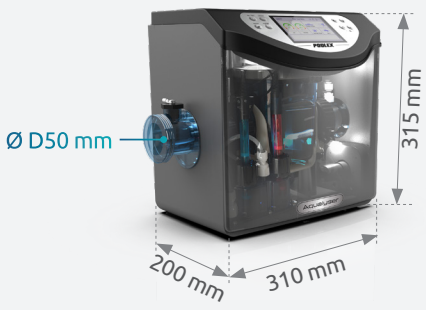





Aqualyser

FULLY AUTOMATED TREATMENT

FLEX VERSION (MODULAR)

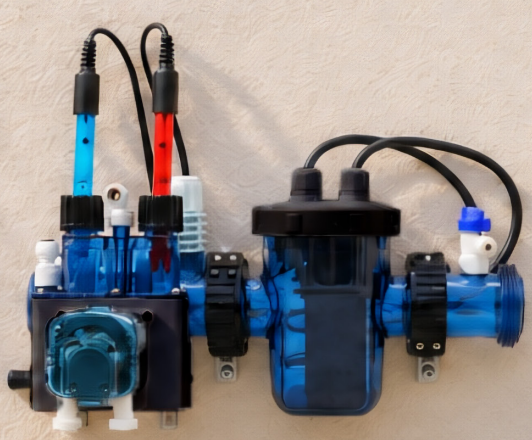



AN INSTALLATION THAT ADAPTS TO YOUR TECHNICAL ROOM

With its modular design, the Aqualyser Flex offers great freedom of installation. Its components can easily be positioned to suit the configuration and available space, making it easy to fit into any technical room.



FLEX



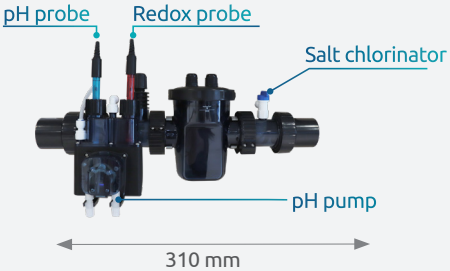



DEDICATED APP, OTA & CLOUD

Nexus Ready

Control and monitor your equipment remotely, simply and efficiently.

- Real-time monitoring of water parameters
- Remote settings and control
- Data history
- Automatic OTA updates
- Remote diagnostics & support
- Fewer site visits and call-outs

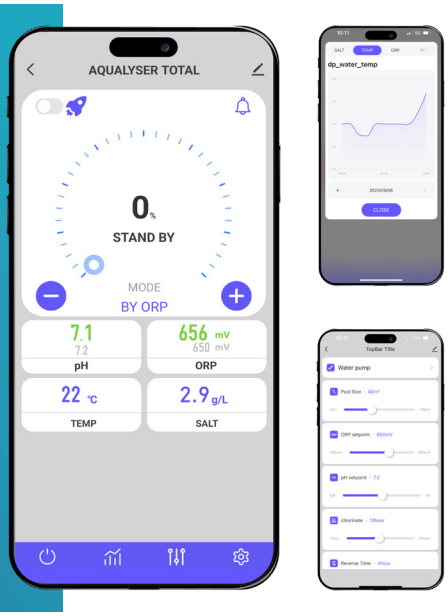

Model	TOTAL			FLEX		
Reference	NEW CL-AQUALYSR-TL1-12	NEW CL-AQUALYSR-TL1-15	CL-AQUALYSR-TL1	NEW CL-AQUALYSR-FX1-12	NEW CL-AQUALYSR-FX1-15	CL-AQUALYSR-FX1
Pool volume	< 50 m³	< 75 m³	< 90 m³	< 50 m³	< 75 m³	< 90 m³
Chlorine production	12 g/h	15 g/h	20 g/h	12 g/h	15 g/h	20 g/h
Salinity	From 2.7 to 4.5 ppm					
Modes	4 modes: ORP / pH minus / Timer / Manual					
pH- pump flow rate	0.2 L/min					
Connection	D50 mm glue-in					
Max/standby power	150 W / 5 W					
Polarity reversal	Yes, adjustable: 4 / 6 or 8 h					
Probes & sensors	pH & ORP probes included, temperature & flow					
Filtration pump relay control	Yes (dry contact)					
Alarms	Salt level too high / low, insufficient water flow (sound can be disabled)					
History	Graphs of main parameters (ORP, pH, energy, salt, temperature)					
Analysis chamber	Yes: separate from the main flow for better durability and measurement accuracy					
Connectivity	Nexus Ready · App, Cloud, OTA					
Pool Terre	Included, must be connected to an earth rod < 20 ohms					
Warranty	Housing 5 years + titanium cell 10 000 h					

Modulyser

THE PRO SALT CHLORINATOR, ULTRA-MODULAR AND DESIGN



For pools up to 110 m³

Automated control *(ORP probe kit optional)*

Installation modularity

Nexus Ready App, Cloud & OTA

Touchscreen

Designed for demanding residential installations, the Modulyser guarantees stable chlorine production for healthy, crystal-clear water. **Its modular format with a remote cell** ensures quick installation and simplified maintenance.

Controlled remotely via the Poolex app, connected to the Cloud and upgradable through OTA updates, it offers smart management of water treatment. With its refined design, textured finishes, touchscreen and LED strip, it combines technical efficiency with tailored elegance.

WARRANTY

- **5 years**: housing + cell (10,000 h)
  excluding wear parts

Refined design



With its clean lines, textured finishes and front colour touchscreen, the Modulyser combines elegance and ease of use.

Its LED strip provides instant readability, while its clever cover hides the connections for a clean, tidy look that blends perfectly into any technical room.

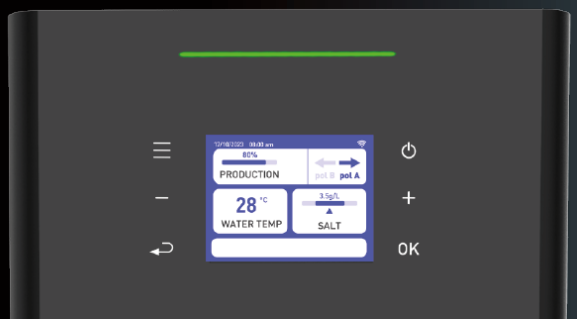



Nexus Ready

Control and monitor your equipment remotely, simply and efficiently.

Adjustable orientation





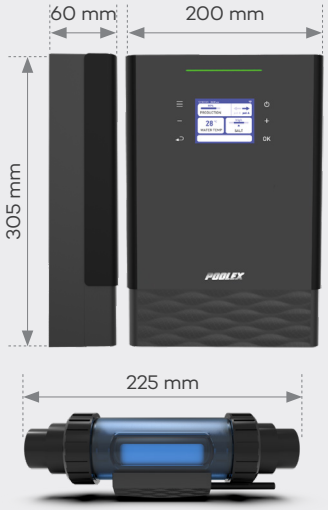



Optional
Probe connects directly to the unit

Ref CL-SORP2

Model	NEW 5	10	15	20	25
Reference	CL-MOD-25	CL-MOD-50	CL-MOD-75	CL-MOD-90	CL-MOD-110
Pool volume	< 25 m³	< 50 m³	< 75 m³	< 90 m³	< 110 m³
Chlorine production	5 g/h	10 g/h	15 g/h	20 g/h	25 g/h
Salinity	From 2.7 to 4.5 ppm				
Modes	3 modes: Flow / Timer / ORP optional				
Cell connection	D50 mm glue-in				
Polarity reversal	Yes, adjustable: 4 / 8 or 12 h				
Cell type	Bipolar cell - 10,000 h				
Probes & sensors	Optional ORP probe / temperature probe				
Features	Circulation pump control (dry contact). Production adjusted according to the cover (dry contact). Multilingual interface. Compatible with optional ORP probe kit.				
Alarms	Salt level too high / low, insufficient water flow				
Water temperature before alarm	15 to 45 °C				
Analysis chamber	-				
Connectivity	Nexus Ready · App, Cloud, OTA				
Touchscreen	2.8" Colour				
Pool Terre	Included, must be connected to an earth rod < 20 ohms (on D50 mm clamp saddle)				
Warranty	5 years: housing + titanium cell 10,000 h				

Neolyser

THE COMPACT, ROBUST AND CLEVER SALT CHLORINATOR



For pools up to 90 m³

Automated control *(ORP probe kit optional)*

Nexus Ready App, Cloud & OTA

Touchscreen rotates 90°

Compact, touch-controlled and connected, this new salt chlorinator offers simple, effective management of water treatment. Designed for **small spaces**, **it can be controlled remotely** via the Poolex app for optimal ease of use.

WARRANTY

- **5 years**: housing + cell (10,000 h)
  excluding wear parts



Up to 55 °C ambient air

Ideal for technical rooms in-ground

The Neolyser features a recyclable expanded polyethylene foam casing, shock-proof and resistant, which effectively protects its components while ensuring optimal durability.



Ultra-robust design



Nexus Ready

Control and monitor your equipment remotely, simply and efficiently.

Rotating display



Removable and rotatable in 90° steps, the display adapts to any configuration for optimal readability, whatever the type of installation.

Models	20	30	50	75	90
Reference	CL-NEO-20	CL-NEO-30	CL-NEO-50	CL-NEO-75	CL-NEO-90
Pool volume	< 20 m³	< 30 m³	< 50 m³	< 75 m³	< 90 m³
Chlorine production	4 g/h	6 g/h	10 g/h	15 g/h	20 g/h
Salinity	From 2.7 to 4.5 ppm				
Modes	8 operating modes, including 3 boost and optional ORP probe				
Cell connection	D50 mm glue-in				
Polarity reversal	Yes, adjustable: 4 / 8 or 12 h				
Cell type	Bipolar cell - 10,000 h				
Probes & sensors	Temperature probe / ORP optional				
Features	Circulation pump control (dry contact). Production adjusted according to the cover (dry contact). Water temperature probe. Flow detector. Optional ORP probe.				
Alarms	Salt level too high / low, insufficient water flow				
Max. ambient T°	55 °C - Hot technical room environments				
History	Graphs of main parameters (Energy, Salt, temperature and ORP (if fitted))				
Analysis chamber	-				
Connectivity	Nexus Ready · App, Cloud, OTA				
LED display	Rotatable (90°) to suit installation direction				
Cell backlighting	✓				
Pool Terre	Included, must be connected to an earth rod < 20 ohms (on D50 mm clamp saddle)				
Warranty	5 years: housing + titanium cell 10,000 h				

Sel In

SALT TREATMENT, COMPACT AND EFFICIENT



Softer water: Low salinity

Ultra-compact

Pool earth included

Easy to install

This **new-generation salt chlorinator** is designed for tight spaces, with electronics built into an **ultra-compact cell**. It features treated titanium plates, guaranteeing **10,000 hours of use**, and **automatic cleaning by polarity reversal**. Its 6 modes, including Boost ++, adapt to the water temperature for optimal operation.

WARRANTY

- **5 years**: housing + cell

Electrolysis cell

The Sel In electrolysis cell is made of ruthenium-coated titanium plates.

This surface treatment improves the efficiency of the electrolysis reaction and ensures the durability of the plates.
In addition, polarity reversal management during production helps limit scaling.

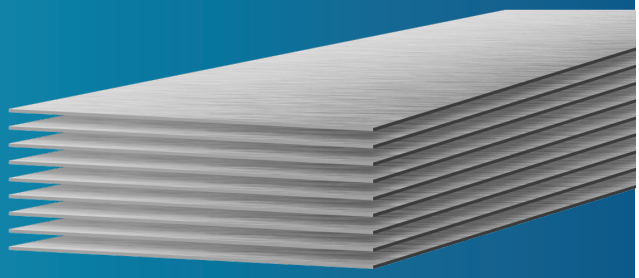

Intuitive use

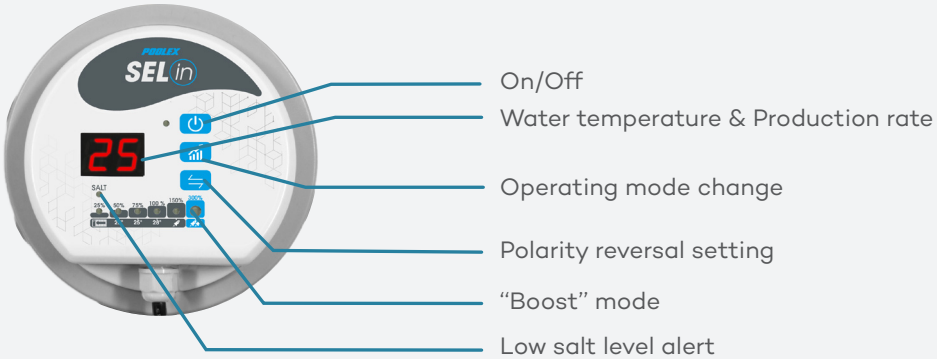

	20	30	50	75	90	120
Reference	CL-SL20	CL-SL30	CL-SL50	CL-SL75	CL-SL90	CL-SL120
Pool volume	20 m^3	30 m^3	50 m^3	75 m^3	90 m^3	120 m^3
Production	4 g/h	6 g/h	10 g/h	15 g/h	20 g/h	30 g/h
Salinity	From 2.7 to 4.5 ppm					
Modes	6 modes: Cover / Spring / Comfort / Summer / Summer+ / Boost ++					
Connection	D50 mm glue-in & 32/38 mm adaptors					
Polarity reversal	yes, adjustable: 4 / 8 or 12 h					
Protection	IPX4					
Cover detection	Manual: reduces production to 20%					
Alarms	Salt level too high / low, insufficient water flow					
Cell orientation	Horizontal or vertical					
Housing dimensions (mm)	125 × 160 × 145			125 × 160 × 190		150 × 160 × 190
Cell dimensions with fittings (mm)	Length 40 cm with fittings - DN 50 mm					
Accessories	**Included:** 2 x 32/38 mm fittings (except SL120) - 2 x 50 mm glue-in fittings - Winterising tube - Cleaning cap - Pool Terre. **Optional:** Multi-position mounting bracket - pH pump.					
Warranty	5 years: housing + cell 10,000 h					
Matching replacement cell reference	CL-SL20L	CL-SL30L	CL-SL50L	CL-SL70L	CL-SL90L	CL-SL120L

NEW

Dosing pumps
Liquid chlorine & **pH**

CONNECTED DOSING



Compatible with pools up to 160 m³

Automatic control & dosing

Nexus Ready App, Cloud & OTA

Easier maintenance

Premium & functional design

Designed for **pools up to 130 m³**, this solution integrates **pH-** and **liquid chlorine (ORP)** dosing pumps that **automatically adjust** treatment to the pool's needs. Connected to the Poolex app and **Nexus Ready** compatible, it simplifies day-to-day water management. **Treatment becomes more precise**: less over-chlorination, better-controlled water and better protection for sensitive equipment such as liners, covers and built-in fittings.

WARRANTY

- **5 years**

pH & LIQUID CHLORINE (ORP)

A pivoting front panel designed for maintenance

With its modern design and pivoting front panel, the pH and Liquid Chlorine dosing pump provides easy access to the tubing and roller.

Maintenance becomes more direct, quicker and more comfortable, for both the user and the installer.



Dosing pumps

pH (potential of hydrogen)

Automatic pH- regulation

Injects pH- corrector when the pH is too high



pH probe installation



ORP (Liquid chlorine)



Smart ORP control

~~Injects li~~quid chlorine according to the measured Redox value



ORP probe installation

	pH	ORP
	12	15
pH pump max flow rate (L/h)	2.4	
Corrective product	pH minus 15% (or more)	Liquid chlorine = Sodium hypochlorite
pH measuring range / (set point)	6.8 - 8.0 / (6.8 - 7.6)	600-800 mV / (450 - 850 mV)
Regulation mode	Proportional (based on pool volume)	
Probe supplied, calibration and warranty	pH probe, D50 mm clamp saddle and pH 7.00 calibration solution supplied	ORP probe, D50 mm clamp saddle and 475 mV calibration solution supplied
Connectivity (Wi-Fi)	Nexus Ready · App, Cloud, OTA	
Alerts and safety features (overdosing, empty container, filtration interlock, notifications)	- Insufficient flow (flow detector supplied, no filtration interlock as too risky) - Temperature error - Empty container detection - Stop if overdosing has no effect - Recalibration reminder	
Max. pool volume	130 m³	
Box dimensions (mm) and IP rating	Approx. 190 × 100 × 155 - IPX4	

Specifications are subject to change; please refer to the latest product data sheet.



THE 2027 RANGE

MULTICHANNEL

HEAT PUMPS
FILTRATION - TREATMENT
POOLICAN


POOLEX
POOLEX
Quasar X
Poolex

THE 2027 RANGE

MULTICHANNEL

HEAT PUMPS



NEW

Jetline Selection FI

R290

HIGH PERFORMANCE & DIRECT SOLAR POWER

8 | 10 | 12 | 15 | 20 | 20 Tri | 27 Tri kW (at 26/26)

Up to 135 m³

For ⊕ info, scan

All the performance of a **Class A Full Inverter heat pump**, connected and running on the natural refrigerant R290. **Connected directly to your solar panels**, with no inverter, it harnesses solar energy to heat a pool with just 3 panels*.

*To be confirmed depending on use case and power.

PV Ready

SELF-SUFFICIENCY WITH 3 SOLAR PANELS

A direct connection to the solar panels, with no intermediate inverter:

- ✓ **Direct connection** to the solar panels
- ✓ **No intermediate** inverter
- ✓ **Solar self-sufficiency** with 3 panels*
- ✓ **Automatic switchover** to the mains grid
- ✓ **Smart Control box** with consumption monitoring

A solution that prioritises solar energy to reduce grid electricity consumption, with no complex installation, while ensuring continuous heating when sunshine decreases.



SMART GRID READY

Smart energy management

Smart adaptation of the heat pump's operation to the availability of electrical energy, for better-controlled consumption.



5" touchscreen with Smart Control

Temperatures and modes in a single touch, **solar / heat pump / grid split** and consumption history.

Class A
SCOP > 7, optimised energy efficiency

Eco-responsible R290 gas
Global warming potential GWP 0.02

Full Inverter technology
up to 35% energy savings

WARRANTY

- **3 years**: heat pump

Poolex connectivity

Real-time control, scheduling and monitoring **remotely via the Poolex app.**





NEW

Silverline Top

R290

ELEGANT DESIGN AND INSTALLATION FLEXIBILITY

6 | 9 | 12 | 15 | 15 Tri kW (at 26/26)

Up to 150 m³

For info, scan

PREMIUM DESIGN

Aluminium front panel

An elegant look and neat integration.



TOUCHSCREEN + BUILT-IN WI-FI

Simple & connected control

Adjust your heat pump directly **from its touchscreen** or remotely **with the Poolex app**.



VERTICAL AIR DISCHARGE

The vertical fan blows air upwards to reduce installation constraints around the heat pump.

- ✓ Smaller footprint
- ✓ Ideal for tight spaces
- ✓ Easier integration near the pool



WARRANTY

- **3 years**: heat pump

Class A
SCOP > 7, optimised energy efficiency

Premium & durable design
Aluminium front panel, elegant look and neat integration

Eco-responsible R290 gas
Global warming potential GWP 0.02

Poolex connectivity
Remote control via the Poolex app



NEW

Silverline Fi

R290

FULL INVERTER PERFORMANCE, CONNECTED AND RESPONSIBLE

8 | 10 | 12 | 15 | 20 | 20 Tri | 27 Tri kW (at 26/26)

Up to 135 m³

For info, scan

PREMIUM DESIGN

An elegant look

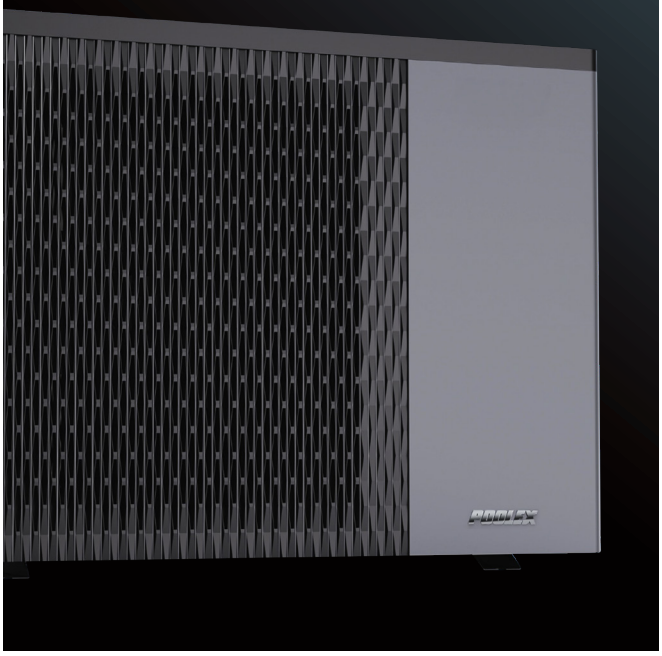



Poolex connectivity

Real-time control, scheduling and monitoring **remotely via the Poolex app**.

R290

R290 refrigerant: a more environmentally friendly choice

By using the natural gas R290, this range significantly reduces its environmental impact, with an extremely low global warming potential (GWP = 0.02).

WARRANTY

- **2 years**: heat pump



Modern 4” display: colour & touch

A modern, intuitive interface offering simple, comfortable control, with quick access to temperatures and settings for easier day-to-day management.

Class A
SCOP > 7, optimised energy efficiency

Full Inverter technology
up to 35% energy savings

Eco-responsible R290 gas
Global warming potential GWP 0.02

Poolex connectivity
Remote control via the Poolex app

NEW

R290

NANO & NANO Fi



THE LEGEND CONTINUES.

CONNECTED, R290

AND STILL JUST AS NANO.

3 | 5 kW (at 26/26)

Up to 25 m³

NANO
For ⊕ info, scan

NANO Fi
For ⊕ info scan



R290 and still just as NANO !

Thanks to the natural refrigerant R290, this new generation significantly reduces its environmental impact (GWP = 0.02), while keeping the same ultra-compact dimensions as the previous R32 generation.

Reversible Heating / Cooling

Particularly exposed to temperature variations, small pools can quickly reach high temperatures during heatwaves.

The Nano R290 provides both heating and cooling of the water, limiting the risk of overheating and helping to protect pool linings, especially liners, as well as the effectiveness of water treatments. In automatic mode, it adapts its operation to maintain the set temperature.

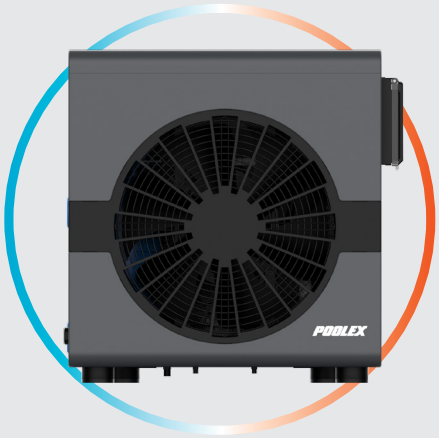



Poolex connectivity

Real-time control, scheduling and monitoring **remotely via the Poolex app**.

DEFROSTING AUTOMATIC

The Nano R290 features an automatic defrosting system that limits frost build-up on the exchanger, preserves heating performance and ensures efficient operation, even when outside temperatures drop.



NANO Fi
Full Inverter
Up to 35% energy savings

Eco-responsible R290 gas
Global warming potential GWP 0.02



SILVERLINE TOP

ELEGANT DESIGN AND FLEXIBLE INSTALLATION

6 | 9 | 12 | 16 | 16 Tri | 20 | 20 Tri | 25 Tri | 30 Tri kW (at 26/26)
Up to 120 m³

- Poolex connectivity
- Full Inverter technology
- CLASS A performance
- R32 refrigerant

WARRANTY 2 YEARS

For info, scan



SILENT MAX

SO QUIET YOU'LL FORGET IT'S THERE

8 | 12.5 | 15 kW (at 26/26)
Up to 85 m³

- Poolex connectivity
- Full Inverter technology
- R32 refrigerant

WARRANTY 2 YEARS

For info, scan



SILVERLINE

PERFORMANCE AT AN UNBEATABLE PRICE

5.5 | 7 | 9 | 12 | 15 kW (at 26/26)
Up to 85 m³

- ON / OFF
- Poolex connectivity
- R32 refrigerant

WARRANTY 2 YEARS

For info, scan



While stocks last

JETLINE SELECTION FI

THE NEW-GENERATION JETLINE

7 | 8.5 | 12 | 15 | 15 Tri | 18 | 18 Tri | 30 Tri kW (at 26/26)

Up to 110 m³

Poolex connectivity

Full Inverter technology

R32 refrigerant

WARRANTY 2 YEARS

For info, scan



While stocks last

SILVERLINE FI

THE UNBEATABLE FULL INVERTER

7 | 9 | 12 | 15 | 15 Tri | 20 | 20 Tri | 30 Tri kW (at 26/26)

Up to 110 m³

Poolex connectivity

Full Inverter technology

R32 refrigerant

WARRANTY 2 YEARS

For info, scan



REMEMBER TO CARRY OUT A HEAT LOSS ASSESSMENT

The treatable water volumes stated for our pool heat pumps are indicative maximum estimates, based on favourable conditions and geographical areas. To ensure optimal efficiency, a precise heat loss assessment is essential; it will determine the power required for the specific features of each installation.

THE 2027 RANGE

MULTICHANNEL

FILTRATION PUMPS

FILTRATION PUMP



NEW

ONDULINE X

MULTI-SPEED PUMP

1.5 HP | 2 HP

- Programmable variable speed via the Poolex app
- Energy savings
- Compatible with all treatments
- Wi-Fi connection

WARRANTY
2 YEARS

For ⊕ info, scan

VARIABLE

A programmable variable-speed pump: 3 adjustable speeds from 800 to 3400 rpm.

CONTROLLABLE

Remotely controlled filtration: time scheduling, speed selection and control from the Poolex app.

COMPATIBLE

Designed for both new builds and retrofits, its (optional) fittings are compatible and make it easy to integrate into existing installations.

ECONOMICAL

Runs from 110 W at low speed for low consumption.



While stocks last



ONDULINE

THE VARIABLE FILTRATION PUMP WITH MANUAL SELECTION

1.5 HP

- 3 adjustable speeds
- Energy savings
- Compatible with all treatments
- Quiet < 45 dB

WARRANTY
2 YEARS

For ⊕ info, scan

While stocks last



TONICLINE

THE ECONOMICAL, HIGH-PERFORMANCE SINGLE-SPEED FILTRATION PUMP

0.5 HP | 0.75 HP | 1 HP | 1.5 HP

- Flow rate up to 19 m^3/h
- Self-priming pump
- Compatible with all treatments
- Compact dimensions

WARRANTY
2 YEARS

For ⊕ info, scan

THE 2027 RANGE

MULTICHANNEL

FILTRATION



FILTRATION UNIT

BLUE SILK

FOR ABOVE-GROUND POOLS

Up to 3 m³/h

WARRANTY
2 YEARS

For ⊕ info, scan



FILTER MAX

BALL FILTRATION

From 4.8 m³/h to 10 m³/h

WARRANTY
2 YEARS

For ⊕ info, scan



Optimax



Hose



3-way valve



Hose clamp

Reference	Description
PF-OPTIBALL700C	Optimax Balls – 700 g (equivalent to 25 kg of sand)
PF-OPTIMAXC	100 g ball cartridge – type A filter replacement
PF-FILTERTUYAU8	Universal 8 m replacement hose - can be cut to length - Ø 38 mm – Intex/Bestway compatible
PF-FILTERVANNE3	3-way screw-on shut-off valve (Intex/BW/Ø 50 mm compatible)
PF-FILTERCOLLIER32	Pack of 2 universal Ø 32 mm hose clamps
PF-FILTERCOLLIER38	Pack of 2 universal Ø 38 mm hose clamps





SAND FILTER

OPTI TOP & SIDE

INNOVATIVE DESIGN & SUPERIOR EFFICIENCY

- Flow rate up to 19 m³/h
- 3 TOP versions & 4 SIDE versions
- For pools up to 115 m³
- Recyclable HDPE tank
- 6-way valves

WARRANTY
2 YEARS
EXCLUDING SEALS - PLUGS
5 YEARS
TANK

For ⊕ info, scan



SINGLE-CARTRIDGE FILTER

NETFLUX

FOR ULTRA-CLEAR, TOP-QUALITY WATER

- Flow rate up to 23 m³/h
- 4 versions available
- For pools up to 50 m³
- Ultra-fine filtration down to 15 microns
- Water saving

WARRANTY
2 YEARS
EXCLUDING SEALS - PLUGS
5 YEARS
TANK

For ⊕ info, scan





Multi-position bracket included

WARRANTY
2 YEARS

For ⊕ info, scan

SALT CHLORINATOR

TURBO SALT

ULTRA-COMPACT SALT DISINFECTION

Up to 80 m³

Replacement cells	
CL-TS100L	Replacement cell for Poolex Turbo Salt TS100
CL-TS200L	Replacement cell for Poolex Turbo Salt TS200
CL-TS300L	Replacement cell for Poolex Turbo Salt TS300
CL-TS400L	Replacement cell for Poolex Turbo Salt TS400
CL-TS600L	Replacement cell for Poolex Turbo Salt TS600
CL-TS800L	Replacement cell for Poolex Turbo Salt TS800
Accessories	
CL-TSLFIX	Mounting bracket for Poolex Turbo Salt / Sel-In salt chlorinator
CL-POOLTERRE50	Pool Terre - Earthing kit for D50 PVC pipe
CL-TSLCAP	Maintenance cap for Poolex Turbo Salt / Sel-In salt chlorinator
CL-TSLTUBE	Winterising tube for Poolex Turbo Salt / Sel-In salt chlorinator

DOSING PUMP

PUMP pH

THE STANDALONE UNIT THAT MAINTAINS YOUR POOL'S pH LEVEL

Up to 65 m³



WARRANTY
2 YEARS

For ⊕ info, scan

Poolican®

THE CONNECTED 5-IN-1 POOL MANAGER!



POOL < 25 m³

Built-in reversible Full Inverter heat pump	Remote control	Complete & compact technical room	Above-ground & in-ground pools up to 25 m³	Lighting control

Circulation | Filtration | Heating | Treatment | Lighting



The Poolican brings together the three essential elements for clean, healthy water: **a circulation pump**, an efficient **cartridge filter** and a **salt chlorinator** for disinfection.

And Poolex goes even further by integrating a 4th element essential to your comfort: **a reversible Full Inverter heat pump** ensuring the perfect water temperature for swimming.

The technical room 2.0

Simplified maintenance
Automatic regulation of water circulation

Crystal-clear water
High-performance cartridge filtration system

Healthy, balanced water
Automatic salt electrolysis treatment

The ideal temperature all season long
5 kW Full Inverter & reversible heat pump

Lighting control



CONTROL, SCHEDULE AND MANAGE THE POOL

Manage your Poolican in just a few clicks from a Wi-Fi connected smartphone.



NEXUS READY

POOLEX APP CONTROL

WI-FI CONNECTION

Compatible





GENERAL	
Reference	PC-POOLICAN-2GD
Pool volume	25 m³
Power supply	220-240 V~50 Hz
Max. power	1.25 kW
Fittings	1"1/2 + 32 / 38 mm
Product dimensions	805 × 405 × 595 mm
Noise level at 10 m	≤ 35 dB
LED lighting	12Vdc 60 W max.
Warranty	2 years

CIRCULATION	
Flow rate	5.5 m³
Power	140 W

FILTRATION
D127 x H235 antibacterial filter
Pureflow optional

Included

Standardised installation kit



RCD socket



Pre-filter



Non-return valve

5KW HEAT PUMP		
Air 26 °C / Water 26 °C	**Capacity**	5 kW
	Power consumption	0.91 kW
	COP	5.5
Temperature range		15 / 40 °C
Operating range		-7 / 43 °C
Refrigerant		R32
Compressor type		Rotary
Functions		Heating / Cooling / Auto

SALT CHLORINATOR	
Salinity	3.5 g/l
Max. production rate	5 g/l
Cell cleaning	Polarity reversal
Operating modes	2 modes: normal and boost

POOL EXTRAS

FIRE PROTECTION MOTOR PUMP
SHOWERS - AQUAFITNESS









PoolSam

FIRE AND FLOOD PROTECTION

Pools take on a whole new mission!

PoolSam is an **emergency device** that lets you use **your pool water** to **put out small fires**, or contain a fire while waiting for the fire department. **The average pool volume is equivalent to 4 to 5 Canadairs**, a substantial reserve you can rely on.





Fire hose with adjustable flow and spray.

Two operating modes:

ATTACK: a straight, focused jet to**stop a small fire at the source.**

DEFENSE: a wider, more diffused spray designed to **shield against heat and smoke.**

Wide operating range

Spray distance **up to 50 m around** the pool: 25 m hose + 25 m water jet.



Also doubles as a drainage pump.

In case of flooding, **quickly remove water using the Flood Protection Kit**, available as an option, including **a 7 m suction hose for hard-to-reach flooded spots** and a **weighted strainer to reach the bottom and filter debris.**





POOLSAM	
Reference	PS-POOLSAM
Start	recoil starter
Capacity	16 m³/h
Jet length	Up to 25 m
Combustion engine	4-stroke – 7 HP
Fuel	Unleaded petrol SP95 – E10
Oil	10W30 or 10W40 or 15W30 or 15W40
Tank capacity	3.6 L
Weight	45 kg
Pump outlet pressure after 25 m hose	7 bar

Included accessories for PoolSam and PoolSam E-START


1 funnel


1 GFR fitting spanner


1 spark plug spanner


1 x 3 m rigid PVC suction hose


Suction strainer


Suction hose connection kit


Storage cover

With starter electric

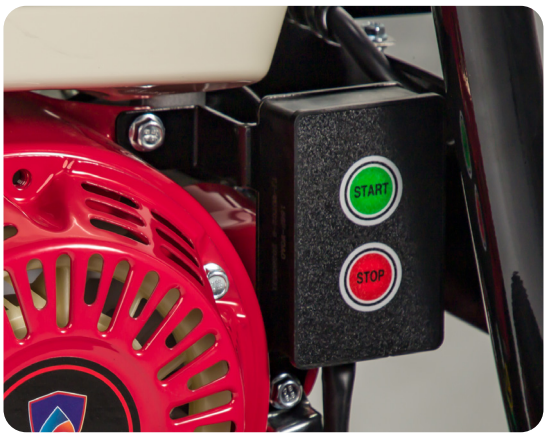

12 V lithium-ion battery
for **easy starting** at the touch of the **START button.**



POOLSAM E-START	
Reference	PS-POOLSAM2
Start	Start & Stop button with 12 V lithium-ion battery
Capacity	16 m³/h
Jet length	Up to 25 m
Combustion engine	4-stroke – 7 HP
Fuel	Unleaded petrol SP95 – E10
Oil	10W30 or 10W40 or 15W30 or 15W40
Tank capacity	3.6 L
Weight	45 kg
Pump outlet pressure after 25 m hose	7 bar

Optional accessories for both models



Starter kit
with hand crank

Reference	PS-HANDLE1



25 m hose extension

Reference	PS-EXT250



Flood protection kit
7m suction hose – Dirty water strainer

Reference	PS-FLOODKIT1



SOLAR SHOWERS

Poolex designs outdoor solar showers where comfort, style and eco-responsibility enhance every setting.



SHOWERS **HDPE**



Cobra



So Happy



Happy 4x4



Happy Go

SHOWERS **ALUMINIUM**



Jolly



Jolly Go



NEW Spring



NEW Spring go

SHOWERS **HYBRID**



Dada Straight



Dada Più



Dada Curve

Dada Più

THE FLAGSHIP MODEL

Hybrid technology

Built-in hand shower

Capacity 40 L

Aluminium shower

Poolex reintroduces its flagship model, the Dada Più. Combining Poolex's hybrid technology with a 40 L capacity, it delivers reliably warm showers for every user while harnessing solar energy. Premium stainless steel controls, an adjustable shower head and a hand shower make it a truly outstanding piece.



Built-in rainfall shower head





HYBRID TECHNOLOGY

Poolex hybrid technology ensures you enjoy a hot shower all year round, whatever the weather.

Solar connection: connect the shower to a cold water supply heated naturally by the sun.

Domestic connection: add a hot water supply for optimal comfort all year round.

Both systems can be used separately for maximum flexibility.

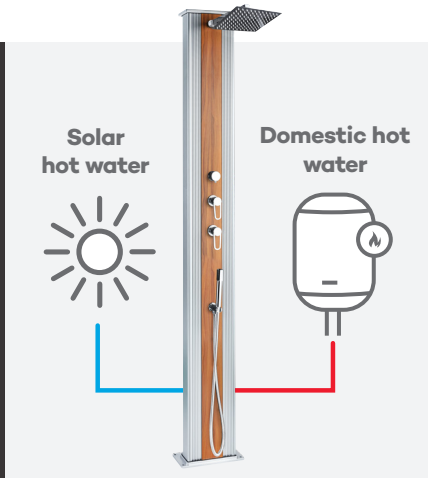



Reference	DS-D463AW
Materials	Aluminium
Weight	10 kg
Height	228 cm
Capacity	40 L
Base dimensions	14 × 32.4 cm
Fixing kit	Included
Warranty	2 years

Dada Straight

TIMELESS ELEGANCE

Capacity 40 L

Aluminium shower

Hybrid technology

Built-in hand shower

Poolex has updated its flagship model**, the Dada**. Available in both straight and curved designs, it **combines Poolex's eco-friendly solar technology** with a 40 L capacity and hot water connection, delivering showers at the perfect temperature for every user.



Built-in rainfall shower head



Chrome mixer laser-engraved

References	DS-D463NX	DS-D463AX
Materials	Aluminium	
Weight	10 kg	
Height	228 cm	
Capacity	40 L	
Base dimensions	14 × 32.4 cm	
Fixing kit	Included	
Warranty	2 years	

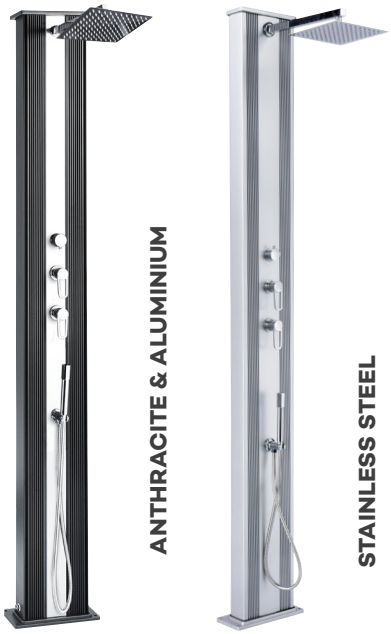

NEW

Spring

CONTEMPORARY & STYLISH

Capacity 33 L

Solar energy

Foot rinse included

Elegant & timeless design

The Spring solar shower in aluminium blends beautifully into any outdoor space. **Its 33 L tank naturally heats in the sun,** providing a 100% eco-friendly solution. **Elegant and lightweight**, it easily connects to any water supply.



Available in 5 colours





References	DS-A143NO	DS-A143VS	DS-A143TC	DS-A143WS	DS-A143MB
Colours	Anthracite	Sage green	Terracotta	Wood finish	Marble finish
Materials	Aluminium				
Weight	13.5 kg				
Height	230 cm				
Capacity	33 L				
Base dimensions	27 x 12 cm				
Fixing kit	Included				
Warranty	2 years				

NEW

Spring go

COMPACT & ELEGANT

Capacity 22 L

Solar energy

Foot rinse included

Removable hand shower

The Spring solar shower, crafted from aluminium, blends seamlessly into any outdoor space. **Its 22 L tank is naturally heated by the sun,** providing a 100% eco-friendly solution. **Elegant and lightweight**, it connects easily to any water supply.



Available in 3 colours

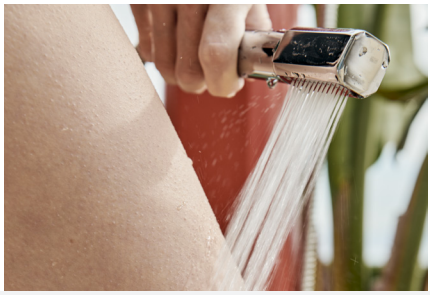

Removable hand shower



References	DS-A154NO	DS-A154WS	DS-C720NO
Colours	Anthracite	Wood finish	Marble finish
Materials	Aluminium		
Weight	9.5 kg		
Height	130 cm		
Capacity	22 L		
Base dimensions	30 x 34 cm		
Fixing kit	Included		
Warranty	2 years		

Dada Curve

REFINED CURVES AND UNDERSTATED ELEGANCE

Capacity 40 L

Hybrid technology

Curved design

Aluminium shower

Also available in a curved version, **Dada Curve stands out with its defined curves and ultra-flat, square mirror-effect shower head**. Its elegant arc allows it to blend effortlessly into any garden, adding a touch of designer style.



Built-in rainfall shower head



Chrome mixer laser-engraved

References	DS-D363NO	DS-363NX
Materials	Aluminium	
Weight	10 kg	
Height	228 cm	
Capacity	40 L	
Base dimensions	14 × 32.4 cm	
Fixing kit	Included	
Warranty	2 years	



ANTHRACITE & ALUMINIUM



ANTHRACITE

Jolly

MODERN & FUNCTIONAL

33 L capacity

Solar energy

Foot rinse included

Easy installation

The Jolly solar shower blends beautifully into any outdoor space. **Made from aluminium**, this designer piece comes in two colours. Solar energy alone is enough to heat **the Jolly's 33 L tank**. As a result, it is **fully eco-friendly** and connects easily to any water supply.



Foot rinse included



Blends seamlessly into any outdoor space

References	DS-A822NO	DS-A822NX
Materials	Aluminium	
Weight	11 kg	
Height	233 cm	
Capacity	33 L	
Base dimensions	16 × 18 cm	
Fixing kit	Included	
Warranty	2 years	



Jolly Go

SOLAR SHOWER & WATERING STATION

Capacity 20 L

Solar energy

Aluminium shower

Removable hand shower

The new Jolly Go solar shower is perfect for those seeking a discreet solar shower that doesn't compromise on capacity, convenience or design. Featuring a powder-coated aluminium body **in a choice of six colours,** Jolly Go comes with a foot rinse, mixer tap and a handheld shower head with hose, allowing you to rinse your body easily without wetting your hair.



Available in six colours

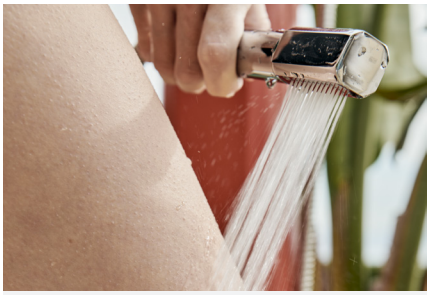

Removable hand shower



References	DS-JG141-6011	DS-JG141NX	DS-JG141-6027	DS-JG141-3016	DS-JG141NO	DS-JG141-5019
Colours	Reseda green	Aluminium	Opaline green	Terracotta	Anthracite	Capri blue
Materials	Aluminium					
Weight	5.5 kg					
Height	120 cm					
Capacity	20 L					
Base dimensions	16 × 18 cm					
Fixing kit	Included					

Cobra

A UNIQUE DESIGN!

Capacity 32 L

Solar energy

Foot rinse included

Bold, colourful design

A design that com**bines sleek contours and reptilian details.** This solar shower becomes a true centrepiece for your outdoor space. **Fitted with a rain-effect adjustable shower head, mixer tap and stainless steel foot rinse,** it is also eco-friendly thanks to **its 32 L HDPE shower body** which harnesses solar energy to ensure water at just the right temperature.







References	DS-C720BL	DS-C720VE	DS-C720NO	DS-C720RS
Colours	Blue	Green	Anthracite	Pink
Materials	HD polyethylene			
Weight	9.5 kg			
Height	217 cm			
Capacity	32 L			
Base dimensions	30 × 34 cm			
Fixing kit	Included			
Warranty	2 years			

So Happy

LARGE CAPACITY & ELEGANCE

Capacity 28 L

Solar energy

Foot rinse included

Bold, colourful design

A true bestseller since its launch, Happy is now reinvented as So Happy, featuring **a more contemporary design, increased capacity, and above all new finishes** that make So Happy even more appealing.



Foot rinse included



Colourful design

References	DS-H221NO	DS-H221BL	DS-H221VE
Colours	Anthracite	Blue	Green
Materials	HD polyethylene		
Weight	6 kg		
Height	216 cm		
Capacity	28 L		
Base dimensions	24 × 26 cm		
Fixing kit	Included		
Warranty	2 years		



Happy 4x4

CAPACITY & REFINED ELEGANCE

Capacity 44 L

Solar energy

Foot rinse included

Bold, colourful design

The Happy 4x4 sol**ar shower offers the largest capacity in its range** with a 44 L tank heated by the sun—100% eco-friendly.**Made from high-density polyethylene,** its curved, elegant design comes in four colours to suit any outdoor space. Easy to connect, with a flared base for enhanced stability and effortless installation.









References	DS-H422NO	DS-H422BL	DS-H422VE	DS-H422RS
Colours	Anthracite	Blue	Green	Pink
Materials	HD polyethylene			
Weight	7.5 kg			
Height	229 cm			
Capacity	44 L			
Base dimensions	26 × 29 cm			
Fixing kit	Included			
Warranty	2 years			



Happy Go

LOW HEIGHT & LARGE CAPACITY

Capacity 23 L

Solar energy

Blends easily into your garden

Bold, colourful design

The Happy Go solar shower combines a compact design with large capacity. Supplied with a removable hand shower, **it is simple and enjoyable to use. 100% environmentally friendly, the sun's warmth is all you need to heat its 23 L tank.** Easy to fit to any water supply. Made from HD polyethylene, the Happy Go comes in anthracite or blue.







References	DS-HG142NO	DS-HG142BL
Colours	Anthracite	Blue
Materials	HD polyethylene	
Weight	6.5 kg	
Height	120 cm	
Capacity	23 L	
Base dimensions	26 × 29 cm	
Fixing kit	Included	
Warranty	2 years	

Shower platform

RECYCLABLE OUTDOOR SHOWER PLATFORM

Long-lasting durability

Premium materials

Compatible with all Poolex showers

Perfect before and after swimming, after the beach or a workout, this Poolex outdoor solar shower brings a refreshing break. For the best experience, it's recommended to stand firmly on the slatted platform so you can enjoy the water without soaking your feet.

The Poolex slatted shower mat is a genuine asset for your outdoor shower setup. Available in D**ark Coffee or Dark Grey, it blends s**eamlessly with the atmosphere of your outdoor space.

It installs quickly on any flat surface, efficiently draining away water. Its well-planned 75 × 97 cm dimensions provide a stable space for rinsing off with ease.

Its composite design makes this platform resistant to UV and outdoor conditions. There's no need for seasonal maintenance; it doesn't harbour mould and won't warp. That means more time to enjoy your solar shower area, less time on upkeep!

- 100% recyclable
- UV resistant
- Withstands temperatures from -30°C to 70°C
- Water and mould resistant
- Termite resistant
- Easy to install, no adhesive required

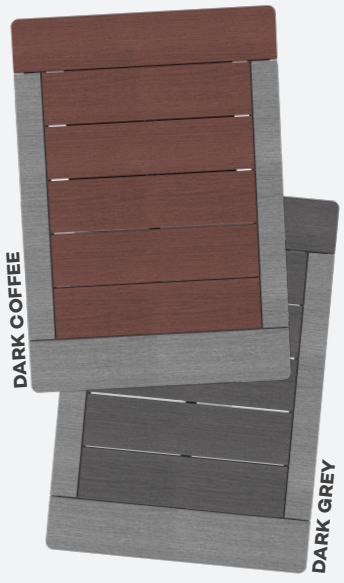

Waterflex

Water Fitness Expert



AQUABIKES

Waterflex offers turnkey concepts to help you diversify your activities with a cheerful spirit.

ALUMINIUM MULTICHANNEL RANGE

WR MAX



WR3 AIR



WR4 AIR



WR5 AIR



PRO RANGE

LANABIKE EVO



FALCON AIR



ELLY AIR



STAINLESS STEEL MULTICHANNEL RANGE



WR3



WR5

Falcon Air

THE MOST COMPLETE POOL BIKE



TRAINING TYPE:
MUSCLE STRENGTHENING

Ultra-light, easy to remove from the pool

Fully-equipped aquabike

ADS dual-speed pedals

Corrosion-resistant

The most comprehensive aquabike

This sport edition is designed for those who want to combine cardio training with muscle strengthening. **Built for intensive use in both chlorinated and salt water,** making it ideal for fitness or aquatic rehabilitation.

WARRANTIES

- **2 years**: Metal parts
- **6 months**: Wear parts

AQUAPALM SYSTEM

4 INTENSITY LEVELS

The Falcon Air Aquapalm system features **four blades to boost performance.** Their cup-shaped design increases contact with the water, enhancing resistance.**This hydraulic resistance system can be easily adjusted by the user,** even while seated, simply by rotating each blade.



FOR ALL BUILDS AND ANY POOL





SPORT+ PACK INCLUDED



Training bar



Comfort saddle



Insulated bottle



Bottle holder

Reference	WX-FALC4A
Quality	T6 tech aluminium
Min. closed size	L 94 × W 55.5 × H 115 cm
Max. open size	L 114.5 × W 55.5 × H 152 cm
Weight	15.8 kg
Water depth	1.10 m to 1.50 m
Warranties	2 years metal parts 6 months wear parts

SETTINGS

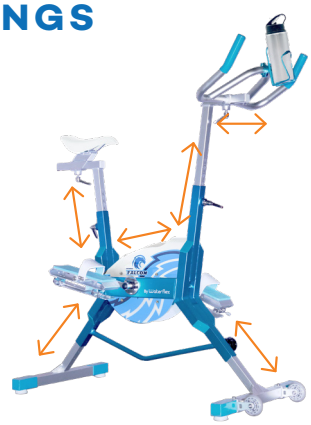

Lanabike EVO

Exclusive store

THE POOL BIKE THAT MAKES FITNESS FUN



TRAINING TYPE:
WELLNESS / FITNESS

Ultra-light, easy to remove from the pool

Perfect for toning your figure

ADS dual-speed pedals

Easy adjustment system

With the Lanabike Evo, **Waterflex is reinventing at-home pool aquabiking.** Its innovative **Aqua Double Speed pedal system delivers tailored hydraulic resistance for cardio exercise while protecting your joints.** Featuring an anodised aluminium frame and a comfort saddle, Lanabike Evo is an easy-to-use aquabike for anyone looking to get the most from their pool and stay in shape.

WARRANTIES

- **2 years**: Metal parts
- **6 months**: Wear parts

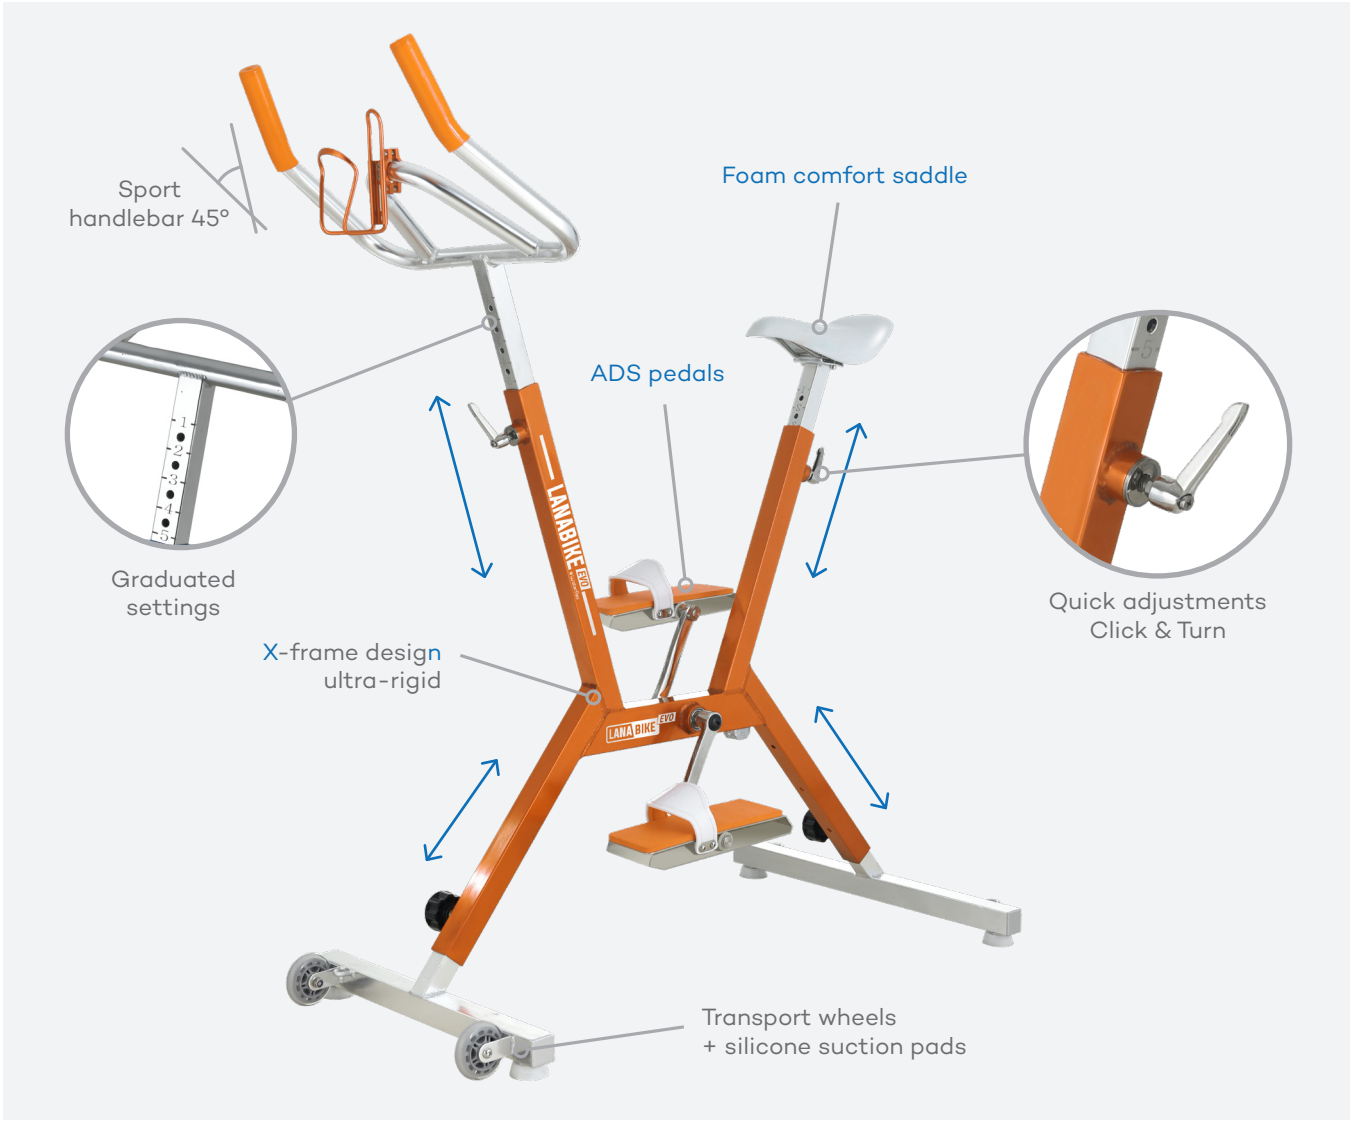

AQUA DOUBLE SPEED PEDALS

Made from **aluminium,** the ADS pedals feature a fold-out, hinged flap. It unfolds and locks in one smooth movement and **increases hydraulic resistance by 54%.** This lets you ramp up your cardio workout.

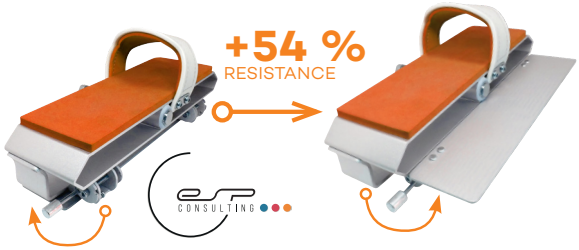

Reference	WX-LANA2-OR
Quality	T6 tech aluminium
Anodising	25 µm
Min. closed size	L 101 x W 60 x H 116 cm
Max. open size	L 116 x W 60 x H 151 cm
Weight	11.4 kg
Water depth	1.10 m to 1.60 m
Warranties	2 years metal parts 6 months wear parts

INCLUDED ACCESSORIES



Insulated bottle

Comfort saddle

Bottle holder

ELLIPTICAL BIKE

Elly Air

NORDIC WALKING FOR POOLS



The Elly aquatic elliptical trainer **is a complete workout machine** favoured for group aquatraining classes. Instructors will appreciate offering a session that **engages every muscle group**— thighs, calves, glutes, core, arms and shoulders. Users will love **its intuitive operation.**

Reference	WX-ELLY-AIR
Quality	T6 tech aluminium
Resistance	Oscillating lever arms with perforated blades + hydraulic resistance
Settings	Yes, adjustable
Dimensions	L 117.5 x W 55.5 x H 178.5 cm
Weight	23 kg
Water depth	1.10 to 1.50 m
Warranty	• **2 years**: Metal parts • **6 months**: Wear parts

RESISTANCE HYDRAULIC

The Elly Air's hydraulic resistance is based on a clever system of fins, inspired by a water mill.

This mechanism harnesses the water's movement to create resistance directly proportional to the intensity of your effort.

The faster or harder you work, the greater the resistance becomes, allowing for a progressive and adaptable workout.



My Aqua Fit

THE 4-IN-1 SMART KIT FOR AQUABIKING!

Track **your performance in real time** on the screen, and **see your stats** at a glance. With its **waterproof case**, your phone stays protected, so you can join live events on **Zwift** or sync your sessions to **Strava**. You can even follow a video aquabike class if you like!

28 hours of battery life

IP67 waterproof

Bluetooth 5.0

Compatible with Strava & Zwift

A CONNECTED TOOL

Sensor data from your aquabike is collected and **displayed on your smartphone via a waterproof w**ired connection, using a free app.

With the app, you can view your data either on your smartphone or on a handlebar-mounted cycle computer. This gives you all the feedback you need to guide your workout.

- **Accurate workout tracking to boost** performance
- **Heart rate analysis via che**st strap monitor
- **Calorie burn tracking**
  See how effective your workout is
- **Compatible with Strava and Zwift apps**
  Share your results with friends
- **Waterproof case** for smartphone included

INCLUDED IN THE PACK



Sensor +



Heart rate monitor armband +



Revolution counter +



Waterproof phone case

WR air max

THE SPORT+ POOL BIKE



Ultra-light, easy to remove from the pool

Fully-equipped aquabike

ADS dual-speed pedals

Corrosion-resistant

The most comprehensive aquabike

This sporty version is designed for those seeking both cardio training and muscle strengthening. **It is built for intensive use in both chlorinated and salt water,** making it perfect for fitness or aquatic rehabilitation.

WARRANTIES

- **2 years**: Metal parts
- **6 months**: Wear parts

THE ATHLETIC AQUABIKE!

This MAX aquabike features a sleek design and ergonomic comfort premium combines performance and lightness.

It combines the power of its 5-blade propeller (fixed hydraulic resistance) with variable-resistance pedals for a dual-intensity workout. Perfect for cardio and muscle strengthening exercise. Its marine-grade 6063 T6 anodised aluminium frame keeps the weight to just 15.9 kg.

Handling and pool removal are lighter and easier. Its sacrificial anode enhances protection, making it suitable for all types of water. You'll appreciate barefoot comfort, smooth pedalling and powerful resistance.

FIXED RESISTANCE WITH 5 BLADES



ADVANTAGES



- Hydraulic resistance
- Draining effect
- Adjustable seat & handlebars in height and depth
- Aqua double speed pedals

ENDURO

ANODISED ALUMINIUM

IDEAL FOR PRIVATE POOLS & PUBLIC POOLS

ENERGY EXPENDITURE
312 - 468 kcal/h



AQUA PEDALS DOUBLE SPEED

ERGONOMICS FOR EVERYONE AND EVERY POOL.

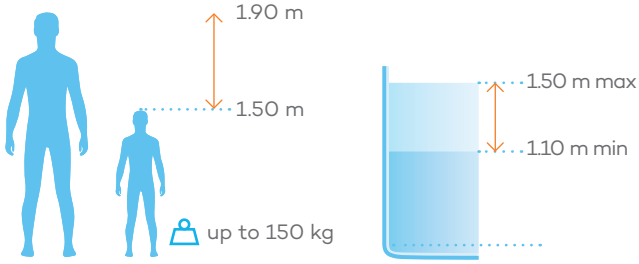

INCLUDED ACCESSORIES



Bottle insulated

Door bottle

Saddle sport

Reference	WX-WRmax1
Quality	Aluminium Tech T6
Finish	Anodising
Min. closed size	L 101 x W 56 x H 118 cm
Weight	16 kg
Water depth	1.10 m to 1.50 m
Warranty	**2 years** metal parts **6 months** wearing parts

WR Air Range

By choosing aluminium, the WR Air range becomes lighter while staying true to its core value: **helping coaches and athletes personalise their training.** The anodised aluminium frame reduces the weight of WR Air aquabikes, making them easier to move, yet retains strength and rigidity to ensure stable, effective sessions for both muscle building and cardio.

WR3 AIR

CARDIO | ENDURO | SPINNING



RESISTANCE
HYDRAULIC

gentle resistance

WR4 AIR

CARDIO | ENDURO | SPINNING



RESISTANCE
HYDRAULIC

4 adjustable blades



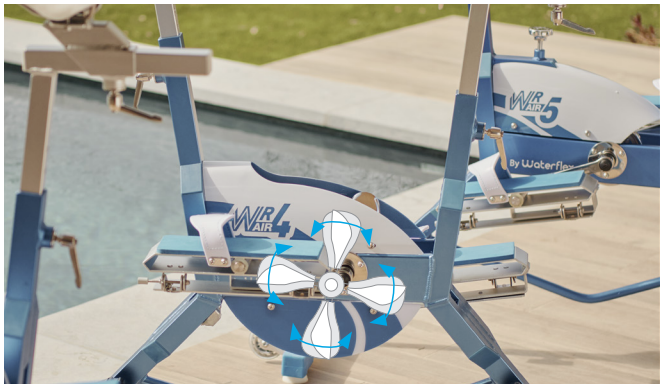



RESISTANCE
FIXED HYDRAULIC

ANODISED ALUMINIUM

IDEAL FOR PUBLIC POOLS

ENERGY EXPENDITURE
312 - 492 kcal/h



AQUA PEDALS DOUBLE SPEED

WR5 *AIR*

CARDIO | ENDURO | SPINNING

CONTINUOUSWATER RESISTANCE

The full aluminium frame of the WR5 Air brings together strength and lightness for truly intense spinning. Adjust your effort while riding using the central dial to activate mechanical resistance at the crankset.

With the ADS pedal hydraulic resistance, each spinning session helps strengthen your lower body muscles.

The feet, saddle, and handlebars can all be adjusted for any user size.

ERGONOMICS FOR EVERYONE AND EVERY POOL.





INCLUDED ACCESSORIES



Bottle insulated



Door bottle



Saddle Comfort

ADVANTAGES

Resistance
Adjustable mechanism

45° sport handlebar

Saddle & handlebar
height and depth adjustment

Aqua double speed pedals



Reference	WX-WR5A
Quality	Aluminium Tech T6
Finish	Anodising
Max. open dimensions	L 122 x W 55 x H 153 cm
Min. closed size	L 94 x W 55 x H 116 cm
Weight	16 kg
Water depth	1.10 m to 1.60 m
Warranty	2 years metal parts 6 months wearing parts

Stainless steel
RANGE

A range for the most demanding

Inspired by racing bikes, this stainless steel range is Waterflex's original line of aquabikes. Loved by sports clubs, thalassotherapy centres and public facilities, it stands out for its robust build, premium materials and advanced technologies.
Whatever your profile, there's a Waterflex aquabike that's perfect for you.

MARINE-GRADE 316L STAINLESS STEEL

Crafted from high-quality AISI 316L marine-grade steel, our aquabikes undergo electropolishing for maximum durability and a flawless finish.

AQUACONFORT 2 PEDALS

AquaConfort 2 pedals are thermo-moulded for an anatomical fit and feature fixed straps. They offer complete comfortand allow barefoot pedalling.

SACRIFICIAL ANODE

The sacrificial anode shields the bike from corrosion.Its zinc alloy is designed to oxidise first due to electropositivity, protecting the frame and metal components.

POSITION MARKERS

Maximum comfort is ensured for users thanks to position markers for quick and easy adjustments to both saddle and handlebars.

ADAPTIVE ERGONOMICS

With six adjustment axes and the Click & Turn system, the Inox range easily fits all body types and pool sizes.

EXPRESS DRAINAGE

Frame perforations allow for rapid water drainage, making the bike lighter when removed from the pool.



WR3

RESISTANCE
FIXED HYDRAULIC

CARDIO



THE WELLNESS POOL BIKE

The WR3 is the perfect aquabike for toning your legs, with multiple adjustments to suit every body type. Designed for daily use, it combines the gentle resistance of its Aquaspeed 2 pedals with exceptionally smooth pedalling.

Highly versatile, it's ideal for effective cardio workouts. Enjoy superb stability, a carry handle and instant drainage for easy handling. The WR3 is a favourite in many hotels and spas.

INCLUDED ACCESSORIES



Elastic



Handlebar training



Saddle Comfort

Reference	WX-WR3
Quality	AISI 316L stainless steel
Finish	Anodising
Max. open dimensions	L 114 x W 55.5 x H 151.5 cm
Min. closed size	L 94 x W 55.5 x H 114.5 cm
Weight	19.7 kg
Water depth	1.10 m to 1.60 m
Warranty	3 years on metal parts 6 months on wearing parts

WR5

RESISTANCE
VARIABLE RESISTANCE

SPINNING



THE INTENSIVE POOL BIKE

The WR5 is the sports-focused aquabike in its class. Fully adjustable saddle and handlebars suit all body types for optimum comfort. The Spinning Pro 2 system provides adjustable mechanical resistance.

Easily adjust workout intensity from your seat using the accessible dial. A friction pad acts on the high-grade 316L stainless steel flywheel to increase resistance and fine-tune every session.

INCLUDED ACCESSORIES



Elastic



Handlebar training



Saddle Comfort

Reference	WX-WR5
Quality	AISI 316L stainless steel
Finish	Anodising
Max. open dimensions	L 94 × W 55.5 × H 115 cm
Min. closed size	L 114.5 × W 55.5 × H 152 cm
Weight	23 kg
Water depth	1.10 m to 1.60 m
Warranty	3 years on metal parts 6 months on wearing parts



Aquafitmat
Aquatic exercise mat (anchoring kit included)

WARRANTY
2 YEARS

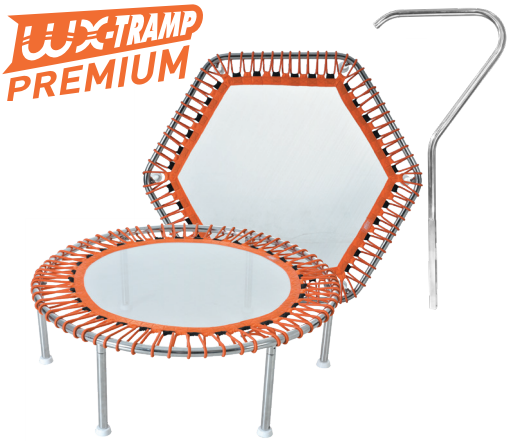

Wx Tramp
Pool trampoline



Aquajogg Air
Aluminium pool treadmill



Aquajogg
Stainless steel pool treadmill

For ⊕ For info scan

WARRANTY
3 YEARS
ALUMINUM

WARRANTY
2 YEARS
STAINLESS STEEL

WARRANTY
6 MONTHS
WEAR PARTS

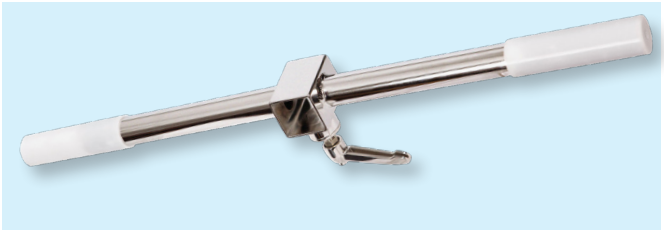

Training bar



resistance bands

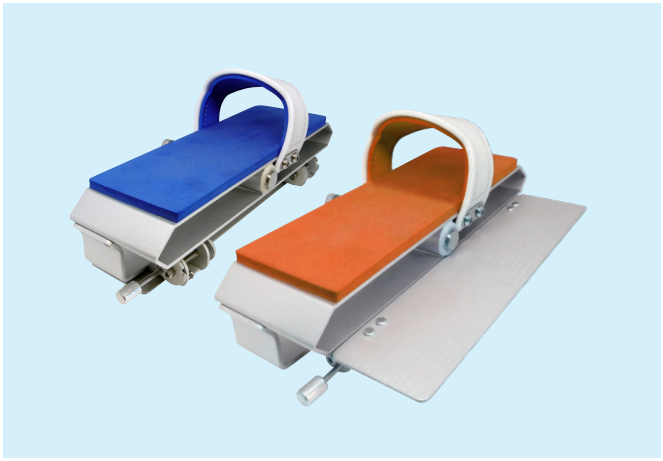

ADS flap pedals



sports bag



Comfort saddle

Reference	Description
Accessories Pool Bike / Aquabike	
WX-ADSP-BL	ADS clip pedals for aquabike (set of 2) blue
WX-ADSP-OR	ADS clip pedals for aquabike (set of 2) orange
WX-ASSP-BL02	ADS clip pedals for aquabike (set of 2) light blue
WX-AHP-RS01	Set of 2 metal HAPPY pedals - Fuchsia
WX-STC-VE02	Level 2 resistance band for aquabike - Green
WX-RIDERBAR-33	Aluminium multitraining bar: compatible with Ino 6 Air, Ino 7 Air, Ino 8 Air, WR Max
WX-SADDLE-W3	Comfort saddle
WX-BOTTLE-01W	Waterflex bottle - White
WX-BOTTLE-03S	Waterflex aluminium bottle - Silver
PS-RENOVX-125	Renov'Inox 125 ml
WX-RENOVX-125	Renov'Inox kit: 1 × 125 ml bottle + 1 sponge + 1 microfibre cloth
WX-SPORTBAG01	Blue sports bag



Holl's

The art of wellness

STEAM AND INFRARED SAUNAS
NORDIC BATHS

Based in Provence, Holl's draws inspiration from the elegance of French design, European craftsmanship and the strength of Nordic traditions.

This unique combination gives rise to products that are both timeless and contemporary, understated yet distinctive, designed to blend harmoniously into any living space.

More than a brand, Holl's is a philosophy: making wellbeing a way of life.



Saunas



“The premium sauna experience.”



Utopia



Moon



Canopée



Purewave



Cocoon



Hestia



Orphée



Onyxia Cube



Onyxia Barrel

Traditional steam.

Wellbeing, the traditional way

A steam sauna works by heating volcanic stones onto which water is poured, creating a cloud of steam, a dry heat that envelops the body in intense, slightly humid warmth (below 25%).
This sensory signature, inherited from the Finnish ritual, offers a gradual rise in temperature, enveloping comfort and deep relaxation. It turns every session into an authentic, purifying experience devoted to wellbeing.

Ideal for

lovers of authenticity

Average temperature

65-90 °C

Average length of a full session

45 min - 1 h (rest time included)



Utopia



Hestia, Orphée & Cocoon

Technology infra-red.

Wellbeing, the contemporary way

At Holl's, infrared is designed as a science of deep wellbeing. Thanks to our Quartz, Magnesium and Carbon technologies, infrared waves act at different depths of the skin to deliver targeted effects: relaxation, detox, muscle recovery or cellular revitalisation. This type of sauna gives off a dry, gentle, penetrating heat, unlike a hammam, which relies on humid heat.

Ideal for

intensive or gentle recovery

Average temperature

40-60 °C

Average length of a full session

25 to 45 min



Moon



Canopée



Purewave

Buying guide
for your indoor sauna





	Utopia			Canopée		
	3	4	6	2	3C	6
Technology	Traditional steam			Infrared: Quartz + Magnesium + Carbon		
Seats / lying places	3	4 / 2	6 / 3	2	3/4	6 / 3
Floor dimensions (width x depth)	150 × 110 cm	200 × 145 cm	200 × 183 cm	140 × 125 cm	160 × 160 cm	185 × 185 cm
Height	196 cm	196 cm	210 cm	190 cm	190 cm	190 cm
Infrared emitters (Quartz or Magnesium)	-	-	-	2	4	7
Carbon panels	-	-	-	6 (5 + 1 on floor)	5 (4 + 1 on floor)	7 (5 + 2 on floor)
Electrical power (kW)	4.5	6	9	2.15	3.25	4
Heater	Vulkano Black	Vulkano Black	Vulkano Black	-	-	-
Chromotherapy	✓	✓	✓	✓	✓	✓
Remote control	Optional	Optional	Optional	-	-	-
Audio	MP3 / FM / Bluetooth			MP3 / Bluetooth / Resonance speakers		
Control panel	Touch control panel			Touch control panel		
Exterior wood	Hemlock - Grade A			Hemlock - Grade A		
Bench and headrest wood	Abachi			Abachi		
Door	8 mm safety glass			8 mm safety glass		
Accessories	Sauna kit (bucket + ladle + hygrometer + sand timer) + stones			Ioniser, magazine holder & drink holder Smartphone holder		

For all our models:









Moon

1	2	4
Infrared: Quartz + Carbon		
1	2	4
Ø 102 cm	Ø 130 cm	Ø 180 cm
196 cm	196 cm	196 cm
3	2	4
4	6	12
1.97	2.30	4.62
-	-	-
✓	✓	✓
✓	✓	✓
FM / Bluetooth		
5" touchscreen (Moon 1 & 2) / 7" (Moon 4)		
Hemlock - Grade A		
Abachi		
8 mm safety glass (tinted on Black models)		
-	-	-





Purewave

2	3	3C
Infrared: Quartz + Magnesium		
2	3	3/4
130 × 110 cm	150 × 110 cm	140 × 140 cm
190 cm	190 cm	190 cm
5	6	7
1	1	1
2.25	2.6	2.6
-	-	-
✓	✓	✓
-	-	-
USB / MP3 / FM / Bluetooth		
Touch control panel		
Spruce - Grade A		
Abachi		
8 mm safety glass		
-	-	-





Utopia

Your journey into the imagination

3 versions available

Design Contemporary

Wood Hemlock

Electric heater double-walled

The traditional sauna experience in all its splendour

A true invitation awaits you. Like an interlude in your day, a moment to relax.

The warmth of a traditional sauna, the scent of wood, a large glass surface. Everything is there. The Utopia conveys a feeling of escape and freedom. A cocoon of serenity and detachment that takes you on a journey of your own choosing.

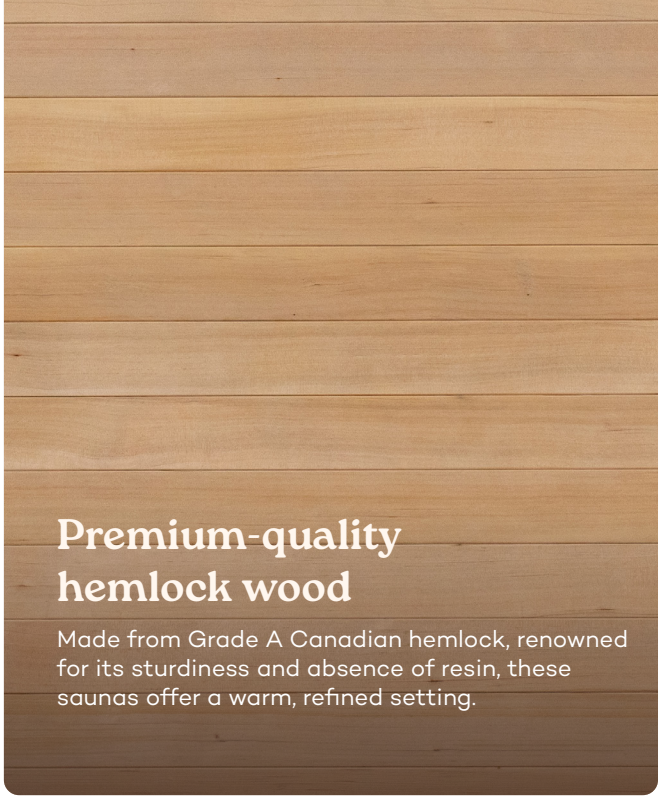

Premium-quality hemlock wood

Made from Grade A Canadian hemlock, renowned for its sturdiness and absence of resin, these saunas offer a warm, refined setting.

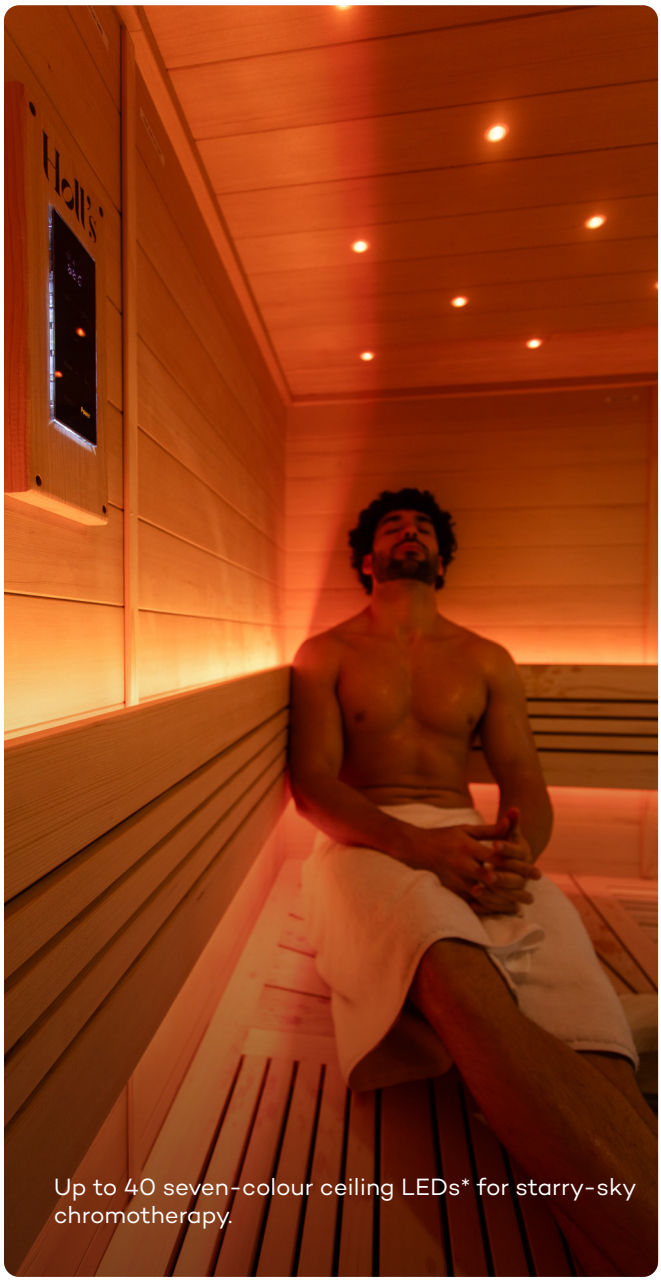

Up to 40 seven-colour ceiling LEDs* for starry-sky chromotherapy.

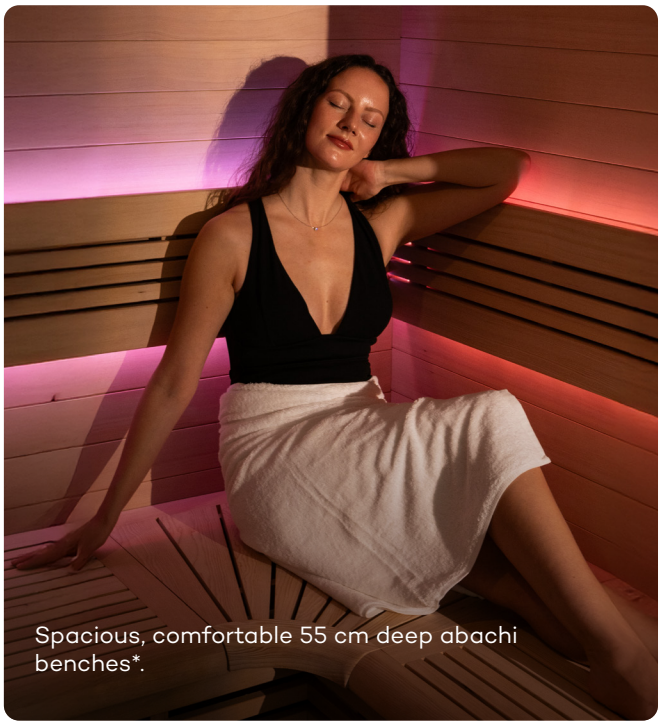

Spacious, comfortable 55 cm deep abachi benches*.

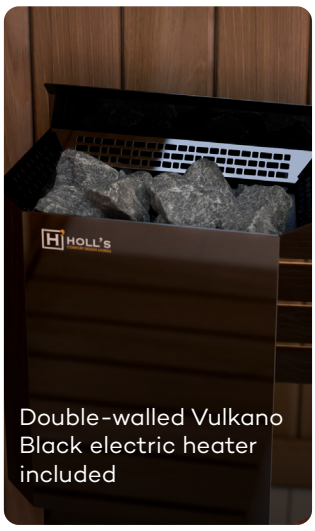

Double-walled Vulkano Black electric heater included

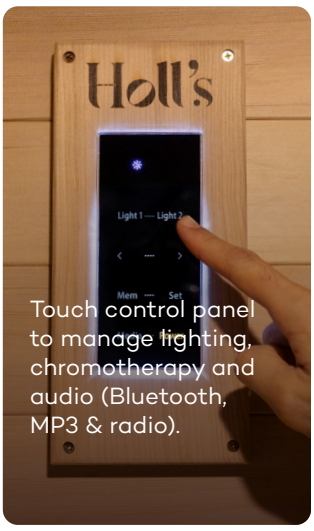

Touch control panel to manage lighting, chromotherapy and audio (Bluetooth, MP3 & radio).

*These figures apply to the Utopia 4 and 6

Utopia 6-seater

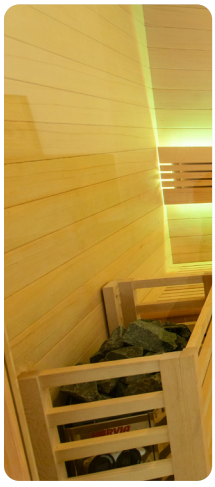



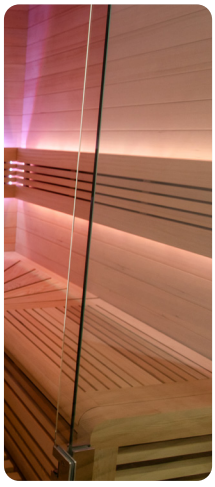

Enjoy the benefits of

Chromotherapy

Chromotherapy uses variations in light and colour to positively influence mood and sensations. Built into the sauna, it promotes relaxation and emotional balance, and enhances the overall feeling of wellbeing.

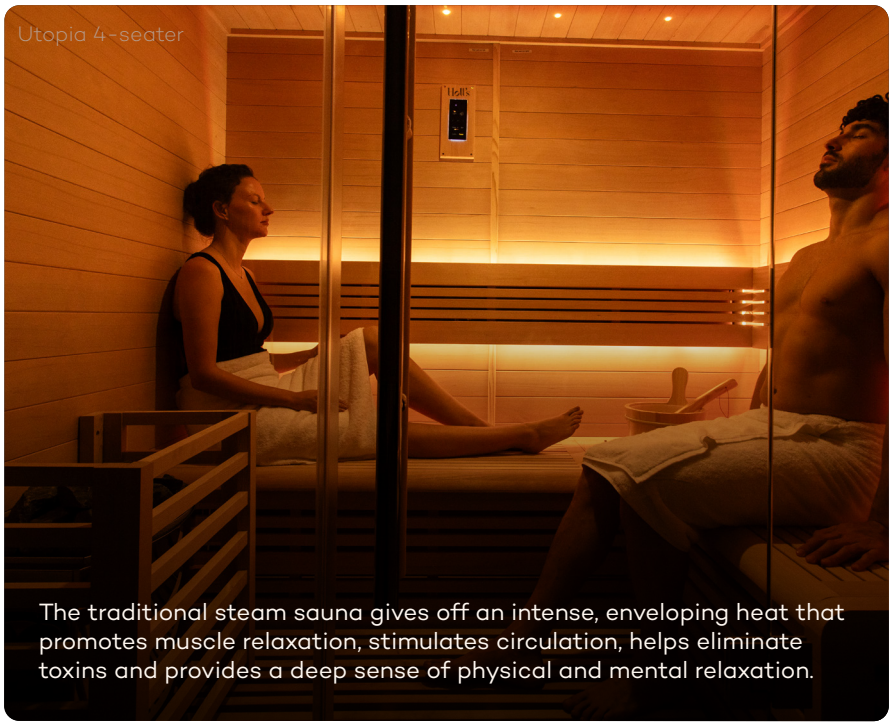





Utopia 3

HL-UTA03C

3 seats

W 150 x D 110 x H 196 cm

Electric heater included

Vulkano Black 4.5 kW





Utopia 4

HL-UTA04C

4 seats

W 200 x D 145 x H 196 cm

Electric heater included

Vulkano Black 6 kW





Utopia 6

HL-UTA06C

6 seats

W 200 x D 183 x H 210 cm

Electric heater included

Vulkano Black 9 kW





Moon

A luxurious setting for your moments of wellbeing

3 versions available

Quartz & Carbon infrared sauna

Wood Hemlock

Digital touchscreen

Bold design and infrared technology

With its unique circular architecture, the Moon sauna wraps the body in gentle, continuous warmth, like a cocoon.

Its rounded walls, the result of precise craftsmanship in wood and glass, form a perfect curve that creates a deeply enveloping feeling and more even air circulation. Equipped with Dual Healthy infrared technology combined with carbon panels, Moon delivers heat that is both targeted and enveloping: the Quartz emitters work deep down to relieve tension and stimulate circulation, while the carbon ensures gentle, even heat distribution for optimal comfort.

Natural wood or deep black: the Moon sauna adapts to your style with two distinctive finishes.



Enhance your interior with this contemporary-design sauna

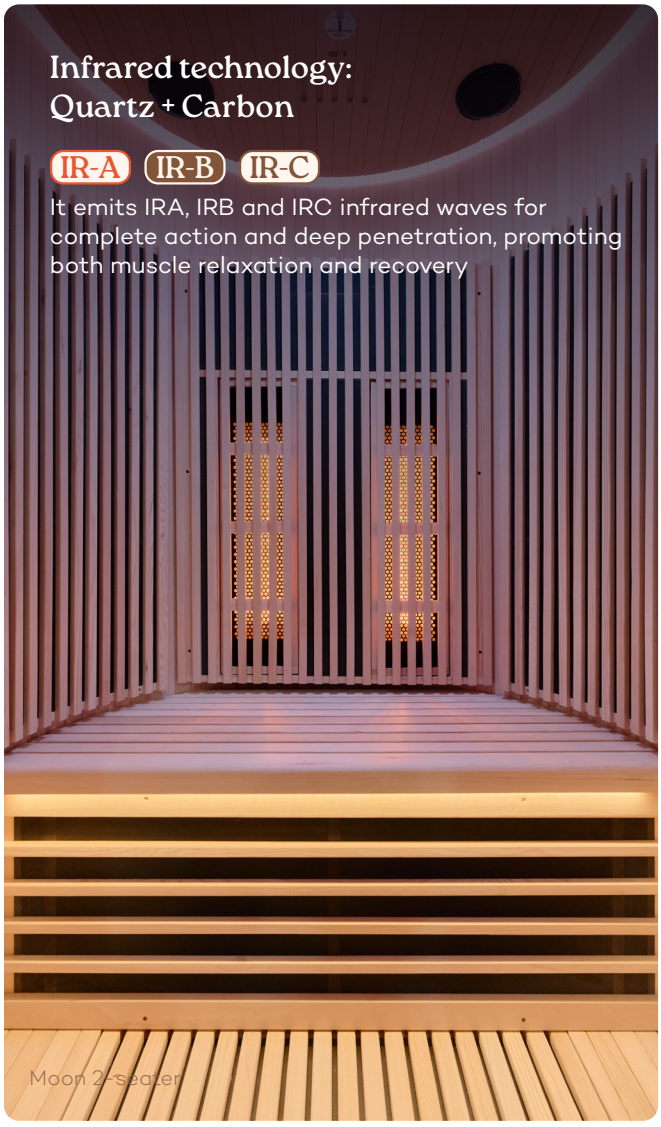

Infrared technology: Quartz + Carbon

IR-A IR-B IR-C

It emits IRA, IRB and IRC infrared waves for complete action and deep penetration, promoting both muscle relaxation and recovery

Moon 2-seater

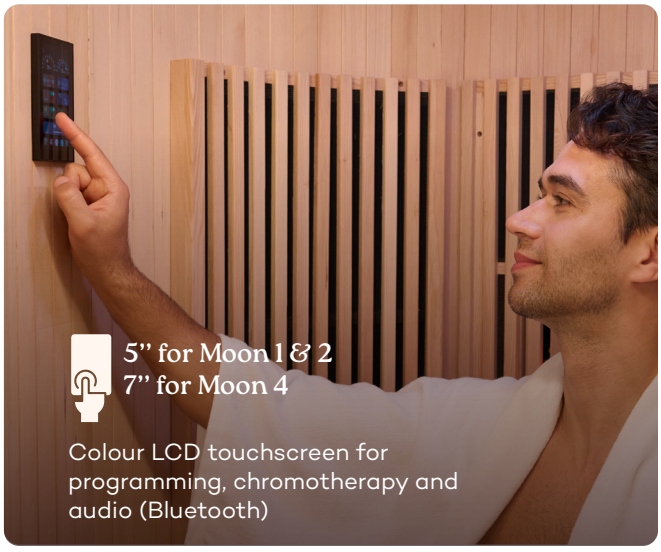

5" for Moon 1 & 2
7" for Moon 4

Colour LCD touchscreen for programming, chromotherapy and audio (Bluetooth)

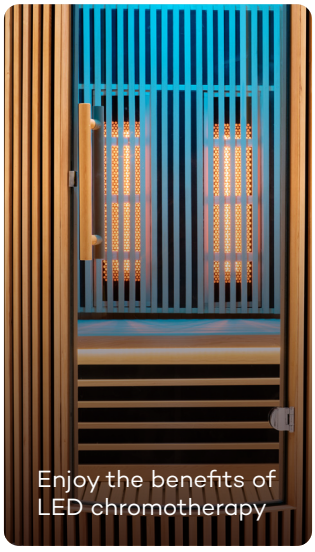

Enjoy the benefits of LED chromotherapy

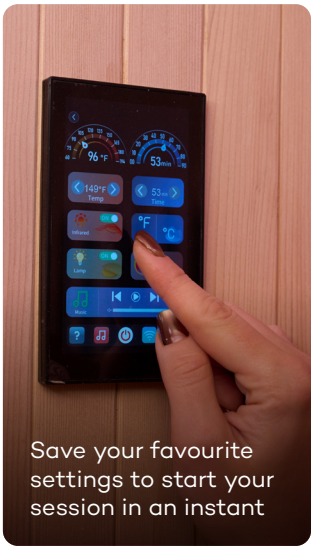

Save your favourite settings to start your session in an instant



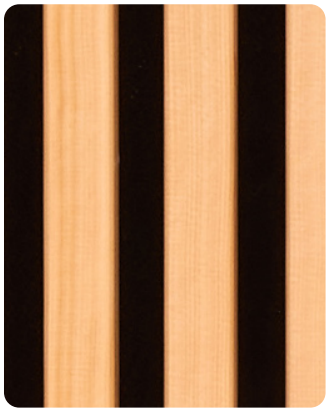

Wood & black



Black & black

The Moon is available in

2 colours

Available in Wood or Black finishes, our models make a bold, elegant design statement. Natural warmth or deep contrast: each version enhances your interior and can become its centrepiece.



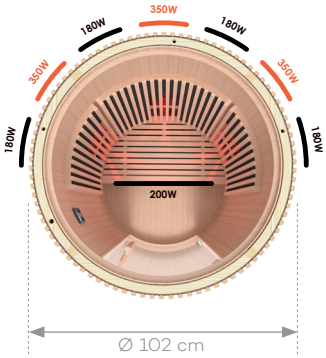

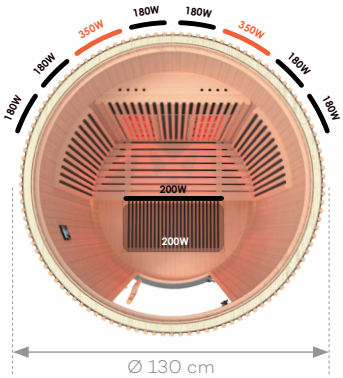

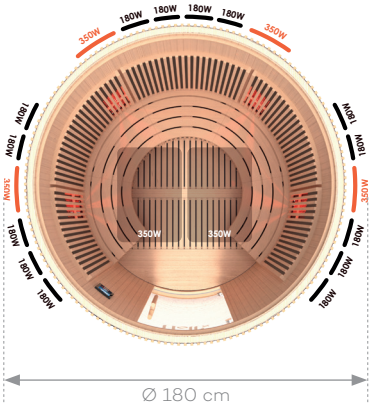

Moon 1

HL-MOON1 | HL-MOON1-BLK

1 seat

Ø 102 x H 196 cm

Infrared emitters

1,970 W: 3 Quartz + 5 Carbon



Moon 2

HL-MOON2 | HL-MOON2-BLK

2 seats

Ø 130 x H 196 cm

Infrared emitters

2,305 W: 2 Quartz + 7 Carbon



Moon 4

HL-MOON4 | HL-MOON4-BLK

4 seats

Ø 180 x H 196 cm

Infrared emitters

4,620 W: 4 Quartz + 14 Carbon





Canopée

A unique experience where design and technology become one!

3 versions available

Quartz, Magnesium & Carbon infrared sauna

Wood Hemlock

Digital touchscreen

Your tailor-made infrared sauna session

The Canopée range brings together the best of home infrared by combining three cutting-edge technologies: Quartz, Magnesium and Carbon.

Thanks to this complementary combination and a precision potentiometer, you quickly enjoy the benefits of the different wavelengths (IRA, IRB, IRC) according to your needs. Muscle recovery, pain relief or pure relaxation: customise your session for optimal, targeted results, all in premium comfort.



Infrared technology: Quartz + Magnesium + Carbon

IR-A IR-B IR-C

This adaptable technology lets you tailor your session:
- potentiometer settings to adjust the intensity of the Quartz emitters
- 3 types of emitters positioned throughout the cabin, including under the bench



Adjustable Quartz emitters



Immersive resonance audio

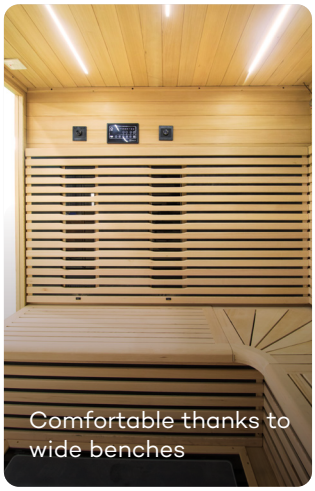

Comfortable thanks to wide benches

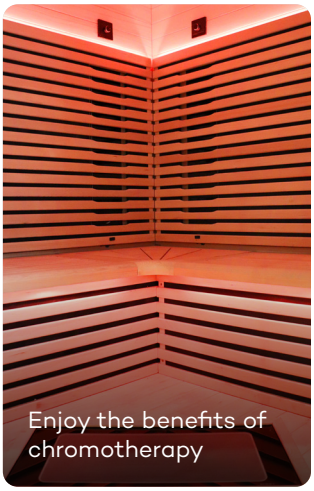

Enjoy the benefits of chromotherapy

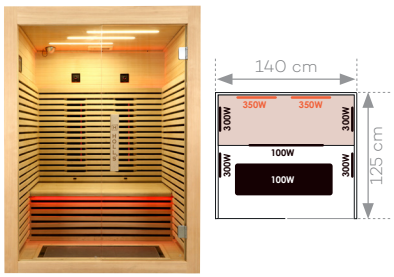

Canopée 2

HL-CNP02

2 seats

W 140 x D 125 x H 190 cm

Infrared emitters

2,150 W: 2 Dual Healthy (Quartz + Magnesium) + 6 Carbon

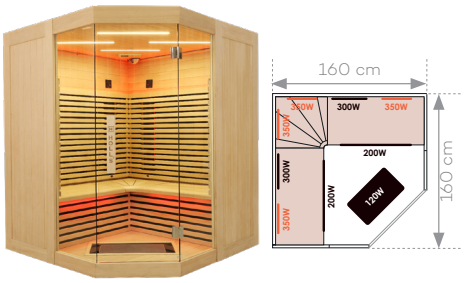

Canopée 3C

HL-CNP03C

3-4 seats

W 160 x D 160 x H 190 cm

Infrared emitters

2,600 W: 4 Dual Healthy (Quartz + Magnesium) + 5 Carbon

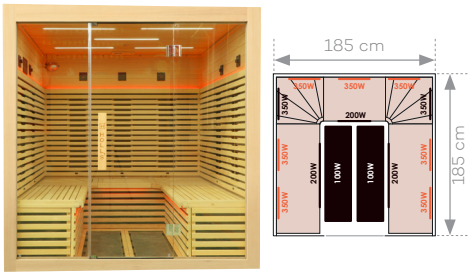

Canopée 6

HL-CNP06

6 seats

W 185 x D 185 x H 190 cm

Infrared emitters

4,000 W: 7 Dual Healthy (Quartz + Magnesium) + 7 Carbon



Purewave Evo

A wellness break in your everyday life

3 versions available

Quartz & Magnesium infrared sauna

Canadian spruce

Resonance audio

Infrared in a classic design

The Purewave sauna by Holl's is a premium infrared cabin dedicated to wellbeing, combining deep relaxation with optimal comfort.

Made from Canadian spruce, a sturdy and elegant wood, it combines Quartz and Magnesium emitters for adjustable heat, gentle or deeper depending on your needs. Refined design, LED chromotherapy, an audio system and a touch control panel complete this cabin, designed to turn every session into a true relaxation ritual.

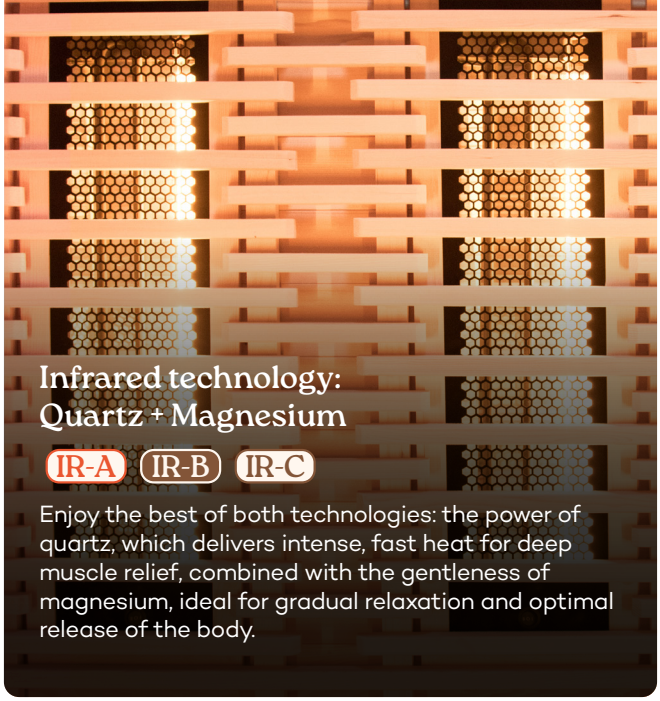

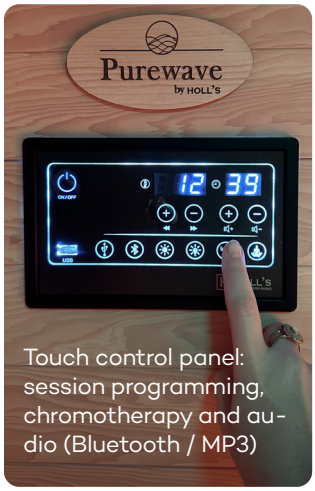



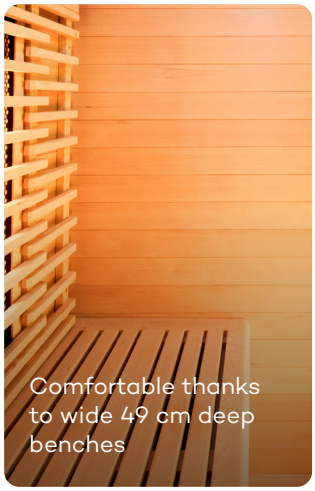

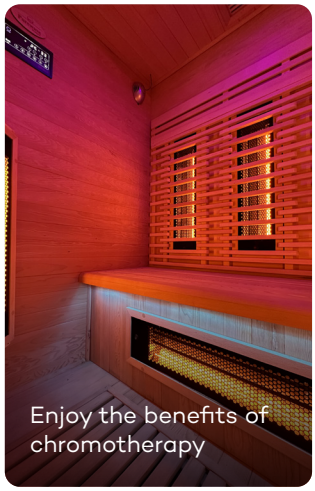





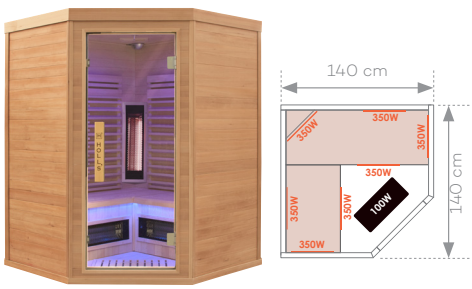

Purewave 2

HL-PUR02

2 seats

W 130 x D 110 x H 190 cm

Infrared emitters

2,250 W: 5 Dual Healthy (Quartz + Magnesium) + 1 Carbon

Purewave 3

HL-PUR03

3 seats

W 150 x D 110 x H 190 cm

Infrared emitters

2,550 W: 6 Dual Healthy (Quartz + Magnesium) + 1 Carbon

Purewave 3C

HL-PUR03C

3/4 seats

W 140 x D 140 x H 190 cm

Infrared emitters

2,600 W: 7 Dual Healthy (Quartz + Magnesium) + 1 Carbon

Buying guide
for your outdoor sauna



	Cocoon	Hestia	Hestia Lounge	Orphée	Orphée Lounge
Seats / lying places	2	4 / 2		6 / 3	
Dimensions (width x depth)	130 × 130 cm	205 × 160 cm	205 × 210 cm	205 × 180 cm	205 × 240 cm
Height	200 cm	220 cm	220 cm	215 cm	215 cm
Footprint	150 × 115 cm	220 × 127 cm	220 × 177 cm	150 × 160 cm	150 × 220 cm
Rear window	Half-moon	Half-moon		Half-moon	
Electric heater	Holl's Vulkano	Holl's Vulkano	Holl's Vulkano	Holl's Vulkano	Holl's Vulkano
Recommended electric heater power (kW)	4.5	6	6	9	9
Chromotherapy	✓	✓		✓	
Bench type	1 raised level	2 levels incl. 1 L-shaped		2 levels incl. 1 L-shaped	
Seat wood	Thermo-treated Canadian pine	Thermo-treated Canadian pine		Thermo-treated Canadian pine	
Exterior wood	Thermo-treated Canadian pine 38 mm	Thermo-treated Canadian pine 38 mm		Thermo-treated Canadian pine 38 mm	
Assembly (people)	2	2	2	2	2
Accessories	Sauna kit (bucket + ladle + hygrometer + sand timer)				

For all our models:







Onyxia
Cube



Onyxia
Barrel

4 / 2	6 / 2
210 × 160 cm	225 × 240 cm
220 cm	226 cm
153 × 142 cm	160 × 188 cm
Optional	Rear half-moon
Optional	Optional
From 4.5	From 6 Wood-burning stove compatible
-	-
2 levels incl. 1 L-shaped	Double facing benches
Abachi	Linden
Finnish Thermowood® pine 42 mm	Finnish Thermowood® pine 40 mm
2	2
Optional	Optional







Assembly and installation service

reference: SERV-SN-EDM03

Available throughout France for all models:
- Qualified, certified professional
- Full management and follow-up by POOLSTAR



Cocoon

A moment for yourself, suspended above the city

Ideal for compact spaces

Electric heater included

Wood thermo-treated

Rear window half-moon

The urban traditional sauna

Compact, elegant and high-performing, the Cocoon 2-seater outdoor sauna has been specially designed to fit on terraces and in urban spaces. Made from thermo-treated Canadian pine, it combines natural aesthetics with exceptional weather resistance.

Featuring authentic steam technology and an LED chromotherapy strip, it offers a soft, relaxing atmosphere, ideal for a moment of wellbeing alone or for two. Relaxation, elegance and innovation in one, by Holl's.

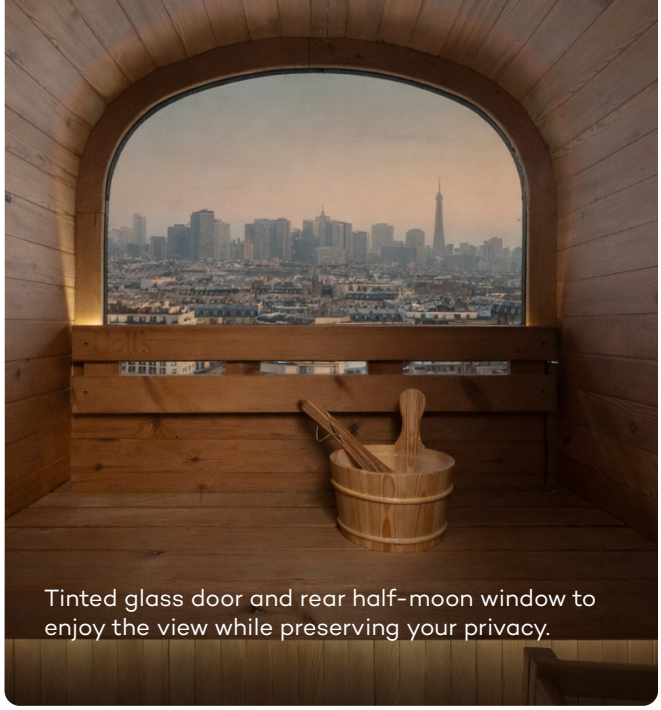

Tinted glass door and rear half-moon window to enjoy the view while preserving your privacy.



Small footprint, ideal for terraces or compact spaces



Thermo-treated Canadian pine naturally resistant to weathering and mould



Traditional steam technology and double-walled Vulkano Black 4.5 kW electric heater included









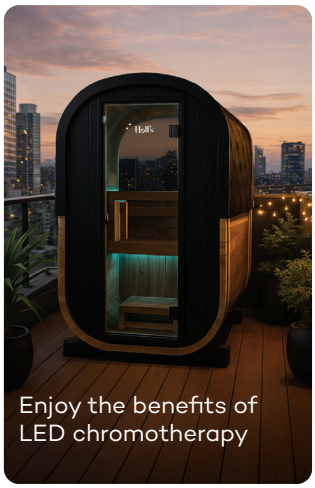

Enjoy the benefits of LED chromotherapy

Cocoon

HL-COCOON130-PK

2 seats

W 130 x D 130 x H 200 cm

Electric heater

Vulkano Black 4.5 kW*

* Can also be sold without an electric heater



Hestia

Elegance and conviviality

2 versions available

Design Contemporary

Wood thermo-treated

Rear window half-moon

Wellness tradition at the heart of your garden

Designed as a true contemporary wellness space, the Hestia sauna appeals with its clean design and straight lines, which blend harmoniously into any outdoor setting.

Its design makes the most of space while offering great freedom of layout to create a fully bespoke wellness area. A perfect blend of modern aesthetics, functionality and comfort, it turns every session into a personalised experience. The Lounge version features an outdoor terrace so you can alternate between heat and rest during your sessions.

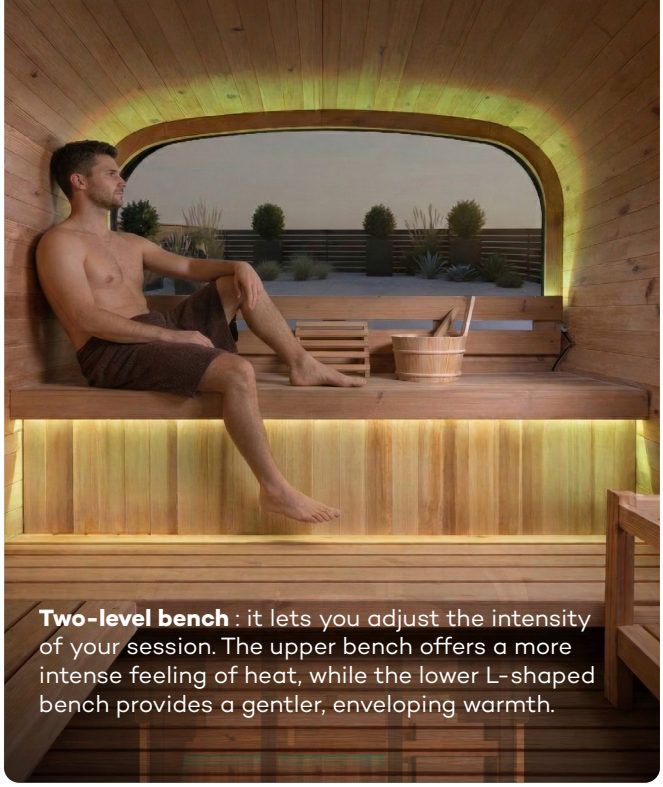

Two-level bench : it lets you adjust the intensity of your session. The upper bench offers a more intense feeling of heat, while the lower L-shaped bench provides a gentler, enveloping warmth.



Traditional steam technology and double-walled Vulkano Black 6 kW electric heater included

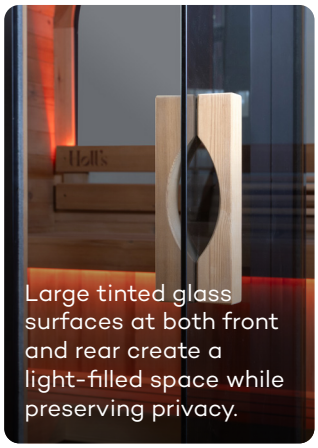

Large tinted glass surfaces at both front and rear create a light-filled space while preserving privacy.

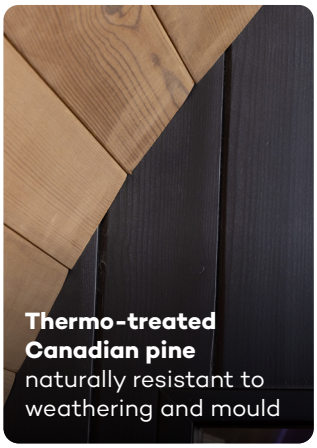

Thermo-treated Canadian pine naturally resistant to weathering and mould

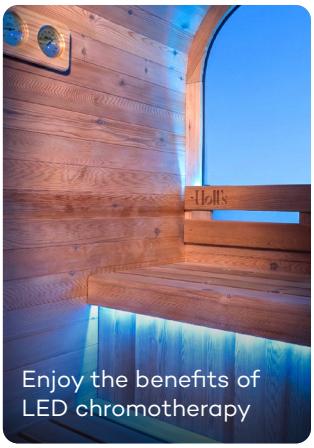

Enjoy the benefits of LED chromotherapy



Lounge version with a wide, comfortable terrace, ideal for alternating between heat and rest during your sessions.

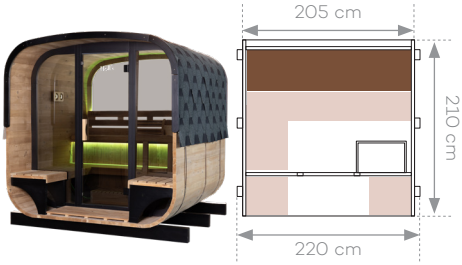

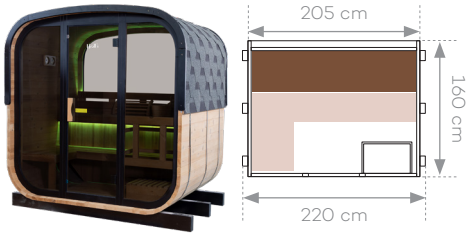

Hestia *Lounge*

HL-HESTIA210L-PK

3 to 4 seats

W 205 x D 210 x H 220 cm

Electric heater

Vulkano Black 6 kW*

Hestia

HL-HESTIA160-PK

3 to 4 seats

W 205 x D 160 x H 220 cm

Electric heater

Vulkano Black 6 kW*

* Can also be sold without an electric heater



Orphée

The authenticity of traditional barrel design

2 versions available

Design Contemporary

Wood thermo-treated

Rear window half-moon

Steam tradition reinvented

Designed as a wellness cocoon, this thermo-treated Canadian spruce sauna combines natural elegance with thermal performance.

Its rounded shape, inspired by traditional Nordic saunas, promotes even heat distribution, while its double bench with side return ensures optimal comfort. Available in a classic version or a Lounge version with integrated terrace, it adapts to every wish.

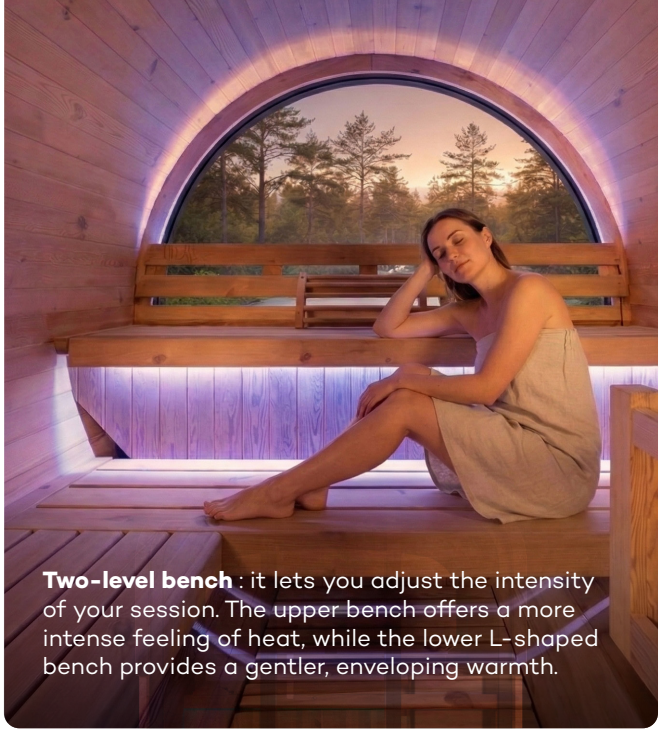

Two-level bench : it lets you adjust the intensity of your session. The upper bench offers a more intense feeling of heat, while the lower L-shaped bench provides a gentler, enveloping warmth.



Traditional steam technology and double-walled Vulkano Black 9 kW electric heater included

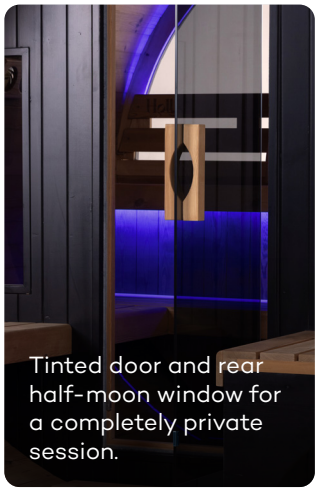

Tinted door and rear half-moon window for a completely private session.

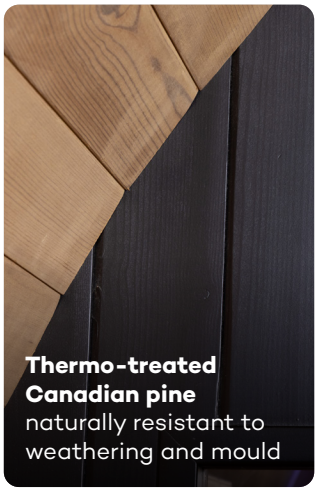

Thermo-treated Canadian pine naturally resistant to weathering and mould



Enjoy the benefits of LED chromotherapy





Orphée *Lounge*

HL-ORPH240L-PK

5 to 6 seats

W 205 x D 240 x H 215 cm

Electric heater

Vulkano Black 9 kW*





Orphée

HL-ORPH180-PK

5 to 6 seats

W 205 x D 180 x H 215 cm

Electric heater

Vulkano Black 9 kW*

* Can also be sold without an electric heater



Lounge version with a comfortable terrace, ideal for alternating between heat and rest during your sessions.

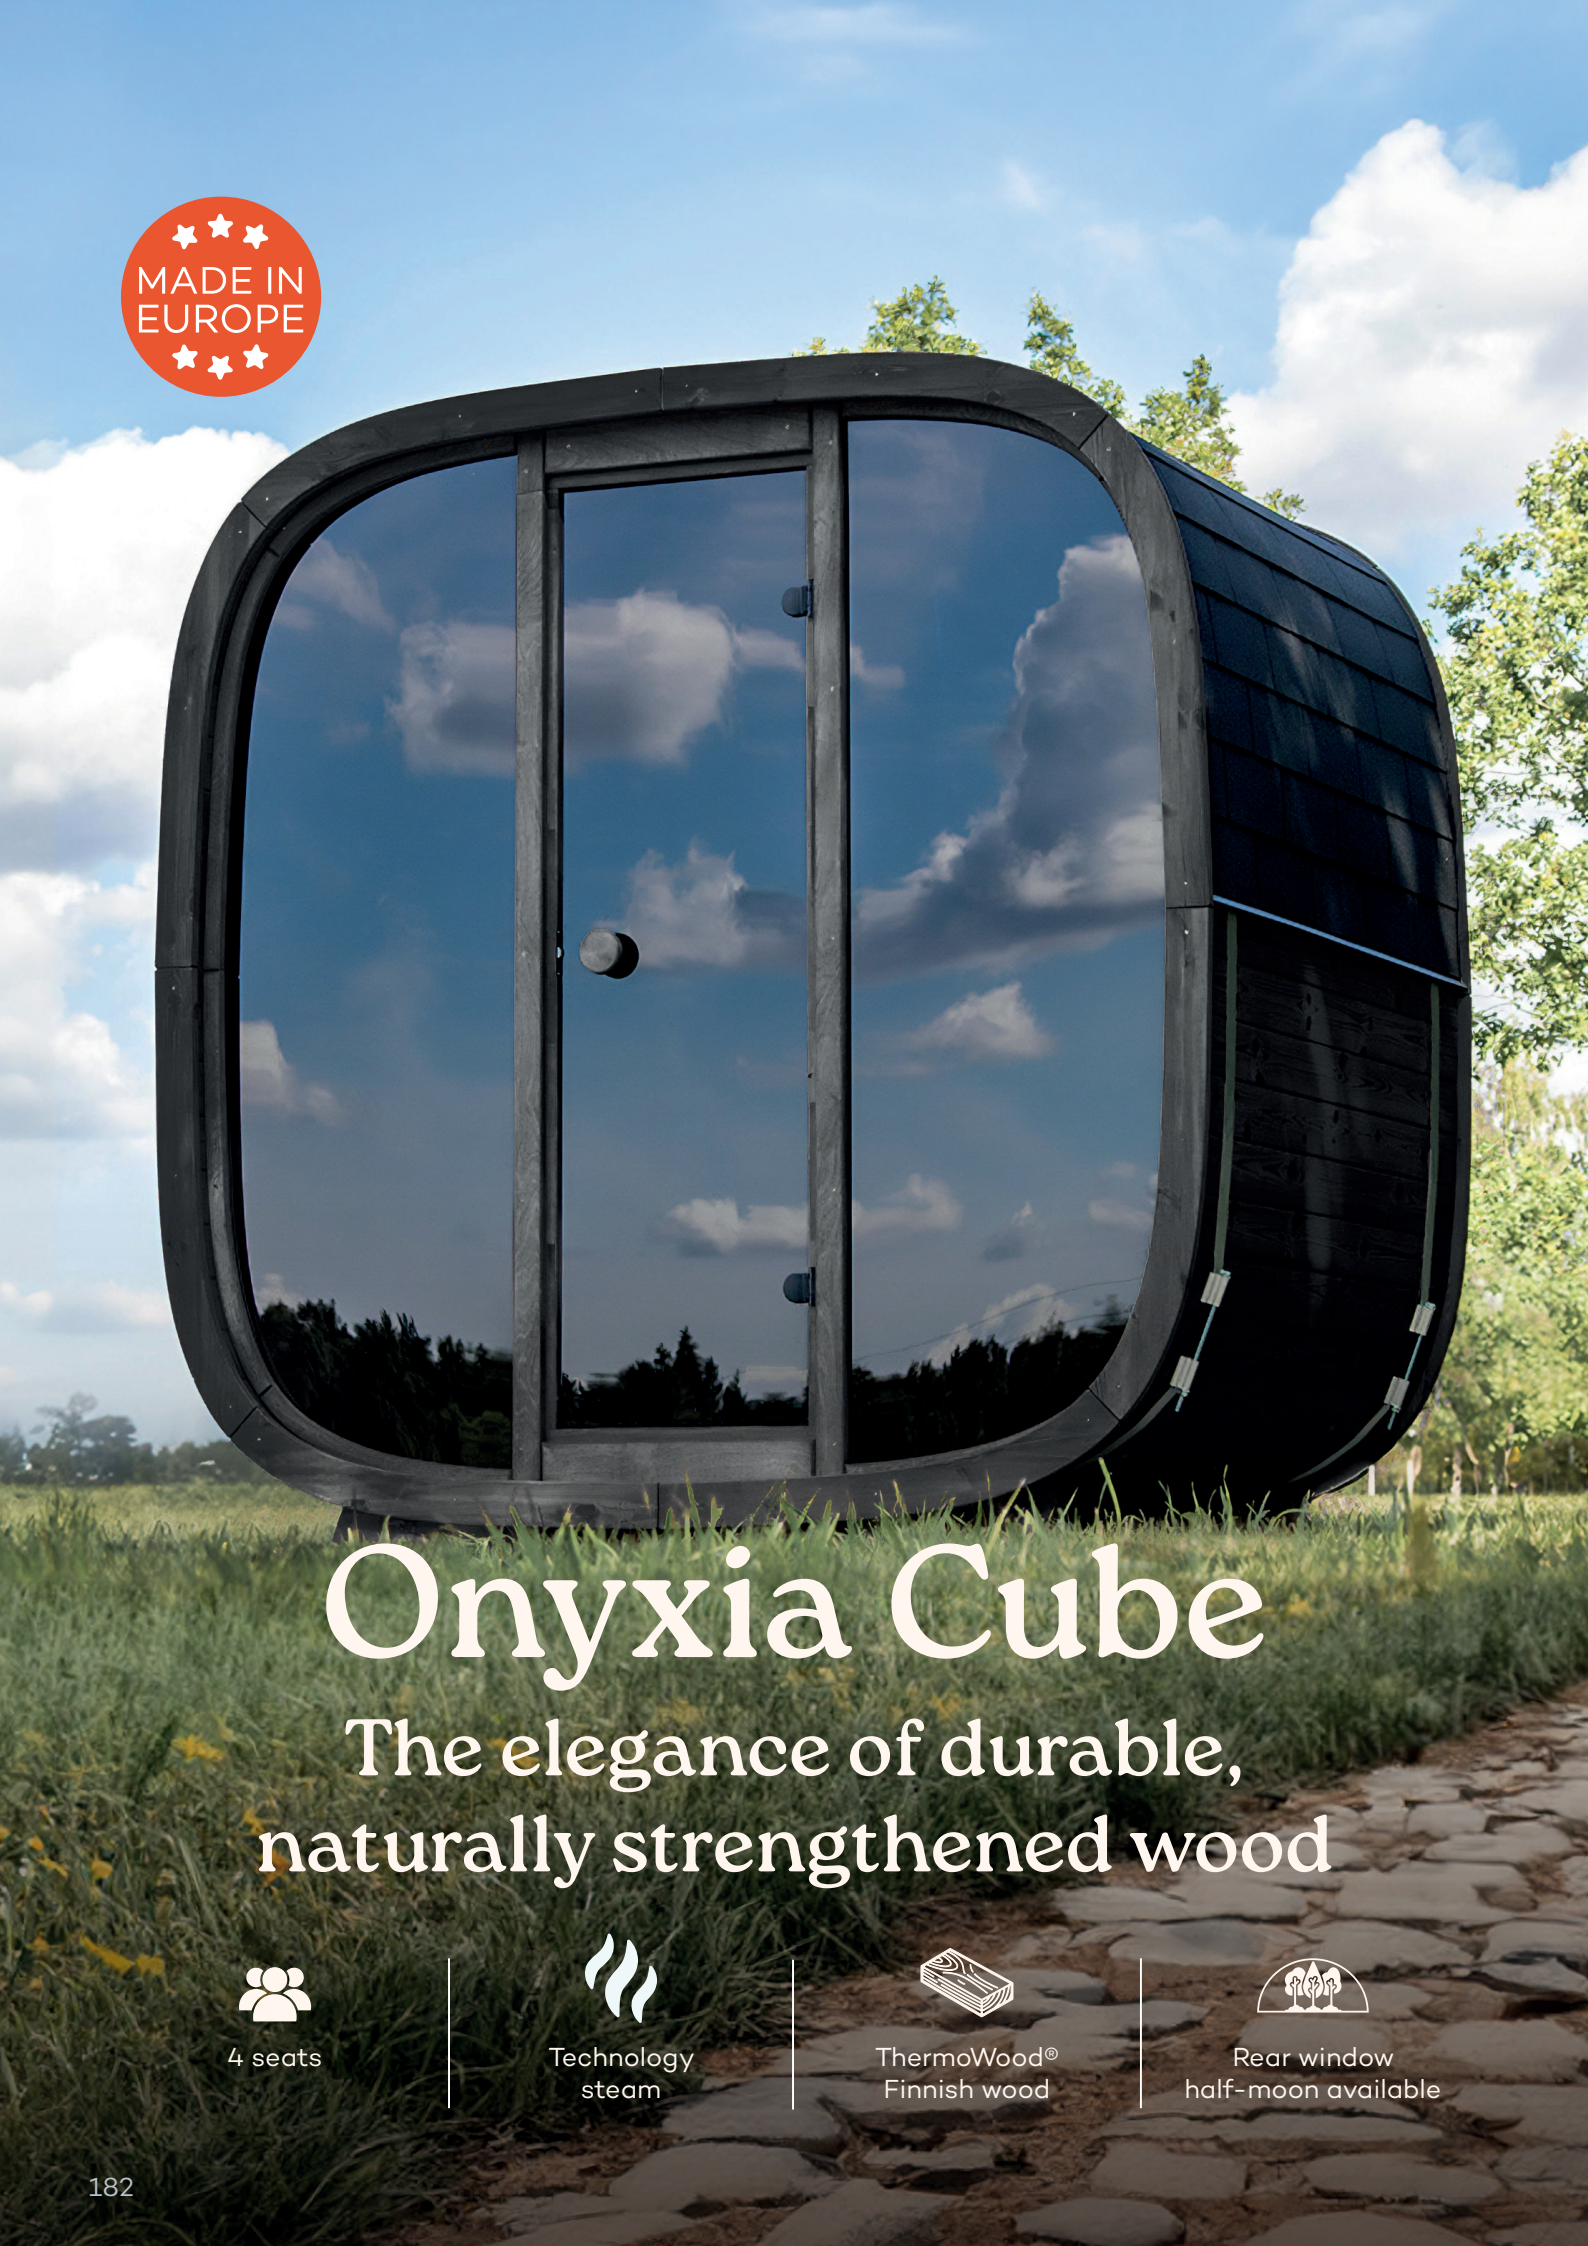

Onyxia Cube

The elegance of durable, naturally strengthened wood

4 seats

Technology steam

ThermoWood®
Finnish wood

Rear window
half-moon available

Elegance and comfort

The Onyxia Cube is a spacious, elegant sauna designed to accommodate up to 4 people. Its contemporary design combines durable materials and intense heat for an immersive experience of relaxation and revitalisation.

Thanks to ThermoWood® technology, it offers exceptional durability. Its large picture window lets you enjoy the view in complete privacy, creating a true haven of peace. Made in Europe, it embodies the perfect blend of modernity, comfort and authenticity.

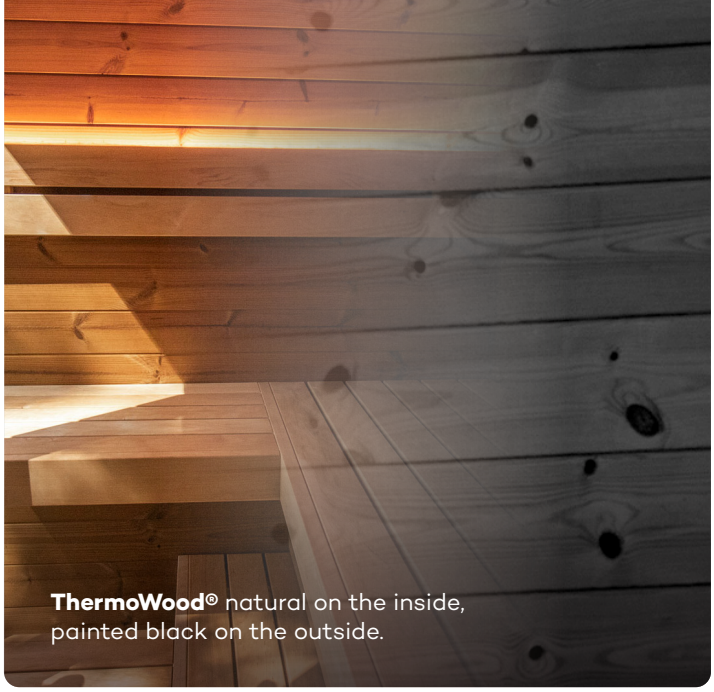

ThermoWood® natural on the inside, painted black on the outside.



Customisable front and rear windows



LED lighting for a warm atmosphere & spacious abachi benches



A convivial space for up to 4 people





Onyxia Cube

HL-SSBLK160

4 seats or 2 lying places

W 210 x D 160 x H 220 cm

Electric heater

From 4.5 kW (not included)



Customisation

A design to suit your style

The Onyxia Cube offers elegant customisation options to match your aesthetic preferences. Choose the front or rear panel to suit your taste: glazed for a bright, open view, or classic for a more discreet look.



Onyxia Barrel

Combine tradition and modernity with a warm design in durable wood

6 seats

Technology steam

ThermoWood® Finnish wood

Rear window half-moon

The wood-burning stove compatible sauna

The Onyxia Barrel is an outdoor sauna that combines tradition and modernity, ideal for an authentic, immersive experience.

Made from ThermoWood® for exceptional durability, it stands out with its elegant black finish and half-moon window offering a panoramic view. Its spacious interior features two deep facing benches, perfect for moments of relaxation. Adaptable to your wishes, it can be fitted with an electric heater or a wood-burning stove.



ThermoWood® natural on the inside, painted black on the outside.



An elegant 14 mm thick rear half-moon window for better thermal insulation

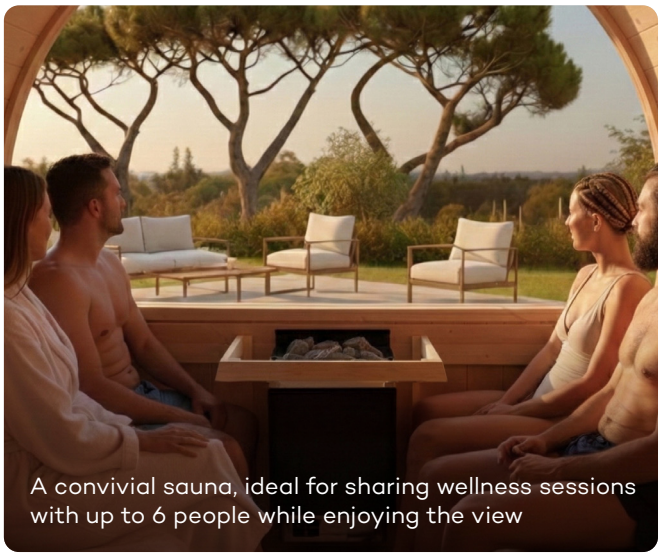

A convivial sauna, ideal for sharing wellness sessions with up to 6 people while enjoying the view



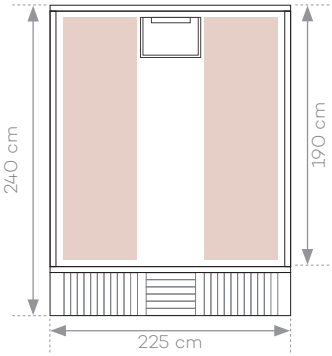

Onyxia Barrel

HL-ONYXBARREL

6 seats or 2 lying places

W 225 x D 240 x H 220 cm

Electric heater

From 6 kW (not included)



Compatible with wood-burning stove & electric heater

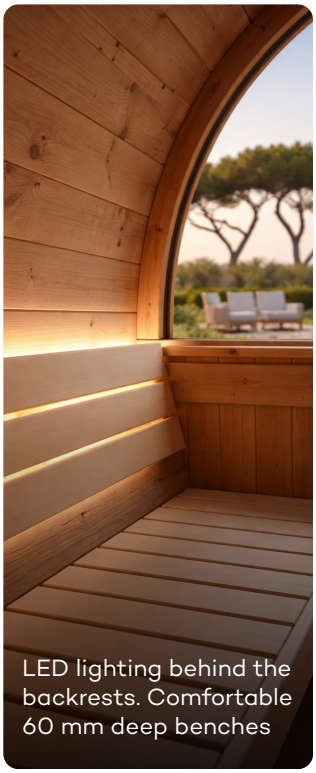

LED lighting behind the backrests. Comfortable 60 mm deep benches

Heaters & accessories



Vega | Wall Black Steel | Vulkano Black minicombi | Vulkano Black combi | Drop

	VEGA				WALL BLACK STEEL			VULKANO BLACK			DROP		
								MINI COM-BI	COMBI				
Reference	SN-HAR-VIA-PO35	SN-HAR-VIA-PO45*	SN-HAR-VIA-PO60*	SN-HAR-VIA-PO80*	SN-HAR-VIA-SW45*	SN-HAR-VIA-SW60*	SN-HAR-VIA-SW60*	HL-NRMC-36NB-BL	HL-NRNC-60NB-BL	HL-NRNC-90NB-BL	SN-HUUM-DR4E	SN-HUUM-DR6E	SN-HUUM-DR9E
Power	3.5 kW	4.5 kW	6 kW	8 kW	4.5 kW	6 kW	8 kW	3.5 kW	6 kW	9 kW	4.5 kW	6 kW	8.5 kW
Volume recommended (min. - max.)	1 - 4.5 m³	3 - 6 m³	5 - 8 m³	7 - 12 m³	3 - 6 m³	5 - 8 m³	7 - 12 m³	3 - 6 m³	5 - 9 m³	8 - 14 m³	3 - 7 m³	5 - 9 m³	8 - 13 m³
Power supply	230 V 1N / 400 V 3N				230 V 1 N / 400 V 3 N			230 V 1N / 400 V 3N			230 V 1 N / 400 V 3 N		
Dimensions (W x D x H)	280 × 295 x 505 mm	480 × 310 × 540 mm			430 × 260 × 700 mm			345 × 300 × 525 mm	400 × 385 × 610 mm		390 × 335 × 590 mm		
Weight (without stones)	7 kg	11 kg			11 kg	12 kg	14 kg	7 kg	9 kg	9 kg	11 kg	11 kg	12 kg
Max. capacity	12 kg	20 kg			20 kg			10.5 kg	22 kg	22 kg	55 kg		
Mounting	Wall-mounted				Wall-mounted			Wall-mounted			Wall-mounted		
Control unit	Built-in				Built-in			Optional			Optional		
Warranty	2 years												



* HARVIA remote control available.

REMOTE CONTROL UNIT *HARVIA* FENIX

Available on quotation

Units available for the Vulkano Black

HL-SAU-B-CF-V2: standard control unit
or HL-INC-SET-V2: control unit with remote control



HL-SAU-B-CF-V2

or



HL-INC-SET-V2

WOOD-BURNING STOVE KIT HARVIA

Exclusively for the Onyxia Barrel outdoor sauna.





WOOD-BURNING STOVE



GUARD



CHIMNEY



SIDE GUARD





INFRARED HEATED BACKREST

Ergonomic backrest with built-in infrared heating element, in high-quality aspen with adjustable headrest.

Perfect for taking the benefits of infrared wherever you like.

Power plug supplied. Plugs into any mains socket (220 V).



COLD SHOWER BUCKET

Wooden cold shower bucket with mounting bracket. Anti-overflow system and 18 L capacity. Perfect for fully enjoying the Scandinavian experience.



WOODEN COAT HOOKS, 3 & 5 HOOKS

Screw-on wooden coat hooks, ideal for hanging towels and bathrobes at the entrance or exit of a sauna or spa.

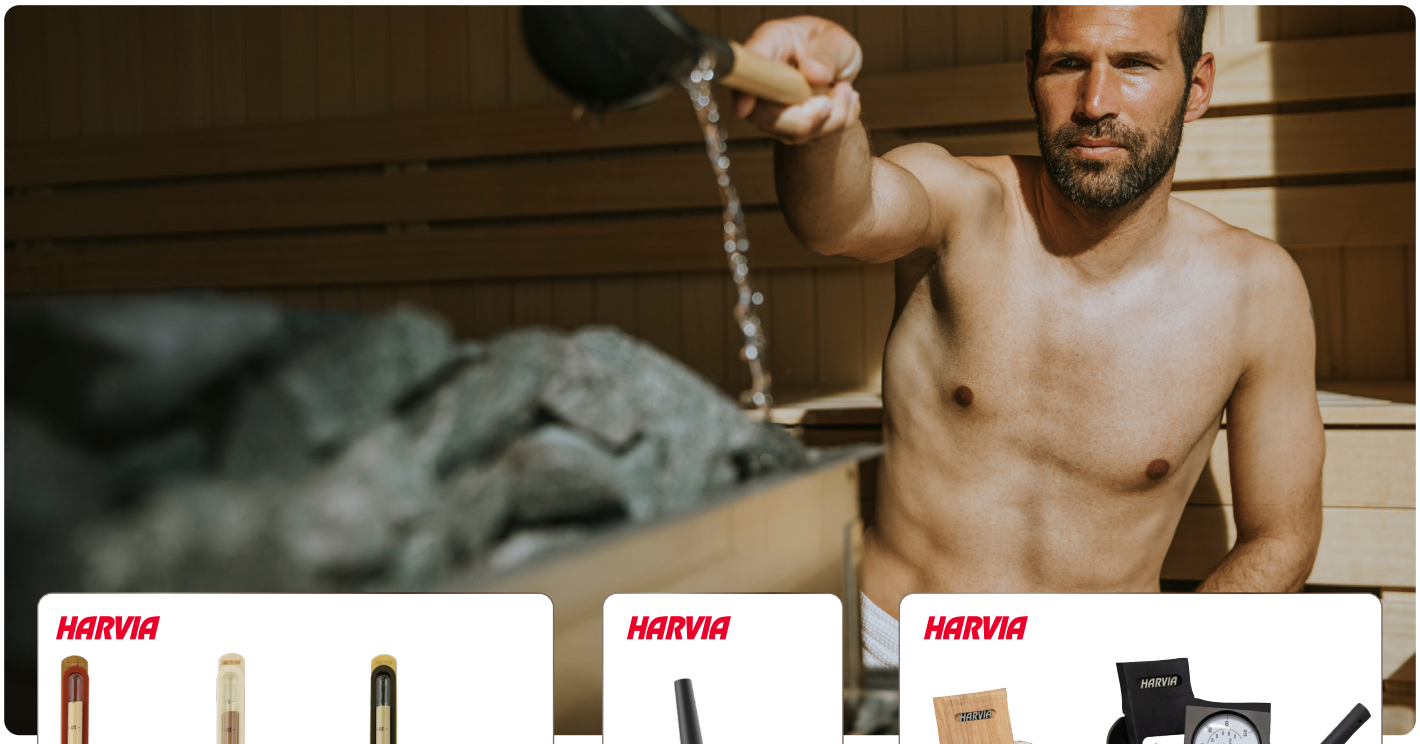



HELMI ACCESSORY KIT

Harvia kit made from recycled materials, comprising bucket, ladle and sand timer.



ACCESSORY KIT

Plastic Harvia kit, comprising bucket and ladle.



ACCESSORY KIT IN STAINLESS STEEL

Stainless steel bucket and ladle, thermometer and hygrometer.



WOODEN SAUNA KIT

Traditional wooden sauna kit made up of 2 sets: bucket (4 L) + ladle, and thermometer + sand timer.



STAINLESS STEEL SAUNA KIT

Traditional wood and stainless steel* sauna kit comprising a bucket (5 L) and a ladle.

* for greater durability



ONYXIA SAUNA KIT

Traditional black wood and stainless steel sauna kit made up of 2 sets: bucket (4 L) + ladle, and thermometer + sand timer.

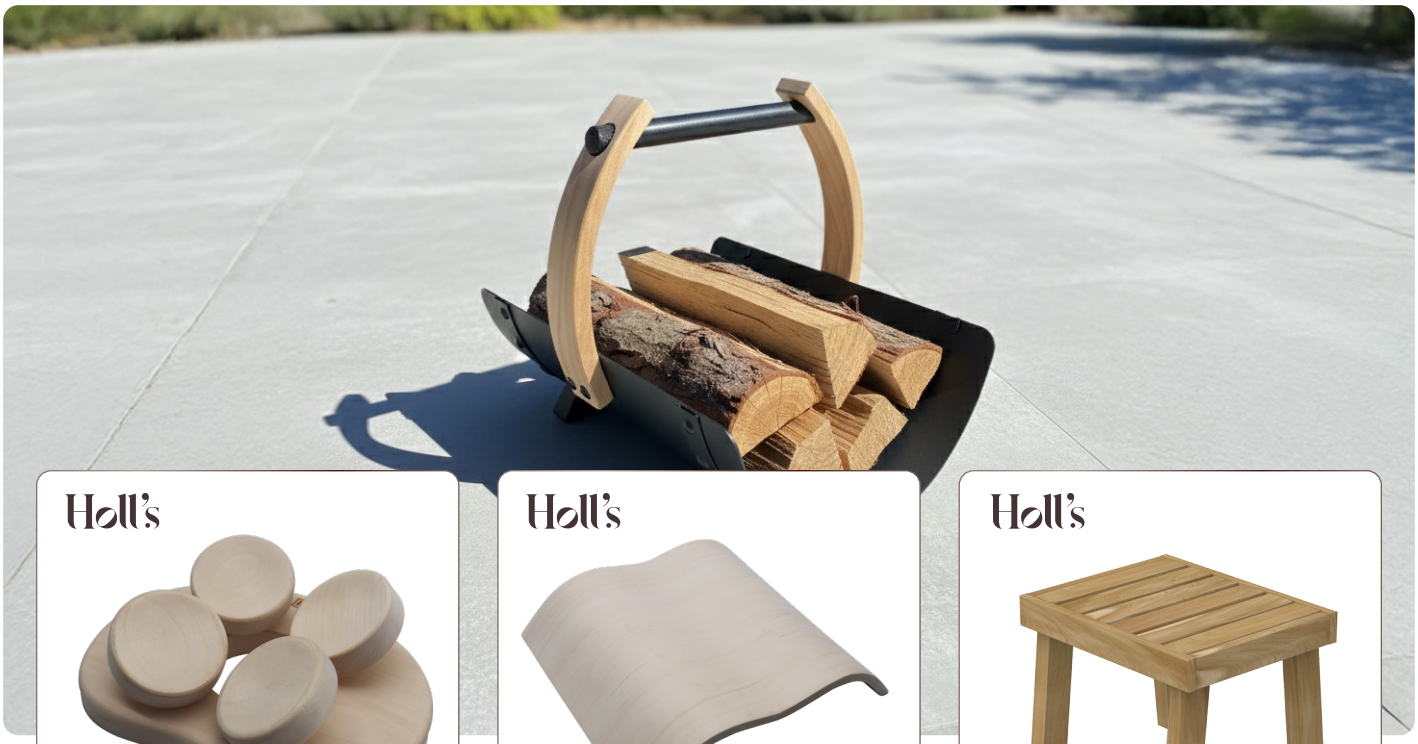

ERGONOMIC HEADREST

Ergonomic headrest that perfectly fits the shape of the head. High-quality aspen model. Compatible with all saunas that allow you to lie down.

HEADREST

Sturdy, comfortable headrest. High-quality cedar model. Compatible with all saunas that allow you to lie down. Dimensions: 18 × 23 cm

SEATING BENCH

Designed to add a seat in your sauna, or to be used as a side table. Fully resistant to heat and humidity thanks to its cedar construction. Dim. 534 × 430 × 400 mm



HARVIA LEGEND METAL BASKET

Premium-design firewood storage basket. Specifically for outdoor saunas with a wood-burning stove. Metal frame and high-quality wooden handle.



HARVIA STONE

Stones for electric heater or wood-burning stove (20 kg)



ESSENTIAL OIL GIFT SET

Set of 4 bottles of 100 ml essential oils for sauna & hammam. This set contains the following fragrances: Finnish Sauna, Eucalyptus, Cedarwood and Sakura.



IPX6 WATERPROOF BLUETOOTH SPEAKER

Connect to the speaker for a relaxing musical moment. Waterproof, heat-resistant (< 65 °C), with 8 hours of battery life (1800 mAh battery). USB charging.

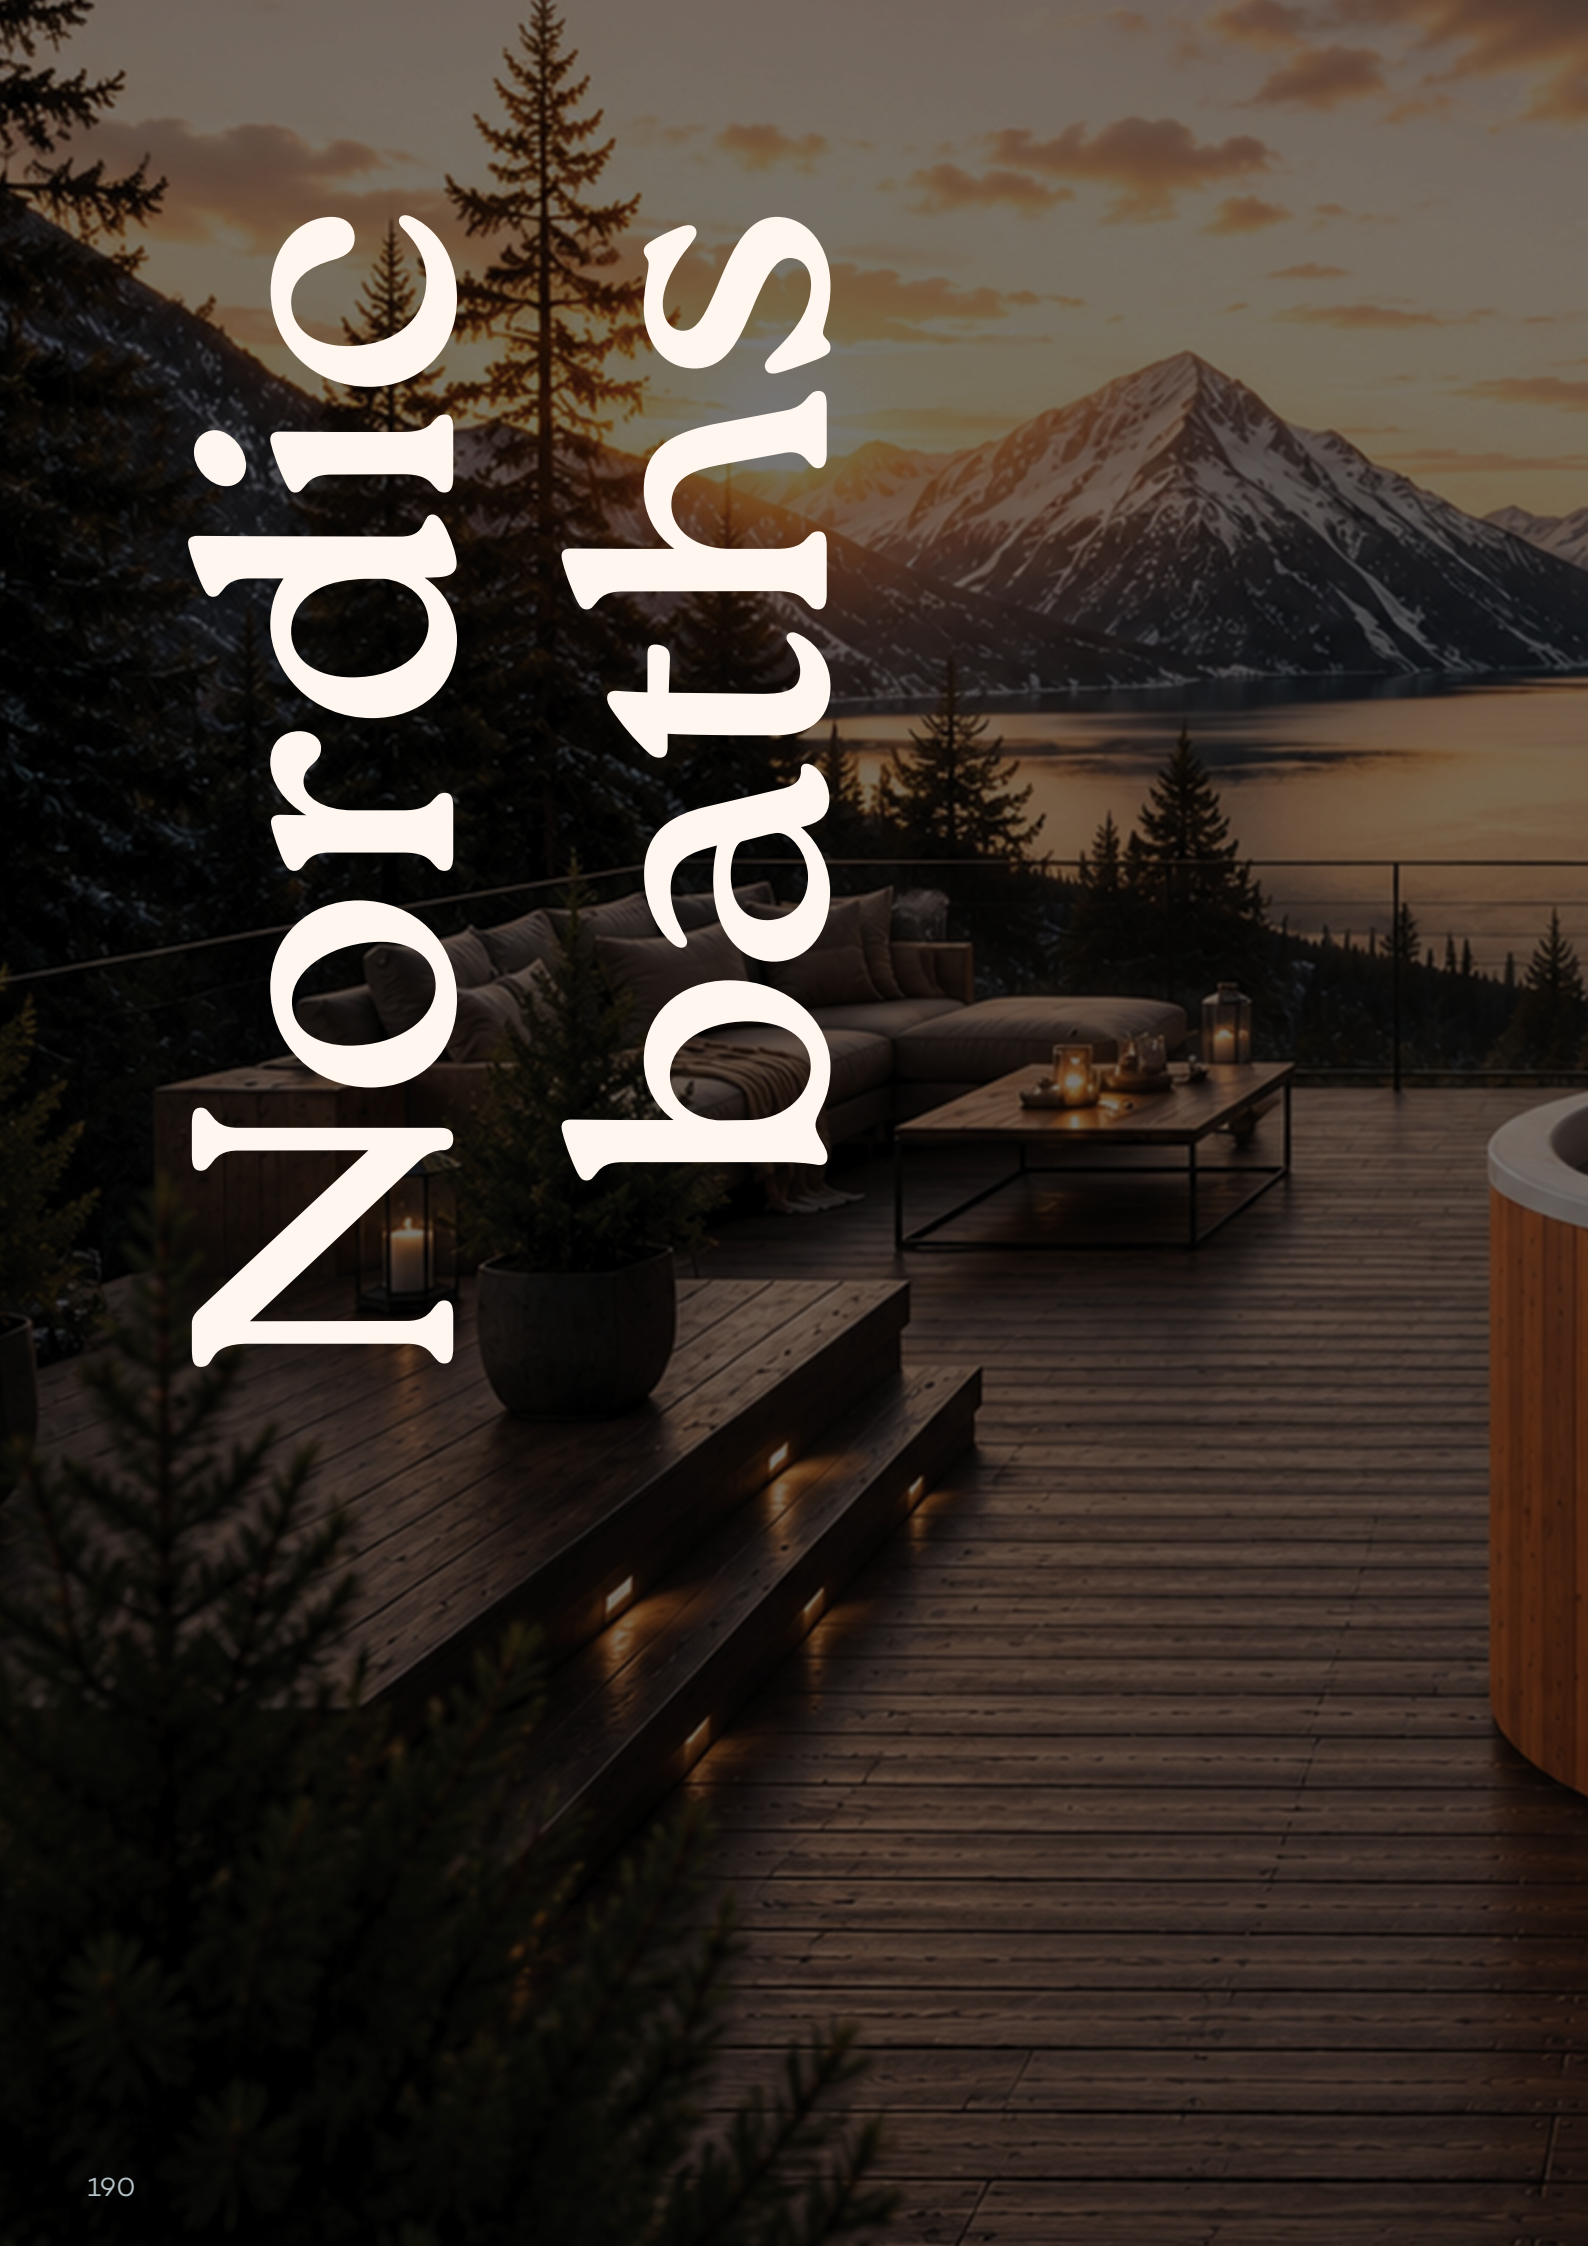
Nordic baths

“Where comfort meets authenticity.”



Vali



Olma



Oskar



Hilda



Spa-level comfort

Designed for lasting comfort, the reinforced fibreglass tub combines a soft touch, robustness and easy maintenance. It delivers the same quality bath after bath, season after season.

- **Smooth, pleasant surface** for optimal seating comfort.
- **Easy maintenance** thanks to a non-porous finish that is simple to clean.
- **Excellent resistance** to UV, frost and temperature changes.
- **Outstanding durability,** keeping its appearance year after year.
- **Optimal hygiene,** with a surface that limits the build-up of impurities.

The authenticity
of solid thermo-treated wood



- **Authentic Scandinavian design: brings charm and character to your outdoor space**
- **Excellent weather resistance, ages gracefully**
- **Wood's natural insulation helps retain the water's heat**

70 mm thermal cover

All our Nordic baths come with an insulated thermal cover that keeps the water warm for longer, reduces heating time and protects your bath from debris.





5-colour LED lighting

Personalise the atmosphere of every bath with 5-colour LEDs and their lighting modes, adding a touch of wellbeing, relaxation and elegance to your evenings.



Built-in blowers*

Built-in blowers release thousands of fine bubbles, turning every bath into a truly relaxing experience.

*except Vali

Flexible heating options



Wood-burning stove

Authentic warmth and a Nordic experience

- Authentic experience
- Fast heating
- Natural wood-fired heating
- No electricity consumption



Heat pump

Your ally for perfectly controlled temperature

- Temperature controlled to the degree
- Hot or cold bath with chiller
- Easy to use with remote control
- Built-in filtration to preserve the water

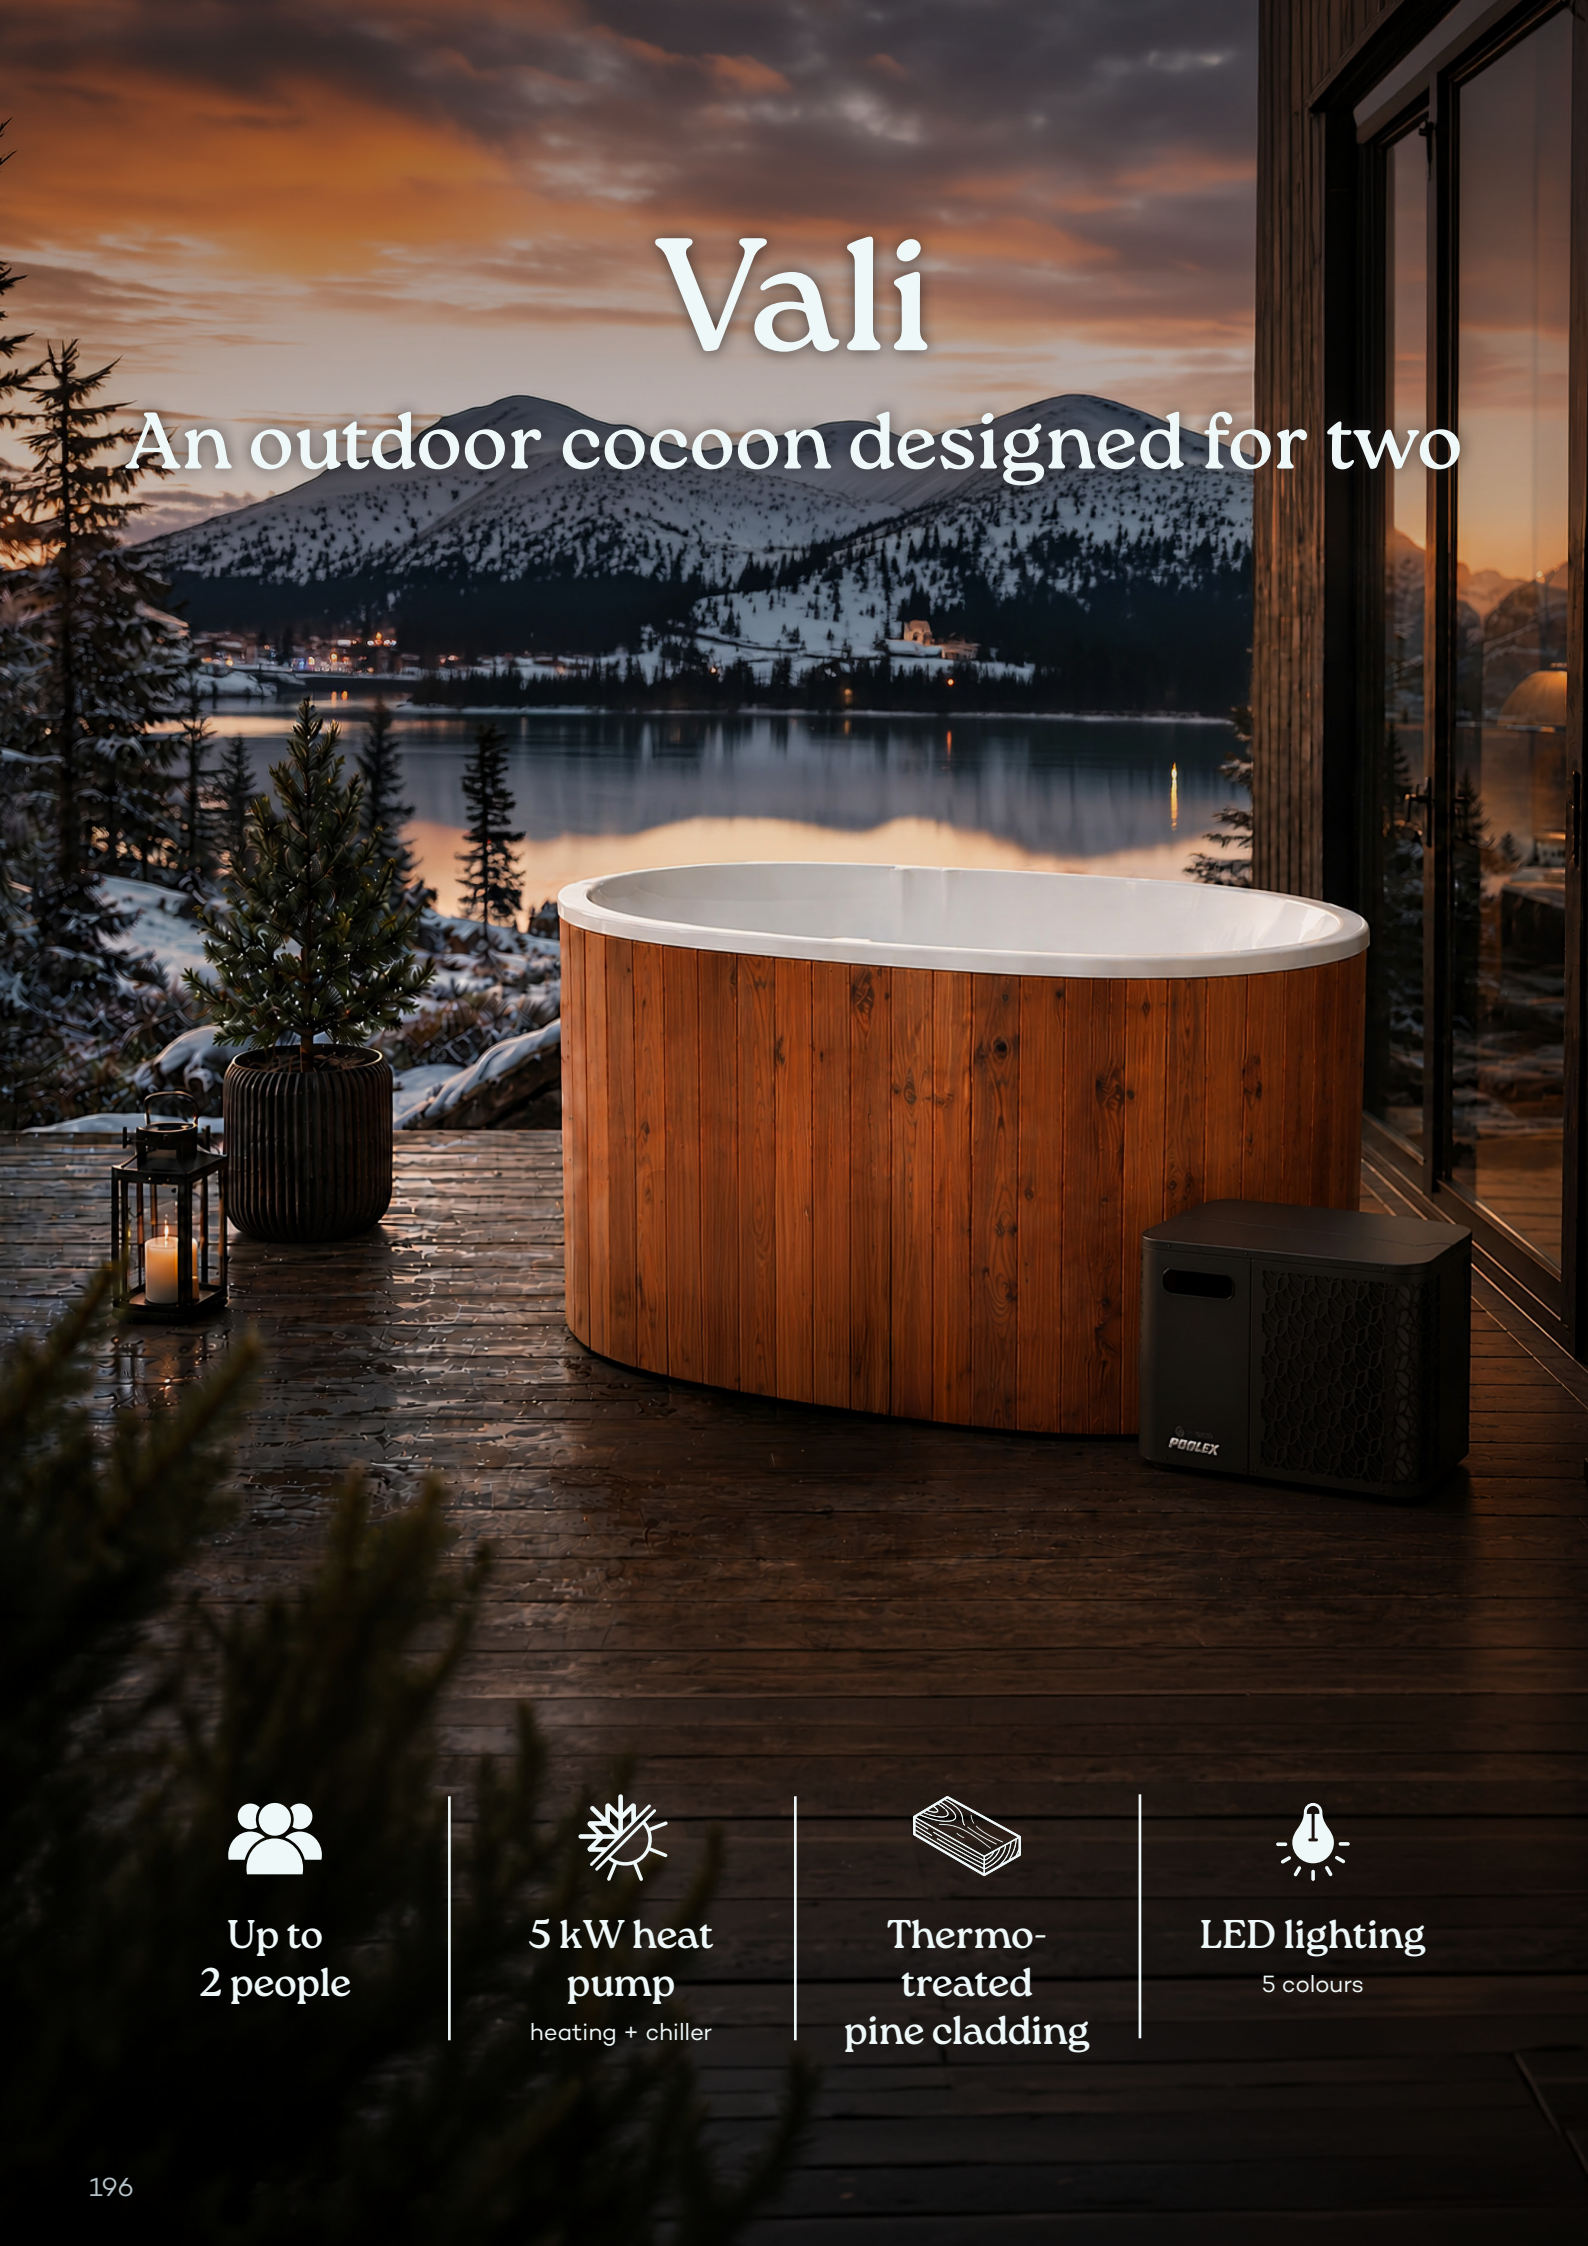

Vali

An outdoor cocoon designed for two

Up to
2 people

5 kW heat
pump
heating + chiller

Thermo-
treated
pine cladding

LED lighting
5 colours

The compact Nordic bath designed for moments for two

With its oval shape and 2-person capacity, Vali is designed for special moments alone or for two. Fitted with a heat pump with built-in circulation pump, it heats up smoothly and offers optimal comfort, for an experience as simple as it is elegant.

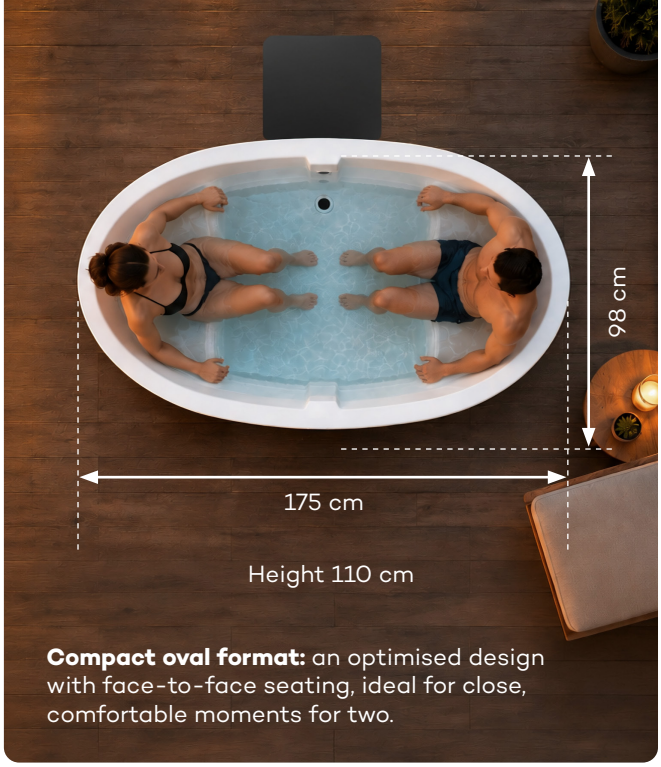

Compact oval format: an optimised design with face-to-face seating, ideal for close, comfortable moments for two.



Thermo-treated pine frame & cladding

Excellent durability and longevity, ideal for year-round outdoor installation



Comfortable, high-performance tub

Reinforced fibreglass (vinylester & polyester resin), built to demanding technical standards, resistant from -50 °C to +70 °C.



Immersive comfort

Carefully designed ergonomics for natural seating and long, sociable relaxation.

Dual use: from chiller to hot bath

With the connected O'Spa Flow heat pump, enjoy a hot bath up to 40 °C for deep relaxation, or a cold bath down to 2 °C, ideal for sports recovery.*

Control your heat pump with the Poolex app.



*see O'Spa Flow product sheet

A complete pack*:

Reference BN-VALI98-PK

- Bath
- O'Spa Flow 5 kW heat pump
- Fittings and pre-filter
- Steps
- 70 mm thermal cover



*bath also available on its own

Olma

Wellness, made for sharing



Up to
2-4 people

5 kW heat
pump
heating + chiller

Thermo-
treated
pine cladding

LED lighting
& blower

The art of the Nordic bath, simply mastered.

Its round shape naturally invites sharing and togetherness. Paired with the O'Spa Flow heat pump with built-in circulation pump, it ensures controlled temperature, optimised energy use and lasting comfort, so you can make the most of every moment, with ease.



Sociable round shape: circular seating designed to encourage conversation and improve water circulation.



Thermo-treated pine frame & cladding

Excellent durability and longevity, ideal for year-round outdoor installation



Comfortable, high-performance tub

Reinforced fibreglass (vinylester & polyester resin), built to demanding technical standards, resistant from -50 °C to +70 °C.



Immersive comfort

Carefully designed ergonomics for natural seating and long, sociable relaxation.



Complete wellbeing experience

Create an atmosphere that suits you with LED lighting and enjoy a gently effervescent massage with the blower.

Dual use: from chiller to hot bath

With the connected O'Spa Flow heat pump, enjoy a hot bath up to 40 °C for deep relaxation, or a cold bath down to 2 °C, ideal for sports recovery.*

Control your heat pump with the Poolex app.



A complete pack*:

Reference BN-OLMA160-PK

- Bath
- O'Spa Flow 5 kW heat pump
- Fittings and pre-filter
- Steps
- 70 mm thermal cover



*see O'Spa Flow product sheet

*bath also available on its own

Oskar

The Nordic bath that adapts to your rhythm



Up to 6 people

7 kW heat pump and/or wood-burning stove

Thermo-treated pine cladding

LED lighting & blower

The freedom to heat it your way.

Its round shape encourages shared moments, while its flexible heating system — wood-burning stove, heat pump with built-in circulation pump, or both — lets you adapt your comfort to the seasons and your mood.



Sociable round shape: circular seating designed to encourage conversation and improve water circulation.



Thermo-treated pine frame & cladding

Excellent durability and longevity, ideal for year-round outdoor installation.



Comfortable, high-performance tub

Reinforced fibreglass (vinylester & polyester resin), built to demanding technical standards, resistant from -50 °C to +70 °C.



Immersive comfort

Carefully designed ergonomics for natural seating and long, sociable relaxation.



Complete wellbeing experience

Create an atmosphere that suits you with LED lighting and enjoy a gently effervescent massage with the blower.



The hybrid offer: from authenticity to connectivity

Choose your heating source:

- the **wood-burning stove** for its authentic, fast heat
- the **connected O'Spa Flow 7 kW heat pump**, which lets you control the temperature, whether for a hot bath up to 40 °C or a cold one down to 2 °C, as you wish.*



Control your heat pump with the Poolex app.

*see O'Spa Flow product sheet

A complete pack*:

Reference BN-OSKAR195-PK

- Bath
- Steps
- 70 mm thermal cover







O'Spa Flow 7 kW heat pump
+ Fittings and pre-filter



Wood-burning stove

*Includes either or both, bath also available on its own

Hilda

A character that stands out



Up to
4 people

Wood-burning
stove with optional
heat pump

Thermo-
treated
pine cladding

LED lighting
& blower

Where tradition meets modern comfort.

With its square shape and 4-person capacity, Hilda makes a statement with its structured, contemporary design. Its built-in wood-burning stove delivers an authentic experience, while the optional heat pump adds even more comfort and everyday convenience.

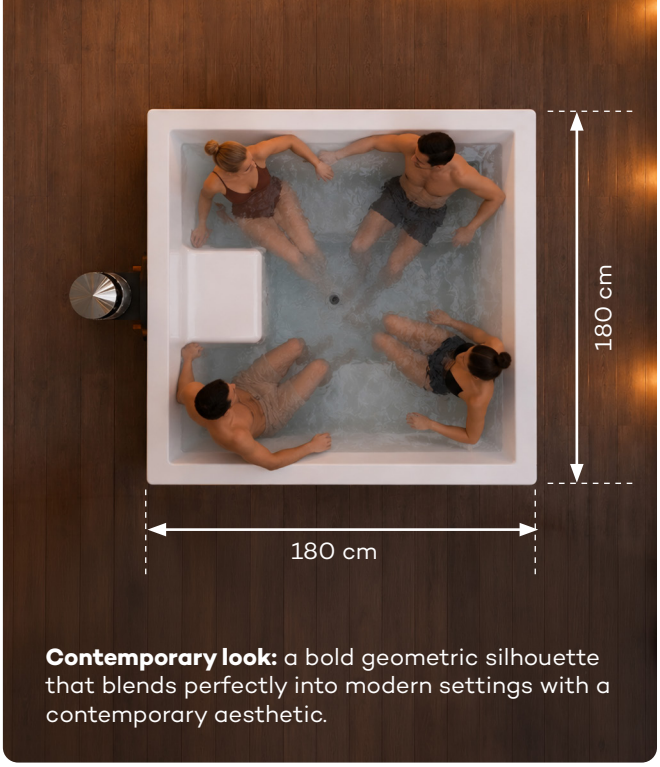

Contemporary look: a bold geometric silhouette that blends perfectly into modern settings with a contemporary aesthetic.



Thermo-treated pine frame & cladding

Excellent durability and longevity, ideal for year-round outdoor installation



Comfortable, high-performance tub

Reinforced fibreglass (vinylester & polyester resin), built to demanding technical standards, resistant from -50 °C to +70 °C.



Immersive comfort

Carefully designed ergonomics for natural seating and long, sociable relaxation.



Complete wellbeing experience

Create an atmosphere that suits you with LED lighting and enjoy a gently effervescent massage with the blower.



The hybrid offer: from authenticity to connectivity

Choose your heating source:

- the **wood-burning stove** for its authentic, fast heat
- the **connected O'Spa Flow 7 kW heat pump**, which lets you control the temperature, whether for a hot bath up to 40 °C or a cold one down to 2 °C, as you wish.*

Control your heat pump with the Poolex app.



*see O'Spa Flow product sheet

A complete pack:

Reference BN-HILDA180-PK
- Bath, built-in wood-burning stove with chimney
- Steps
- 70 mm thermal cover

Optional:
- O'Spa Flow 7 kW heat pump
- Fittings and pre-filter





NET SPA

A collection of semi-rigid spas and ice baths for a complete, accessible spa experience at home.

SEMI-RIGID SPAS

OCTOPUS



VITA
CLASSIC



VITA
PREMIUM



DROP-STITCH ICE BATHS

JÄRVI



UFC
OCTAGON



UFC
DUO



SEMI-RIGID SPAS

Octopus

LUXURY COMES TO YOUR GARDEN

For more info, scan

Optional furniture

Capacity: from 4 people

smart motor unit

Insulated cover

Octopus with furniture



Octopus, Vita and Vita Premium spas stand out with a carefully finished cabinet and an elegant design.

Their foam structure combines several advantages: quick assembly, greater rigidity than an inflatable spa, and better insulation thanks to the foam panels.

WARRANTIES

- **2 years**: structure and electronics



Module A



Module B



Module C



Module D



Module E

SEMI-RIGID SPAS

Vita | Classic & Premium

For more info, scan

BETWEEN RIGID AND INFLATABLE

THE PERFECT COMPROMISE



Optional furniture

Capacity: from 4 people

smart motor unit

Insulated cover

Vita with furniture



Octopus, Vita and Vita Premium spas stand out with a carefully finished cabinet and an elegant design.

Their foam structure combines several advantages: quick assembly, greater rigidity than an inflatable spa, and better insulation thanks to the foam panels.

WARRANTIES

- **2 years**: structure and electronics



Module A



Module B



Module C



Module D



Module E

Ice bath UFC

THE NEW-GENERATION ICE BATH

For more info, scan



Drop-stitch technology

Capacity: < 2 people
depending on model

Chiller compatible

Ice compatible

2 VERSIONS AVAILABLE

Netspa and UFC have joined forces to create a new-generation range of ice baths using advanced drop-stitch technology.

This cold plunge is designed to meet the demands of modern athletes, whether fighters or any other athletes looking to optimise their recovery.



OCTAGON



DUO

WARRANTIES

- **2 years**: structure and electronics

CHILLER COMPATIBLE

Cooling unit

The chiller electrically cools the water down to 3 °C, saving you from buying 50 kg of ice for every bath.



JÄRVI

COLD THERAPY

For more info, scan

Drop-stitch technology

Capacity: 2 people

Chiller compatible

Ice compatible

The Järvi is a drop-stitch tub designed for athletes and fitness enthusiasts who want to take ice baths. Its structure makes it both rigid and lightweight, so it is easy to transport and store.

WARRANTIES

- **2 years**: structure and electronics

COMPACT DIMENSIONS SUITED TO ALL BODY TYPES

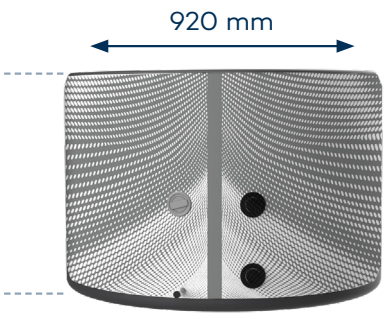



COMPLETE PACK INCLUDED

Enjoy it right away!

- Inflation pump
- Antibacterial cartridge *(chiller & circulation pump compatible)*
- Thermal cover
- D32 mm connection kit
- Carry bag
- Repair kit

ACCESSORIES



Cantilever parasol with built-in LEDs

Reference	Description
GD-UM2500BS	Complete parasol (base + parasol)
GD-BS600	Parasol base (only)
GD-UM2500	Parasol (only)

Cartridges and treatment



SP-N1407535



SP-N1408785



SP-N1408778
SP-N1408785



JL-P14106



SP-NOXYTAB-20

Accessories



SP-N1405173



SP-NHEAD809



SP-NCUSH786



SP-N1405548



SP-N1405227



SP-CLEANER-15



SP-CLEANER-25

SP-N1405869
SP-N1414014

SP-N1405203

SP-N1405210

Spa accessories

Reference	Description
SP-N1407535	New-generation filter cartridge (pack of 3)
SP-N1408761	Filter holder unit with antibacterial cartridge
SP-N1408778	Antibacterial filter cartridges (pack of 3) for inflatable spas and Octopus + Vita semi-rigid spas
SP-N1408785	Antibacterial filter cartridges (pack of 3) for Vita Premium
JL-P14106	Pureflow filter cartridges for Netspa spas
SP-NOXYTAB-20	Netspa active oxygen treatment - 20 × 20 g tablets
SP-N1405173	2 x headrests & 1 x cup holder for inflatable spa
SP-NHEAD809	Netspa headrest & cup holder (2-in-1) for Octopus
SP-NCUSH786	Netspa comfort foam seat cushion for spa - pack of 2
SP-N1405548	Foot bath
SP-N1405227	Inflatable bar
SP-CLEANER-15	Netspa Cleaner - Spa vacuum
SP-CLEANER-25	Netspa Cleaner Super Vac - Spa vacuum with telescopic pole
SP-N1405869	Inflatable lid for 4-seat square spa - 128 × 128 cm
SP-N1414014	Inflatable lid for 4-seat square spa - 135 × 135 cm
SP-N1405203	Inflatable lid for 4-seat round spa - Ø 140 cm
SP-N1407528	Inflatable lid for 5/6-seat octagonal spa - 155 × 155 cm


France Sauna
The home sauna experience becomes accessible and fits naturally into everyday life, so you can enjoy a true moment of relaxation and wellbeing at home.

INDOOR SAUNA
STEAM



ZEN



SENSE

INDOOR SAUNA
INFRARED



SENSE IR



APOLLON

Assembly and installation service
reference: SERV-SN-EDM01

Available throughout France for all indoor models:
- Qualified, certified professional
- Full management and follow-up by POOLSTAR

OUTDOOR SAUNA
GAÏA RANGE



URBAN



NOVA



BELLA



LUNA

Assembly and installation service
reference: SERV-SN-EDM03

Available throughout France for all outdoor models:
- Qualified, certified professional
- Full management and follow-up by POOLSTAR

STEAM SAUNA

Zen

For more info, scan

THE TRADITIONAL FINNISH SAUNA CABIN

Canadian spruce wood

4 versions
2 to 6 seats

Steam technology

Harvia Vega electric heater + stones and sauna kit included (bucket + ladle + thermometer and hygrometer)

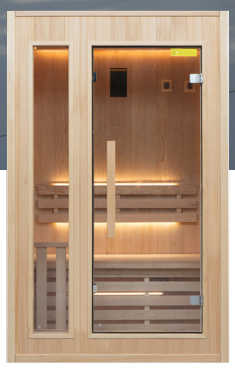

Zen 2 seats



Zen 3 seats



Zen 3/4 seats



Zen 6 seats

The Zen sauna range celebrates the authenticity of the Finnish sauna with its Canadian spruce cabin and Harvia lava-stone heater. Its enveloping heat, comfortable benches and soft LED lighting create a warm atmosphere, ideal for treating yourself to a true moment of relaxation.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

FSC™ www.fsc.org 100% Wood from well-managed forests FSC™ C229706

STEAM SAUNA

Sense

THE PANORAMIC TRADITIONAL SAUNA

For more info, scan

Canadian spruce wood

3 versions
3 to 4 seats

Steam technology





Sense 3 seats



Sense 3-seat corner



Sense 4 seats





Sauna pack included

The Sense sauna range reinvents the traditional sauna with a contemporary, panoramic design. Its large glazed surface creates a pleasant sense of space, while the Harvia heater spreads an enveloping warmth. Canadian spruce and built-in LED lighting create a warm, soothing ambience.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

INFRARED SAUNA

Sense IR

INFRARED ICE BATH

For more info, scan

Canadian hemlock wood

3 versions
2 to 3 seats

Infrared technology





Sense 2



Sense 2C



Sense 3

The Sense IR sauna range pairs contemporary design with Dual Healthy technology, combining quartz and magnesium for heat that is both deep and enveloping. Its extensively glazed cabin, LED chromotherapy and digital control panel deliver a comfortable, immersive and customisable infrared experience.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

INFRARED SAUNA

Apollon

A BUBBLE OF WELLBEING

For more info, scan

Canadian spruce wood

4 versions
1 to 4 seats

Infrared technology



1 seat | 2 seats | 2/3 seats | 3 seats | 3/4 seats

The Apollon sauna range harnesses the power of Full Spectrum Quartz to quickly deliver deep, targeted heat. Individually controllable emitters let you customise every session, while chromotherapy, built-in audio and an ioniser round out an infrared experience devoted to wellbeing and relaxation.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

FSC™ www.fsc.org 100% Wood from well-managed forests FSC™ C229706

OUTDOOR SAUNA

GAÏA Urban

AN ULTRA-COMPACT BUBBLE OF WELLBEING

For more info, scan

- Ultra-compact format
- Up to 2 seats
- Chromotherapy LED lighting



Light oak stain

Medium oak stain

Dark oak stain

The Urban outdoor sauna fits terraces and small spaces. Made from heat-treated Canadian pine, it withstands the weather while keeping a natural look.

Equipped with a steam heater and a chromotherapy LED strip, it offers a soothing atmosphere for relaxing alone or for two. Offered by France Sauna.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

OUTDOOR SAUNA

GAÏA Nova

THE SAUNA COMPATIBLE WITH A WOOD-BURNING STOVE

For more info, scan

Two-level bench

6 seated
or 3 lying down

Wood-burning stove compatible



Light oak stain



Medium oak stain



Dark oak stain

The Gaïa Nova brings together all the standards of a high-end cabin in a compact format. Seating 6, with a two-level bench, folding backrest and headrest, it offers a genuine Finnish experience. Let yourself be won over by the scent of spruce and the chromotherapy ambience of the 7-colour LEDs.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

OUTDOOR SAUNA

GAÏA Bella

A HAVEN OF PEACE

COMPACT AND COMFORTABLE

For more info, scan

Two-level bench

3 seated
or 1 lying + 1 seated

Traditional design



Light oak stain | Medium oak stain | Dark oak stain

The Gaïa Bella is made to be enjoyed for two: its steam heat stimulates circulation, soothes muscles, boosts the immune system and flushes out toxins, enhanced by chromotherapy. Its two-level cabin features a fold-away upper bench with built-in headrest. In light spruce, compact and fitted with louvred windows, it brings Scandinavian charm to your garden.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

OUTDOOR SAUNA

GAÏA Luna

THE TRADITIONAL OUTDOOR SAUNA

For more info, scan

Two-level bench

6 seated or 3 lying down

Outdoor terrace



Light oak stain

Medium oak stain

Dark oak stain

The Gaïa Luna awakens all the senses with its indoor and outdoor relaxation areas. It welcomes up to 6 people for a traditional sauna session, with a terrace and two seats for enjoying a drink while taking in the view. Made of solid spruce, with a fold-away bench and a rounded design that spreads heat evenly, it features remote-controlled chromotherapy lighting.

WARRANTIES

- **7 years**: woodwork
- **2 years**: electronics

Poolstar

CUSTOMER SERVICE

FOR PROFESSIONALS

Monday to Friday
9:00 am–12:30 pm and 2:00–5:00 pm*

*(*Open until 6:00 pm from mid-March to mid-September)*

04 91 46 60 50

CUSTOMER SERVICE

FOR INDIVIDUALS

24/7
assistance.poolstar.fr

www.poolstar.fr

IMPRIM'VERT®
©2026 - 5810

FSC
www.fsc.org
MIXTE
Papier | Pour une gestion forestière responsable
FSC® C149082

This catalogue was printed on paper from sustainably managed forests using vegetable-based inks, to reduce the environmental impact of its printing.

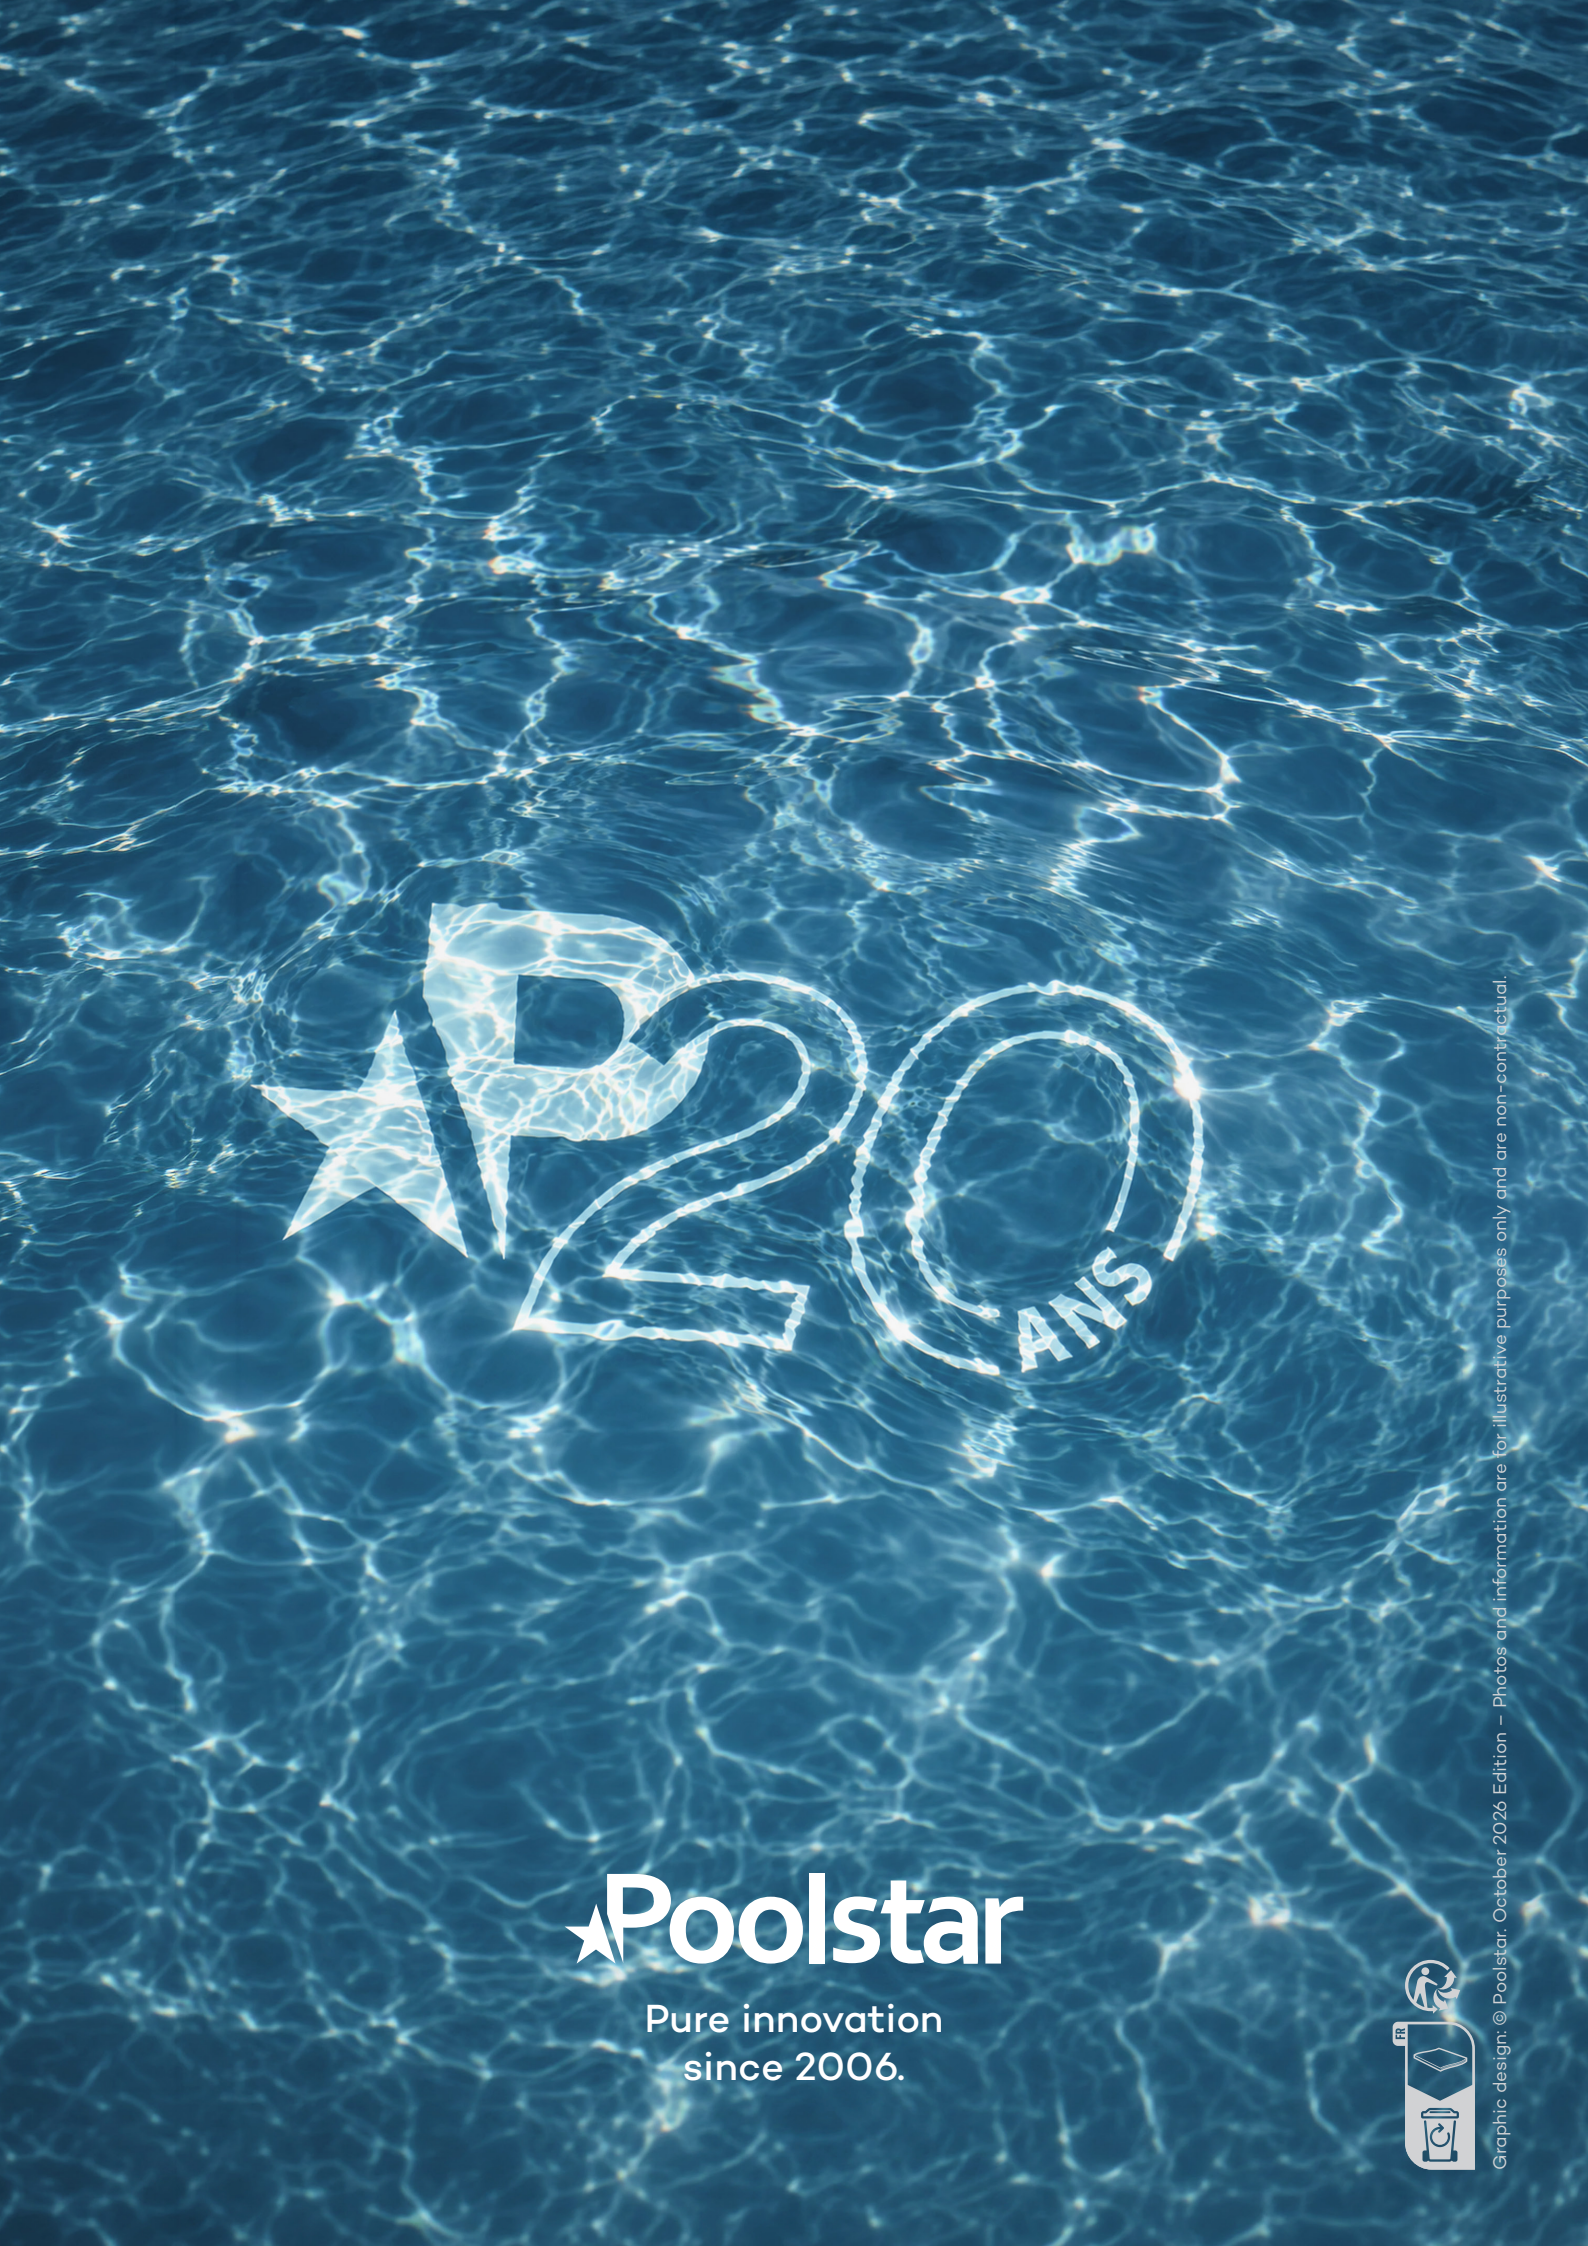

Poolstar

Pure innovation
since 2006.

Graphic design: © Poolstar. October 2026 Edition – Photos and information are for illustrative purposes only and are non-contractual.